



## LED 2023














- > Dimmable
- > For mounting in drilled hole with clip fastener or for screw mounting
- > Driver see page 56
- > Drill bit see page 152



- Surface mounted trim ring, square, Plastic
- > silver colored Item No. 833.72.834 **SRP \$4.00**
- chrome-plated Item No. 833.72.835 SRP \$4.00

## Note


IP20 protection with surface mounted trim ring.

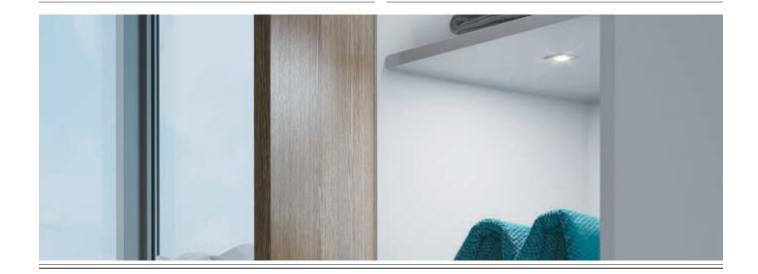

## Recess/surface mounted lights


Monochrome, drill hole Ø: 26 mm (1")




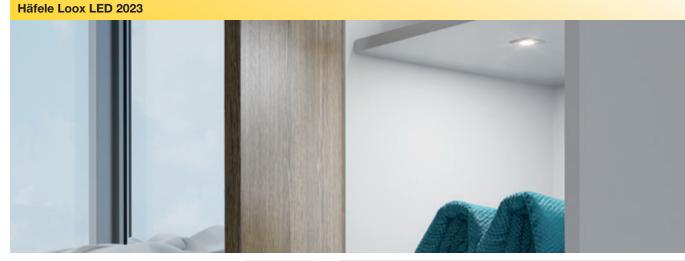









Recess mounting

Surface Mounting

3000 K	4000 K	5000 K	90°		
000011	100011	000011			
650 lx	650 lx	650 lx	崇	250 mm	(9 13/16")
163 lx	163 lx	163 lx		500 mm	(19 11/16")
72 lx	72 lx	72 lx	*	750 mm	(29 1/2")
40 lx	40 lx	40 lx	*	1000 mm	(39 3/8")

> Dimmable: > Material: Aluminum

 $> L \times W$ : 30 x 30 mm (1 3/16" x 1 3/16")

> Energy efficiency class: A+

> Degree of protection: IP44 as recess mounted light

IP20 as surface mounted light

> Number of LEDs:

> Mounting: For mounting in drilled hole, for

clamp fixing

> Drill hole Ø: 26 mm (1")

> Supplied with: 1 light with 2000 mm (78 3/4") lead



Loox5 12 V driver see page 124 Please order 6-piece adapter set 833.95.753 separately, see page 116.



The IP44 degree of protection is reduced to IP20 when surface mounting or recess mounting with through hole.



Loox lights and drivers are "Suitable for use within closet storage spaces"



> Housing, square, Plastic

Color	Item No.
Silver colored	833.72.834
Chrome-plated	833.72.835

< Voltage	A Color temperature	✓ Wattage	E Luminous	Luminous A efficacy	"a Color rendering index CRI	Weighted energy consumpt.	Silver colored anodized	Polished chrome- plated
12 V	3000	1.5	105	70	82	1.65	833.72.064	833.72.060
	4000	1.5	105	70	82	1.65	833.72.065	833.72.061
	5000	1.5	105	70	82	1.65	833.72.066	833.72.062

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice