

# LED DRIVER

## CONSTANT VOLTAGE PLUG-IN DRIVER

### 12 V SYSTEM



- > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2
- > Efficiency level VI




| Item No.                   | 833.74.934                                 | 833.74.936                                    | 833.74.938                              |
|----------------------------|--------------------------------------------|-----------------------------------------------|-----------------------------------------|
| SRP                        | \$12.00                                    | \$20.00                                       | \$30.00                                 |
| L x W x H                  | 61 x 37 x 57<br>(2 3/8" x 1 1/2" x 2 1/4") | 78 x 46 x 68<br>(3 1/16" x 1 13/16" x 2 5/8") | 84 x 50 x 72<br>(3 5/16" x 2" x 2 7/8") |
| Stand-by Power Consumption | 0.1 W                                      |                                               |                                         |
| Input voltage              | 100-240 V; 50-60 Hz                        |                                               |                                         |
| Output voltage             | 12 VDC                                     |                                               |                                         |
| Wattage                    | 6                                          | 15                                            | 27                                      |
| Degree of protection       | IP 20                                      |                                               |                                         |
| Number of slots            | 1 socket for lead                          |                                               |                                         |
| Material/Finish            | Plastic, black                             |                                               |                                         |

#### Note

Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"



2 connections

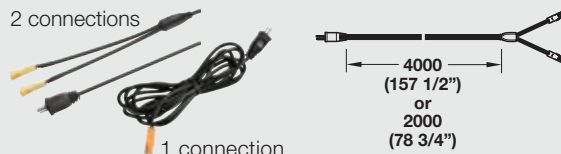


1 connection

Secondary lead 12 V, Plastic, black

- > 4 m (157 1/2") Item No. 833.74.749 **SRP \$8.00** with 2 connections
- > 2 m (78 3/4") Item No. 833.74.791 **SRP \$8.00** with 1 connection


#### Note

4 m (157 1/2") has 2 connections; 2 m (78 3/4") has 1 connection.

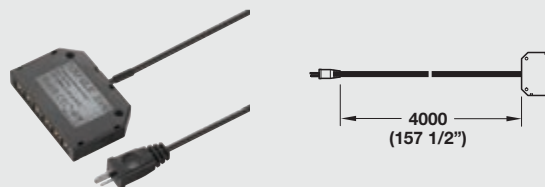


Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

- > Item No. 833.74.748 **SRP \$12.00**

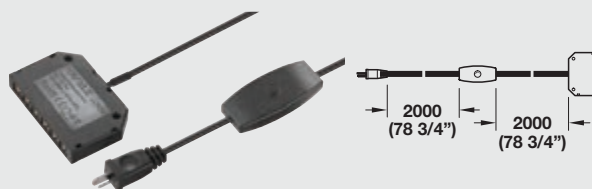

Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

- > Item No. 833.74.709 **SRP \$30.00**

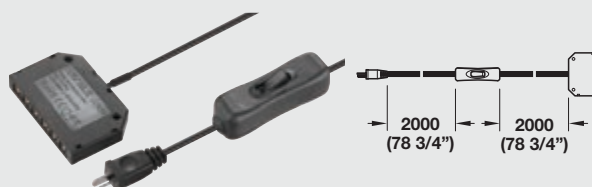

Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor

- > Item No. 833.74.746 **SRP \$24.00**

# Drivers

12 V

## Häfele Loox wall plug driver 12 V




Driver 15 W US  
833.74.936


- > Material/Color: Plastic, black
- > Degree of protection: IP20
- > Input voltage: 100–240 V~; 50–60 Hz
- > Output voltage: DC 12 V
- > Standby power consumption: 0.1 W
- > Supplied with: 1 wall plug driver

| Plug design/<br>designation | Output<br>power W | L x W x H                                     | Item No.          |
|-----------------------------|-------------------|-----------------------------------------------|-------------------|
| US                          | 6                 | 61 x 37 x 43<br>(2 3/8" x 1 1/2" x 1 11/16")  | <b>833.74.934</b> |
|                             | 15                | 78 x 46 x 54<br>(3 1/16" x 1 13/16" x 2 1/8") | <b>833.74.936</b> |
|                             | 27                | 84 x 50 x 72<br>(3 5/16" x 2" x 2 7/8")       | <b>833.74.938</b> |


## Häfele Loox leads 12 V




833.74.749



833.74.748



833.74.709



833.74.746

- > Length: 4000 mm (157 1/2")

| 12 V | Plug design/<br>designation                           | Item No.          |
|------|-------------------------------------------------------|-------------------|
|      | 2.5 A/22 AWG with 2 slots                             | <b>833.74.749</b> |
|      | 2.5 A/22 AWG with 6-way distributor                   | <b>833.74.748</b> |
|      | 2.5 A/22 AWG with dimmer and 6-way distributor        | <b>833.74.709</b> |
|      | 2.5 A/22 AWG with rocker switch and 6-way distributor | <b>833.74.746</b> |

- > Length: 2000 mm (78 3/4")

| 12 V | Plug design/<br>designation | Item No.          |
|------|-----------------------------|-------------------|
|      | 2.5 A/22 AWG with 1 slot    | <b>833.74.791</b> |



12 V 5 12 V

All sockets for 12 V Loox. Please order 6-piece adapter set 833.95.752 for Loox5 devices separately, see page 117.



### Note

Loox lights and drivers are "Suitable for use within closet storage spaces"