

LED DRIVER

CONSTANT VOLTAGE PLUG-IN DRIVER

12 V SYSTEM



- > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2
- > Efficiency level VI



Item No.	833.74.934	833.74.936	833.74.938
SRP	\$12.00	\$20.00	\$30.00
L x W x H	61 x 37 x 57 (2 3/8" x 1 1/2" x 2 1/4")	78 x 46 x 68 (3 1/16" x 1 13/16" x 2 5/8")	84 x 50 x 72 (3 5/16" x 2" x 2 7/8")
Stand-by Power Consumption	0.1 W		
Input voltage	100-240 V; 50-60 Hz		
Output voltage	12 VDC		
Wattage	6	15	27
Degree of protection	IP 20		
Number of slots	1 socket for lead		
Material/Finish	Plastic, black		

Note

Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"



2 connections




1 connection

Secondary lead 12 V, Plastic, black

- > 4 m (157 1/2") Item No. 833.74.749 **SRP \$8.00** with 2 connections
- > 2 m (78 3/4") Item No. 833.74.791 **SRP \$8.00** with 1 connection


Note

4 m (157 1/2") has 2 connections; 2 m (78 3/4") has 1 connection.

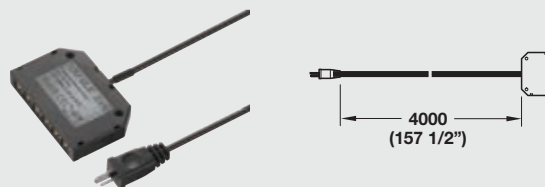


Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

- > Item No. 833.74.748 **SRP \$12.00**

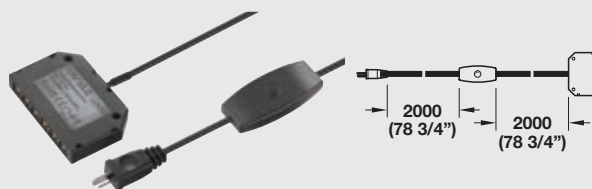

Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

- > Item No. 833.74.709 **SRP \$30.00**

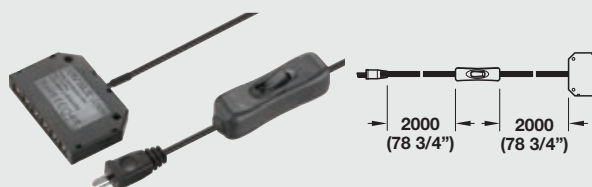

Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor

- > Item No. 833.74.746 **SRP \$24.00**

Drivers

12 V

Häfele Loox wall plug driver 12 V




Driver 15 W US
833.74.936


- > Material/Color: Plastic, black
- > Degree of protection: IP20
- > Input voltage: 100–240 V~; 50–60 Hz
- > Output voltage: DC 12 V
- > Standby power consumption: 0.1 W
- > Supplied with: 1 wall plug driver

Plug design/ designation	Output power W	L x W x H	Item No.
US	6	61 x 37 x 43 (2 3/8" x 1 1/2" x 1 11/16")	833.74.934
	15	78 x 46 x 54 (3 1/16" x 1 13/16" x 2 1/8")	833.74.936
	27	84 x 50 x 72 (3 5/16" x 2" x 2 7/8")	833.74.938


Häfele Loox leads 12 V




833.74.749



833.74.748



833.74.709



833.74.746

- > Length: 4000 mm (157 1/2")

12 V	Plug design/ designation	Item No.
	2.5 A/22 AWG with 2 slots	833.74.749
	2.5 A/22 AWG with 6-way distributor	833.74.748
	2.5 A/22 AWG with dimmer and 6-way distributor	833.74.709
	2.5 A/22 AWG with rocker switch and 6-way distributor	833.74.746

- > Length: 2000 mm (78 3/4")

12 V	Plug design/ designation	Item No.
	2.5 A/22 AWG with 1 slot	833.74.791



12 V 5 12 V

All sockets for 12 V Loox. Please order 6-piece adapter set 833.95.752 for Loox5 devices separately, see page 117.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"