

Flexible surface mounted lights

Monochrome with USB, 12 V/24 V

ILLUMINATING

EXTENDING


SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING

Häfele Loox5 LED 2034/3034

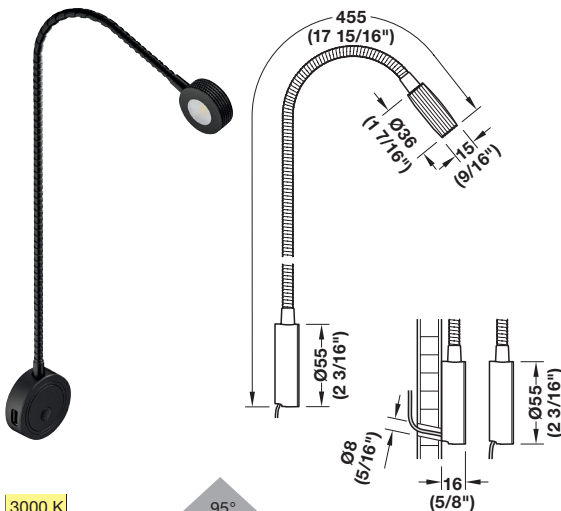

3000 K	95°	
845 lx		250 mm (9 13/16")
220 lx		500 mm (19 11/16")
100 lx		750 mm (29 1/2")
60 lx		1000 mm (39 3/8")



Lead, 5 A/18 AWG, with snap-in connector

Voltage V	2.0 meter	1.0 meter
5 12 V	833.95.830	833.95.831
5 24 V	833.95.835	833.95.836

- > Version: Integrated 5 V / 2.5 A USB charging station; push button switch for 2 brightness levels; magnetic cover for base; modular power lead
- > Material: Aluminum
- > L x W x H: 455 x 55 x 15.5 mm (17 15/16" x 2 3/16" x 5/8")
- > Color temperature: 3000 K (warm white)
- > Wattage (including USB): Max. 17 W (light 1.5 W)
- > Luminous flux: 120 lm
- > Luminous efficacy: 80 lm/W
- > Color rendering index Ra: ≥90
- > Mounting: For screw mounting under magnetic cover
- > Supplied with: 1 light, including mounting materials

Order reference
Please order 5A modular lead separately

Loox 12 V drivers see pages 174–175
Loox 24 V drivers see pages 176–177
Min. 20 W driver per light for optimum operation of the USB charging station.

Voltage V	Black	Chrome-plated
5 12 V	833.74.088	833.74.089
5 24 V	833.75.088	833.75.089

