
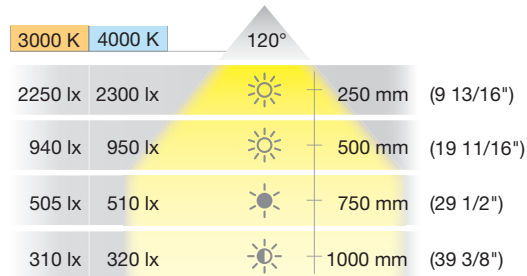


Surface mounted light bars

With linkable cable, 12 V

Profile 2191 with Loox LED 2068

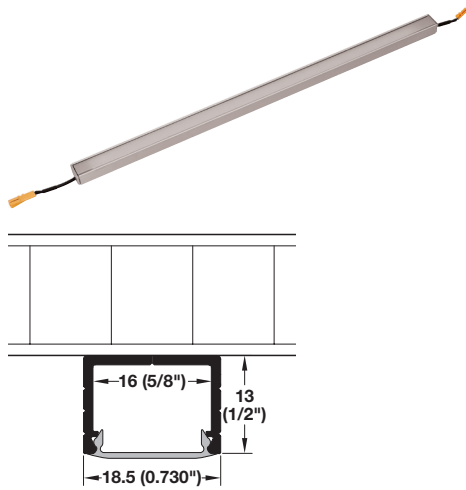

- > CRI 90 light are Title 24 compliant and offer more vibrant, true color rendering than lower CRI products
- > Life time: 50,000 hours
- > Supplied ready to install
- > Optimal lengths for installing under your wall cabinets to brighten up your countertop workspace
- > Linkable to other light bars see page 96



Loox 12 V drivers see pages 174–175



Note

Designed for use within closet storage spaces.

Components

- > Profile: 2191 - see page 56.
- > LED strip: 2068 - see page 30.
- > Mounting brackets: see page 56.
- > Lead cables: 100 mm (4") male and female

Light Color (K)	3000 (warm white)				4000 (cool white)			
Lumen per watt	101				104			
Item No.	833.88.700	833.88.701	833.88.702	833.88.703	833.88.714	833.88.715	833.88.716	833.88.717
Length	152 (6")	229 (9")	305 (12")	381 (15")	152 (6")	229 (9")	305 (12")	381 (15")
Wattage	1.0	1.7	2.4	3.1	1.0	1.7	2.4	3.1
LEDs	12	21	30	39	12	21	30	39
Lumen	97	170	243	315	100	175	250	325
Item No.	833.88.704	833.88.705	833.88.706	833.88.707	833.88.718	833.88.719	833.88.720	833.88.721
Length	457 (18")	533 (21")	610 (24")	686 (27")	457 (18")	533 (21")	610 (24")	686 (27")
Wattage	3.8	4.6	5.3	6.0	3.8	4.6	5.3	6.0
LEDs	48	57	66	75	48	57	66	75
Lumen	388	461	534	606	400	475	550	625
Item No.	833.88.708	833.88.709	833.88.710	833.88.711	833.88.722	833.88.723	833.88.724	833.88.725
Length	762 (30")	832 (33")	915 (36")	991 (39")	762 (30")	832 (33")	915 (36")	991 (39")
Wattage	6.7	7.4	8.2	8.9	6.7	7.4	8.2	8.9
LEDs	84	93	102	111	84	93	102	111
Lumen	679	752	825	897	700	775	850	925
Item No.	833.88.712		833.88.713		833.88.726		833.88.727	
Length	1067 (42")		1143 (45")		1067 (42")		1143 (45")	
Wattage	9.6		10.3		9.6		10.3	
LEDs	120		129		120		129	
Lumen	970		1043		1000		1075	
CRI	90*							
Material	Aluminum; Lens: Plastic, opal							
Supplied with	100 mm (4") male mini driver cable, 100 mm (4") female mini driver cable, mounting brackets							

*JA8-2016-E          IP20