

LOOX LED DRIVER

CONSTANT VOLTAGE 12 V

12 V SYSTEM

**THIN
PROFILE**


1 Item No. 833.74.960
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$

2 Item No. 833.74.962
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$

3 Item No. 833.74.913
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 60 \text{ W}$

max. 42 W per light output

max. 30 W per light output for 833.74.913

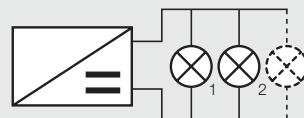

Parallel connection



- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 42 W per light output
- > Lead length from driver to switch: Max.: 6 m (236 1/4")
- > Drivers must be mounted in well ventilated area



- > Class 2
- > Efficiency Level VI
- > Degree of Protection: IP20
- > Loxx drivers cannot be controlled by a dimmer wall switch

Item No.	833.74.960 1	833.74.962 2	833.74.913 3
SRP	\$36.00	\$60.00	\$72.00
L x W	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	208 x 56.5 x 30 (8 13/16" x 2 1/4" x 1 3/16")
Wattage	0 – 20	0 – 40	0 – 60
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	12 V DC		
Output current	1.67 A	3.33 A	5.0 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		

Note

Loxx Lights and Drivers are "Suitable for use within Closet Storage Spaces"



- > Switches see pages 113 - 116
- > Extension leads see page 127



- Power cord with 90° plug
2 m (78 3/4")
- > Item No. 833.89.017 **SRP \$5.00**



- 90° Plug adapter
- > Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads

3 m (118")

Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120



LOOX LED DRIVER

CONSTANT VOLTAGE 24 V

24 V SYSTEM

THIN PROFILE

- 1 Item No. 833.77.945
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$
- 2 Item No. 833.77.947
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$
- 3 Item No. 833.77.949
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 90 \text{ W}$
max. 84 W per light output

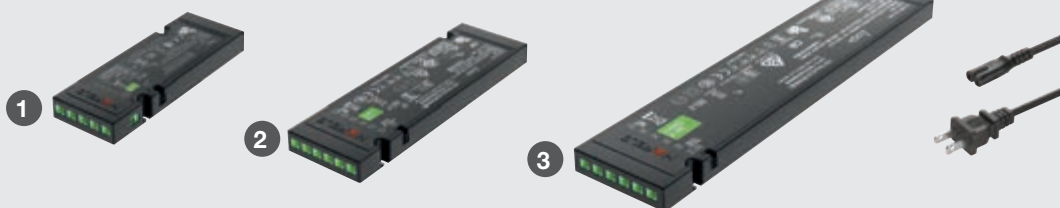

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 84 W per light output
- > Lead length from driver to switch: Max. 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of Protection: IP20
- > Loxx drivers cannot be controlled by a dimmer wall switch

Item No.	833.77.945 ❶	833.77.947 ❷	833.77.949 ❸
SRP	\$36.00	\$60.00	\$120.00
L x W x H	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	316 x 70 x 16 (8 3/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 90
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	24 V DC		
Output current	0.83 A	1.67 A	3.75 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		
Note	Loox Lights and Drivers are “Suitable for use within Closet Storage Spaces”		



- > Switches see pages 119 - 122
- > Extension leads see page 133



Power cord with 90° plug, Plastic, black
2 m (78 3/4")

- > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter, Plastic, black
> Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads

3 m (118")


Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120

LOOX LED DRIVER

CONSTANT VOLTAGE 350 mA DRIVER

0 100%

350-mA SYSTEM

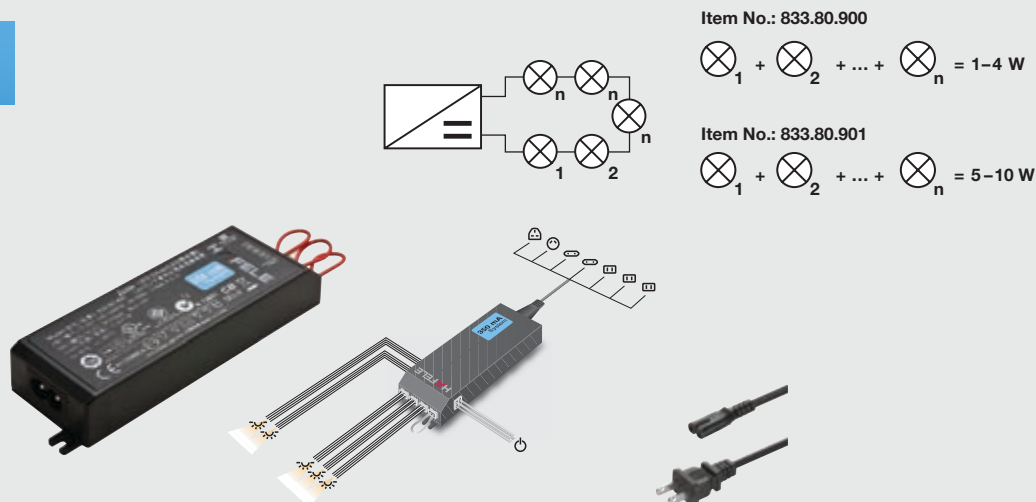

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches



- > Degree of Protection: IP20
- > Loox drivers cannot be controlled by a dimmer wall switch



- > Switches see pages 116 - 119
- > Extension leads see page 133



Power cord with 90° plug
 2 m (78 3/4")
 > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter
 > Item No. 833.89.018 **SRP \$7.00**

Replacement jumper cable
 > Item No. 833.80.720 **SRP \$0.50**

Item No.	833.80.900	833.80.901
SRP	\$30.00	\$50.00
L x W x H	140 x 43 x 20 (5 1/2" x 1 11/16" x 13/16")	195 x 43 x 28 (7 11/16" x 1 11/16" x 1 1/8")
Wattage	1 - 4	5 - 10
Input voltage	100-240 V; 50-60 Hz	
Output current	350 mA	
Number of slots	4	10
Material/Finish	Plastic, black	
Supplied with	Mounting accessories, US power cord	

Country-specific 2 m (78 3/4") primary leads

Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120

ACCESSORIES

PRIMARY LEADS AND CABLE CHANNELS

Power Cord with 90° plug		
	Item No.	833.89.017
	SRP	\$5.00
	Length	2 m (78 3/4")
	Material/Finish	Plastic, black

90° Plug Adapter		
	Item No.	833.89.018
	SRP	\$7.00
	Material/Finish	Plastic, black

Country-specific 2 m (78 3/4") primary leads; 833.89.008 is 3 m (118")				
Country	UK	AU	EU	US
Voltage	250	250	250	120
				
Item No.	833.89.000	833.89.001	833.89.002	833.89.003
SRP	\$10.00	\$4.00	\$4.00	\$4.00
Country	US	JP	CN	US
Voltage	120	120	250	120
				
Item No.	833.89.008	833.89.016	833.89.005	833.89.050
SRP	\$6.00	\$4.00	\$4.00	\$4.00