

LED strip lights


Monochrome, 5 mm (3/16")

Häfele Loox5 LED 2060/2061/3040/3041

Voltage	Quantity	Color temperature	Wattage	Luminous flux	Luminous efficacy	Color rendering index CRI		Weighted energy consumpt.	Section length C	Length of contact surface P	Max. strip length (visual)	Available length	
V	LEDs/m	K	W/m	lm/m	lm/W	R _a	R ₉	kWh/1000 h				5 m (196 7/8")	15 m (590 9/16")
5 12 V	LED 2060		*	*									
	120	2700	4.8	440	92	>90	>50	5.28	25 (1")	3 (1/8")	4.0 (157 1/2")	833.74.320	833.74.324
		3000	4.8	460	96	>90	>50	5.28	25 (1")	3 (1/8")	4.0 (157 1/2")	833.74.321	833.74.325
		4000	4.8	480	100	>90	>50	5.28	25 (1")	3 (1/8")	4.0 (157 1/2")	833.74.322	833.74.326
		5000	4.8	495	103	>90	>50	5.28	25 (1")	3 (1/8")	4.0 (157 1/2")	833.74.323	833.74.327
	LED 2061												
	120	2700	9.6	870	91	>90	>50	10.56	25 (1")	3 (1/8")	3.0 (118 1/8")	833.74.328	833.74.332
		3000	9.6	830	97	>90	>50	10.56	25 (1")	3 (1/8")	3.0 (118 1/8")	833.74.329	833.74.333
		4000	9.6	955	99	>90	>50	10.56	25 (1")	3 (1/8")	3.0 (118 1/8")	833.74.330	833.74.334
		5000	9.6	990	103	>90	>50	10.56	25 (1")	3 (1/8")	3.0 (118 1/8")	833.74.331	833.74.335
5 24 V	LED 3040												
	120	2700	4.8	440	92	>90	>50	5.28	50 (2")	3 (1/8")	8.0 (314 15/16")	833.76.300	833.76.304
		3000	4.8	460	96	>90	>50	5.28	50 (2")	3 (1/8")	8.0 (314 15/16")	833.76.301	833.76.305
		4000	4.8	480	100	>90	>50	5.28	50 (2")	3 (1/8")	8.0 (314 15/16")	833.76.302	833.76.306
		5000	4.8	495	103	>90	>50	5.28	50 (2")	3 (1/8")	8.0 (314 15/16")	833.76.303	833.76.307
	LED 3041												
	120	2700	9.6	870	91	>90	>50	10.56	50 (2")	3 (1/8")	5.5 (216 9/16")	833.76.308	833.76.312
		3000	9.6	930	97	>90	>50	10.56	50 (2")	3 (1/8")	5.5 (216 9/16")	833.76.309	833.76.313
		4000	9.6	955	99	>90	>50	10.56	50 (2")	3 (1/8")	5.5 (216 9/16")	833.76.310	833.76.314
		5000	9.6	990	103	>90	>50	10.56	50 (2")	3 (1/8")	5.5 (216 9/16")	833.76.311	833.76.315



Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Maximum wattage-dependent strip length on the driver, see pages 140–141.



> 3.5 A/20 AWG lead
for 5 mm (3/16") LED strip light


Voltage	Length	Item No.
5 12 V	100 (4")	833.93.740
	2000 (78 3/4")	833.95.705
5 24 V	100 (4")	833.93.741
	2000 (78 3/4")	833.95.711



> 3.5 A Clip connector
for 5 mm (3/16") LED strip light

> Supplied with: 10 pcs.

	Item No.
	833.89.207



> 3.5 A/20 AWG interconnecting lead
for 5 mm (3/16") LED strip light

Length	Item No.
50 (2")	833.89.194
500 (19 11/16")	833.89.195
2000 (78 3/4")	833.89.196



> 3.5 A Corner connector, 90° rigid,
left or right, for 5 mm (3/16") LED strip light

> Supplied with: 10 pcs.


	Item No.
	833.89.190

*See page 158 for conversion chart.

Leads

For LED strip light monochrome, 5 mm (3/16")

Häfele Loox5 lead - for LED strip light monochrome, 5 mm (3/16")

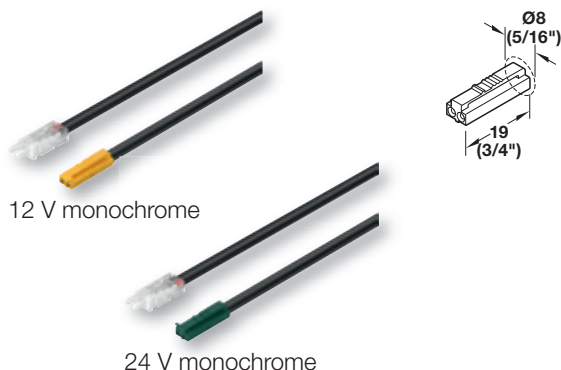

- > Current carrying capacity: Max. 3.5 A
- > Type of cable: 2-wire 20 AWG
- > Width: Clip 7 mm (1/4")
- > Drill hole Ø: Plug 8 mm (5/16")
- > Length: 2000 mm (78 3/4")
- > Supplied with: 1 lead plug/clip

Voltage	Item No.
5 12 V	833.95.705
5 24 V	833.95.711

Häfele Loox5 interconnecting lead - for LED strip light monochrome, 5 mm (3/16")



- > Current carrying capacity: Max. 3.5 A
- > Type of cable: 2-wire 20 AWG
- > Width: Clip 7 mm (1/4")
- > Drill hole Ø: Clip 10 mm (3/8")
- > Supplied with: 1 interconnecting lead clip/clip

Length	Item No.
50 (2")	833.89.194
500 (19 11/16")	833.89.195
2000 (78 3/4")	833.89.196

Häfele Loox5 clip connector - for LED strip light monochrome, 5 mm (3/16")



- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 7 mm (1/4")
- > Drill hole Ø: Clip 10 mm (3/8")
- > Length: 33.5 mm (1 5/16")
- > Supplied with: 10 pcs.

Item No.
833.89.207

Häfele Loox5 corner connector - for LED strip light monochrome, 5 mm (3/16")



- > Current carrying capacity: Max. 3.5 A
- > L x W: 21 x 21 mm (13/16" x 13/16")
- > Supplied with: 10 pcs.

Item No.
833.89.190