

LED strip lights


Multi-white, 8 mm (5/16")

Häfele Loox5 LED 2064 / 2070 / 3044 / 3047 / 3049 / 3060 / 3061

Voltage	Quantity	Color temperature	Wattage	Luminous flux	Luminous efficacy	Color rendering index CRI		Weighted energy consumpt.	Section length C	Length of contact surface P	Max. strip length (visual)	Available length		
												5 m (196 7/8")	15 m (590 9/16")	50 m (1968 1/2")
5 12 V	LED 2064		*	*										
	2 x 60	2700 5000	4.8	425 465	89 97	>90	>50	5.28	50 (2")	4 (3/16")	4.5 (177 3/16")	833.74.352	-	833.74.353
	LED 2070													
	2 x 120	2700 5000	9.6	825 930	86 97	>90	>50	10.56	25 (1")	3.5 (1/8")	3.5 (137 13/16")	833.74.370	-	833.74.371
5 24 V	LED 3044													
	2 x 120	2700 5000	4.8	425 465	89 97	>90	>50	5.28	50 (2")	3.5 (1/8")	8.5 (334 5/8")	833.76.332	-	833.76.333
	LED 3047													
	2 x 120	2700 5000	9.6	825 930	86 97	>90	>50	10.56	50 (2")	3.5 (1/8")	6.5 (255 7/8")	833.76.350	-	833.76.351
	LED 3049													
	2 x 120	2700 5000	14.4	1230 1370	85 95	>90	>50	15.84	50 (2")	3.5 (1/8")	5.0 (196 7/8")	833.76.360	-	833.76.361
	LED 3060 Silicone													
	2 x 120	2700 5000	4.8	425 465	89 97	>90	>50	5.28	50 (2")	3.5 (1/8")	8.5 (334 5/8")	833.76.387	833.76.388	-
	LED 3061 Silicone													
	2 x 120	2700 5000	9.6	825 930	86 97	>90	>50	10.56	50 (2")	3.5 (1/8")	6.5 (255 7/8")	833.76.389	833.76.390	-




Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Maximum wattage-dependent strip length on the driver, see pages 144–145.



> 3.5 A/20 AWG lead,
for 8 mm (5/16") multi-white LED strip light

> For silicone multi-white strip lights, use
833.95.708 or 833.93.743

Voltage	Length	Item No.
5 12 V	100 (4")	833.93.742
	2000 (78 3/4")	833.95.702
5 24 V	100 (4")	833.93.743
	2000 (78 3/4")	833.95.708



> 3.5 A/20 AWG interconnecting lead,
for 8 mm (5/16") multi-white LED strip light

Length	Item No.
50 (2")	833.89.197
500 (19 11/16")	833.89.198
2000 (78 3/4")	833.89.199



> 3.5 A Clip connector,
for 8 mm (5/16") multi-white LED strip light

> Supplied with: 10 pcs.

Item No.
833.89.208



> 3.5 A Corner connector, 90° rigid,
left or right, for 8 mm (5/16") multi-white
LED strip light

> Supplied with: 10 pcs.

Item No.
833.89.188


*See page 158 for conversion chart.

Leads

For LED strip light multi-white, 8 mm (5/16")



Häfele Loox5 lead - for LED strip light multi-white, 8 mm (5/16")

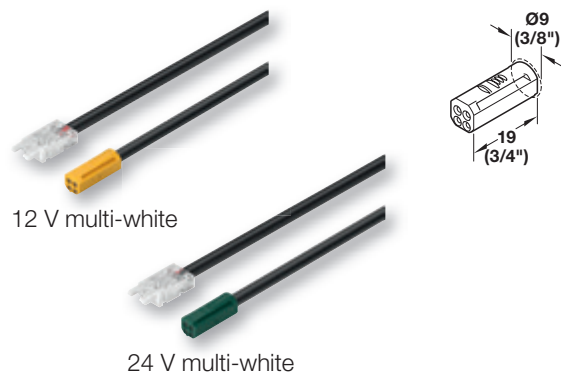

- > Current carrying capacity: Max. 3.5 A
- > Type of cable: 3-wire 20 AWG
- > Width: Clip 10 mm (3/8")
- > Drill hole Ø: Plug 9 mm (3/8")
- > Length: 2000 mm (78 3/4")
- > Supplied with: 1 lead plug/clip

Voltage	Item No.
5 12 V	833.95.702
5 24 V	833.95.708


Häfele Loox5 interconnecting lead - for LED strip light multi-white, 8 mm (5/16")



- > Current carrying capacity: Max. 3.5 A
- > Type of cable: 3-wire 20 AWG
- > Width: Clip 10 mm (3/8")
- > Drill hole Ø: Clip 12 mm (1/2")
- > Supplied with: 1 lead clip/clip

Length	Item No.
50 (2")	833.89.197
500 (19 11/16")	833.89.198
2000 (78 3/4")	833.89.199

Häfele Loox5 clip connector - for LED strip light multi-white, 8 mm (5/16")

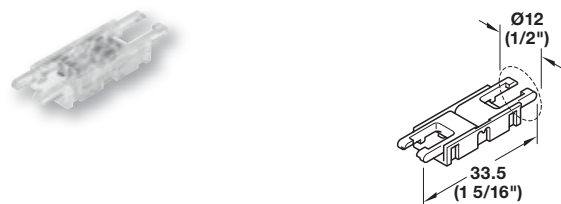

- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 10 mm (3/8")
- > Drill hole Ø: Clip 12 mm (1/2")
- > Length: 33.5 mm (1 5/16")
- > Supplied with: 10 pcs.

Item No.
833.89.208

Häfele Loox5 corner connector - for LED strip light multi-white, 8 mm (5/16")



- > Current carrying capacity: Max. 3.5 A
- > L x W: 24 x 24 mm (15/16" x 15/16")
- > Supplied with: 10 pcs.

Item No.
833.89.188