

# LED strip lights


RGB, 10 mm (3/8")

Häfele Loox5 LED 2080/3080

| Voltage                 | Number of       | Color       | Wattage | Luminous | Luminous | Weighted  | Section  | Length of  | Max. strip     | Delivery          |
|-------------------------|-----------------|-------------|---------|----------|----------|-----------|----------|------------|----------------|-------------------|
| V                       | LEDs/m          | temperature | W/m     | flux     | efficacy | energy    | length C | contact    | length         | length            |
|                         |                 | K           |         | lm/m     | lm/W     | consumpt. |          | surface P  | (visual)       | 5 m               |
|                         |                 |             |         |          |          | kWh/      |          |            |                | (196 7/8")        |
|                         |                 |             |         |          |          | 1000 h    |          |            |                |                   |
| <b>5<sup>12</sup> V</b> | <b>LED 2080</b> |             | *       | *        |          |           |          |            |                |                   |
|                         | 120             | RGB         | 9.6     | 530      | 51       | 10.78     | 25 (1")  | 3.8 (1/8") | 3.0 (118 1/8") | <b>833.74.380</b> |
| <b>5<sup>24</sup> V</b> | <b>LED 3080</b> |             |         |          |          |           |          |            |                |                   |
|                         | 120             | RGB         | 9.6     | 530      | 51       | 10.78     | 50 (2")  | 3.8 (1/8") | 6.5 (255 7/8") | <b>833.76.386</b> |




Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.  
Maximum wattage-dependent strip length on the driver, see pages 144–145.



> 3.5 A/20 AWG lead,  
for 10 mm (3/8") LED RGB strip light

| Voltage                 | Length         | Item No.          |
|-------------------------|----------------|-------------------|
| <b>5<sup>12</sup> V</b> | 100 (4")       | <b>833.93.713</b> |
|                         | 2000 (78 3/4") | <b>833.95.704</b> |
| <b>5<sup>24</sup> V</b> | 100 (4")       | <b>833.75.749</b> |
|                         | 2000 (78 3/4") | <b>833.95.710</b> |



> 3.5 A/20 AWG interconnecting lead,  
for 10 mm (3/8") LED RGB strip light


| Length          | Item No.          |
|-----------------|-------------------|
| 50 (2")         | <b>833.89.200</b> |
| 500 (19 11/16") | <b>833.89.201</b> |
| 2000 (78 3/4")  | <b>833.89.202</b> |



> 3.5 A Clip connector,  
for 10 mm (3/8") LED RGB strip light

> Supplied with: 10 pcs.

| Item No.          |
|-------------------|
| <b>833.89.209</b> |



> 3.5 A Corner connector, 90° rigid,  
left or right, for 10 mm (3/8") LED RGB strip  
light

> Supplied with: 10 pcs.

| Item No.          |
|-------------------|
| <b>833.89.189</b> |

\*See page 158 for conversion chart.

# Leads

For LED strip light RGB, 10 mm (3/8")



ILLUMINATING



EXTENDING



SWITCHING



NETWORKING




DISTRIBUTING



SUPPLYING



## Häfele Loox5 lead - for LED strip light RGB, 10 mm (3/8")

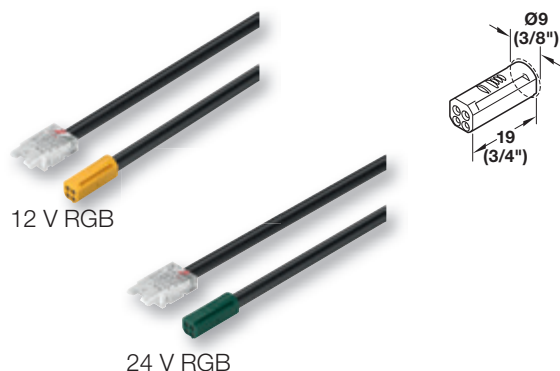

- > Current carrying capacity: Max. 3.5 A
- > Type of cable: 4-wire 20 AWG
- > Width: Clip 12 mm (1/2")
- > Drill hole Ø: Plug 9 mm (3/8")
- > Length: 2000 mm (78 3/4")
- > Supplied with: 1 lead plug/clip

| Voltage | Item No.   |
|---------|------------|
| 5 12 V  | 833.95.704 |
| 5 24 V  | 833.95.710 |

## Häfele Loox5 interconnecting lead - for LED strip light RGB, 10 mm (3/8")



- > Current carrying capacity: Max. 3.5 A
- > Type of cable: 4-wire 20 AWG
- > Width: Clip 12 mm (1/2")
- > Drill hole Ø: Clip 14 mm (9/16")
- > Supplied with: 1 lead clip/clip

| Length          | Item No.   |
|-----------------|------------|
| 50 (2")         | 833.89.200 |
| 500 (19 11/16") | 833.89.201 |
| 2000 (78 3/4")  | 833.89.202 |

## Häfele Loox5 clip connector - for LED strip light RGB, 10 mm (3/8")



- > Current carrying capacity: Max. 3.5 A
- > Width: Clip 12 mm (1/2")
- > Drill hole Ø: Clip 14 mm (9/16")
- > Length: 33.5 mm (1 5/16")
- > Supplied with: 10 pcs.

| Item No.   |
|------------|
| 833.89.209 |

## Häfele Loox5 corner connector - for LED strip light RGB, 10 mm (3/8")



- > Current carrying capacity: Max. 3.5 A
- > L x W: 26 x 26 mm (1" x 1")
- > Supplied with: 10 pcs.

| Item No.   |
|------------|
| 833.89.189 |