

Surface mounted light

Monochrome, length 300 mm (11 13/16")

ILLUMINATING

EXTENDING



SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING

Häfele Loox LED 2032

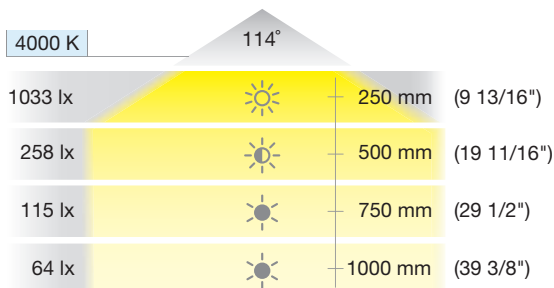

- > Dimmable: Yes
- > Material: Aluminum
- > L x W x H: 300 x 180 x 50 mm (11 13/16" x 7 1/16" x 2")
- > Energy efficiency class: A+
- > Degree of protection: IP44
- > Number of LEDs: 27
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2000 mm (78 3/4") lead, including fixing materials

Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.

Note
Loox lights and drivers are "Suitable for use within closet storage spaces"

Color temperature	Wattage	Luminous flux	Luminous efficacy	Color rendering index CRI	Weighted energy consumpt.	Finish	Item No.
K	W	lm	lm/W	R _a	kWh/1000 h		
4000	3	200	67	84	3.30	Silver colored	833.74.070
4000	3	200	67	84	3.30	Chrome-plated	833.74.080

Recess/surface mounted lights

Monochrome, drill hole Ø: 55 mm (2 3/16")



Häfele Loox LED 2047/3038



2700 K	3000 K	4000 K	5000 K	90°	
530 lx	660 lx	720 lx	800 lx		250 mm (9 13/16")
135 lx	180 lx	185 lx	220 lx		500 mm (19 11/16")
55 lx	80 lx	85 lx	95 lx		750 mm (29 1/2")
35 lx	40 lx	50 lx	55 lx		1000 mm (39 3/8")

LED 2047

3000 K	4000 K	5000 K	120°	
580 lx	590 lx	710 lx		250 mm (9 13/16")
220 lx	220 lx	265 lx		500 mm (19 11/16")
115 lx	115 lx	140 lx		750 mm (29 1/2")
75 lx	75 lx	100 lx		1000 mm (39 3/8")

LED 3038

- > Dimmable: Yes
- > Material: Steel
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: For mounting in drilled hole, for clamp or screw fixing
- > Drill hole Ø: 55 mm (2 3/16")
- > Supplied with: 1 light with 2000 mm (78 3/4") lead

12 V **5 12 V** Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.

24 V **5 24 V** Loox5 24 V driver see page 125
Please order 6-piece adapter set 833.77.838 separately, see page 116.

Note
Loox lights and drivers are "Suitable for use within closet storage spaces"

Recess/surface mounted lights

Monochrome, drill hole Ø: 55 mm (2 3/16")



Häfele Loox LED 2020



- > Dimmable: Yes
- > Material: Zinc Alloy
- > Energy efficiency class: A
- > Degree of protection: IP44 as recess mounted downlight
IP20 as surface mounted housing
- > Number of LEDs: 6
- > Mounting: For mounting in drilled hole,
for clamp fixing or for screw fixing
- > Drill hole Ø: 55 mm (2 3/16")
- > Supplied with: 1 light with 2000 mm (78 3/4") lead,
including fixing materials

3000 K	4000 K	5000 K		100°
760 lx	860 lx	840 lx		250 mm (9 13/16")
190 lx	215 lx	210 lx		500 mm (19 11/16")
85 lx	95 lx	95 lx		750 mm (29 1/2")
48 lx	50 lx	50 lx		1000 mm (39 3/8")



12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set
833.95.753 separately, see page 116.



The IP44 degree of protection is reduced to IP20 when surface mounting or recess mounting with through hole.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"

Voltage V	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI R _a	Weighted energy consumpt. kWh/1000 h	Black	Matt nickel-plated	Polished chrome-plated
12 V	3000	3.2	142	44	83	3.52	833.72.281	833.72.280	833.72.282
	4000	3.2	150	47	83	3.52	833.72.284	833.72.283	833.72.285
	5000	3.2	150	47	83	3.52	833.72.287	833.72.286	833.72.288

Recess/surface mounted lights

Monochrome, drill hole Ø: 26 mm (1")



Häfele Loox LED 2022



- > Dimmable: Yes
- > Material: Aluminum
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted light
IP20 as surface mounted light
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole, for clamp or screw fixing
- > Drill hole Ø: 26 mm (1")
- > Supplied with: 1 light with 2000 mm (78 3/4") lead

3000 K	4000 K	5000 K		90°	
650 lx	650 lx	650 lx			250 mm (9 13/16")
163 lx	163 lx	163 lx			500 mm (19 11/16")
72 lx	72 lx	72 lx			750 mm (29 1/2")
40 lx	40 lx	40 lx			1000 mm (39 3/8")



12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set
833.95.753 separately, see page 116.



The IP44 degree of protection is reduced to IP20 when surface mounting or recess mounting with through hole.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"



Voltage V	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI R _a	Weighted energy consumpt. kWh/1000 h	Silver colored anodized	Polished chrome-plated
12 V	3000	1.5	105	70	82	1.65	833.72.040	833.72.043
	4000	1.5	105	70	87	1.65	833.72.041	833.72.044
	5000	1.5	105	70	88	1.65	833.72.042	833.72.045

Recess/surface mounted lights

Monochrome, drill hole Ø: 26 mm (1")



Häfele Loox LED 2023

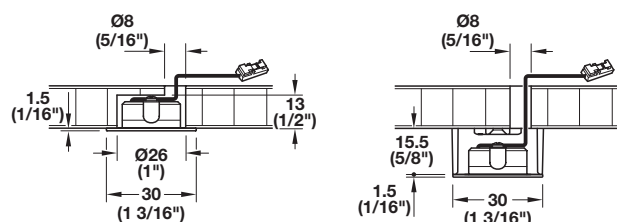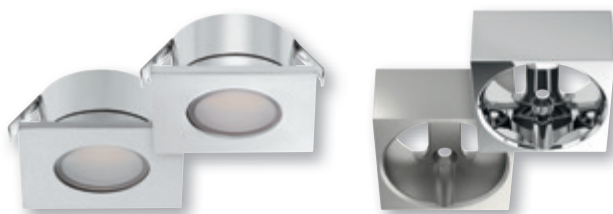

Recess mounting

Surface Mounting

3000 K	4000 K	5000 K		90°
650 lx	650 lx	650 lx		250 mm (9 13/16")
163 lx	163 lx	163 lx		500 mm (19 11/16")
72 lx	72 lx	72 lx		750 mm (29 1/2")
40 lx	40 lx	40 lx		1000 mm (39 3/8")

- > Dimmable: Yes
- > Material: Aluminum
- > L x W: 30 x 30 mm (1 3/16" x 1 3/16")
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted light
IP20 as surface mounted light
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole, for clamp fixing
- > Drill hole Ø: 26 mm (1")
- > Supplied with: 1 light with 2000 mm (78 3/4") lead



12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set
833.95.753 separately, see page 116.



The IP44 degree of protection is reduced to IP20 when surface mounting or recess mounting with through hole.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"



> Housing, square, Plastic


Color	Item No.
Silver colored	833.72.834
Chrome-plated	833.72.835

Voltage V	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI R _a	Weighted energy consumpt. kWh/1000 h	Silver colored anodized	Polished chrome-plated
12 V	3000	1.5	105	70	82	1.65	833.72.064	833.72.060
	4000	1.5	105	70	82	1.65	833.72.065	833.72.061
	5000	1.5	105	70	82	1.65	833.72.066	833.72.062

Recess mounted lights

Monochrome, drill hole Ø: 58 mm (2 5/16")


Häfele Loox LED 2039



- > Dimmable: Yes
- > Material: Zinc Alloy
- > Energy efficiency class: A
- > Degree of protection: IP65 after installation
- > Number of LEDs: 18
- > Mounting: For mounting in drilled hole, for clamp fixing
- > Drill hole Ø: 58 mm (2 5/16")
- > Supplied with: 1 light with 4000 mm (157 1/2") lead

 **12 V 5 12 V** Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.

 **Note**
Loox lights and drivers are "Suitable for use within closet storage spaces"

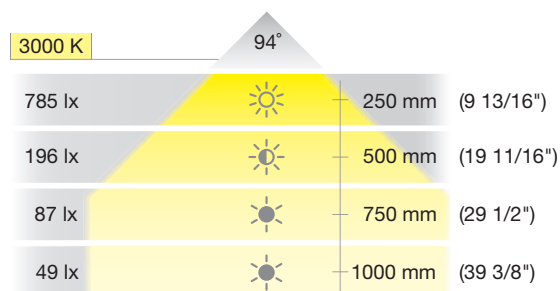


Voltage	Color temperature	Wattage	Luminous flux	Luminous efficacy	Color rendering index CRI	Weighted energy consumpt.	Matt nickel-plated	Chrome-plated
V	K	W	lm	lm/W	R _a	kWh/1000 h		
12 V	3000	2.5	125	50	85	2.75	833.72.091	833.72.092

Recess mounted lights


Monochrome, sensor-controlled, drill hole Ø: 40 mm (1 9/16")



Häfele Loox LED 2028 - with motion detector

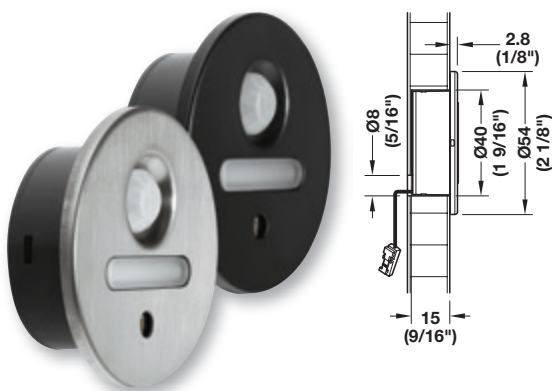

- > Not dimmable
- > Material: Stainless Steel, Plastic
- > Version: With motion detector active from ambient light less than 15 lx
- > Energy efficiency class: A+
- > Degree of protection: IP44
- > Delay time: approx. 2 min.
- > Sensor range: 0–3000 mm (0–9' 10 1/8")
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole
- > Drill hole Ø: 40 mm (1 9/16")
- > Supplied with: 1 light with 2000 mm (78 3/4") lead, fixing materials

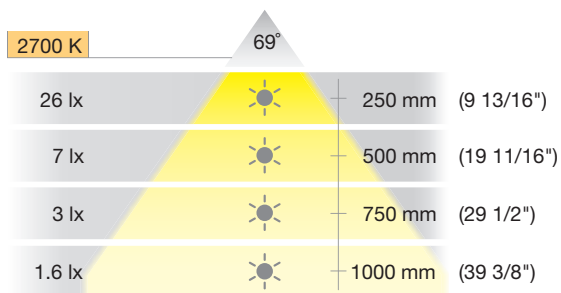

12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"


Voltage V	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI R _a	Weighted energy consumpt. kWh/1000 h	Black	Matt
12 V	2700	0.3	4	13	90	0.37	833.73.111	833.73.110

Surface mounted lights

Monochrome, Ø 65 mm (2 9/16")



Häfele Loox LED 2027



- > Dimmable: Yes
- > Material/Finish: Aluminum, silver colored, Plastic
- > Diameter: 65 mm (2 9/16")
- > Height: 9 mm (3/8")
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 27
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2000 mm (78 3/4") lead, fixing materials



12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"

3000 K	4000 K	5000 K		
867 lx	884 lx	918 lx	117°	250 mm (9 13/16")
216 lx	221 lx	229 lx		500 mm (19 11/16")
96 lx	98 lx	102 lx		750 mm (29 1/2")
54 lx	55 lx	57 lx		1000 mm (39 3/8")

Voltage V	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI R _a	Weighted energy consumpt. kWh/1000 h	Item No.
12 V	3000	2.6	190	73	85	2.86	833.72.050
	4000	2.6	208	80	85	2.86	833.72.051
	5000	2.6	218	84	85	2.86	833.72.052

Flexible surface mounted lights

Monochrome with USB

ILLUMINATING

EXTENDING


SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING

Häfele Loox LED 2034

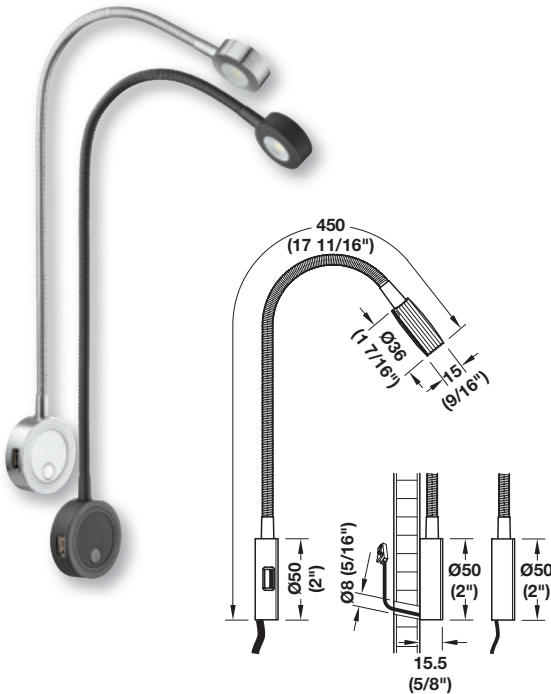

4000 K	90°		
650 lx		250 mm	(9 13/16")
163 lx		500 mm	(19 11/16")
72 lx		750 mm	(29 1/2")
40 lx		1000 mm	(39 3/8")

- > Dimmable: Yes
- > Version: Integrated twin USB charging station 5 V / 2 A, integrated push switch for 2 brightness levels
- > Material: Aluminum
- > L x W: 450 x 50 mm (17 11/16" x 2")
- > Height: 15.5 mm (5/8")
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 3
- > Color temperature: 4000 K (cool white)
- > Wattage: Max. 17 W (light: 1.5)
- > Luminous flux: 105 lm
- > Luminous efficacy: 70 (lm/W)
- > Mounting: For screw fixing under magnetic cover
- > Supplied with: 1 light with 2000 mm (78 3/4") lead, including fixing materials

12 V 5 12 V Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.
Min. 20 W driver per light for optimum operation of the USB charging station.

Note
Loox lights and drivers are "Suitable for use within closet storage spaces"


Voltage	Color rendering index CRI	Weighted energy consumpt.	Finish	Item No.
V	R _a	kWh/1000 h		
12 V	82	1.65	Black	833.74.097
			Chrome-plated	833.74.096

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Flexible surface mounted lights

Monochrome

Häfele Loox LED 2018

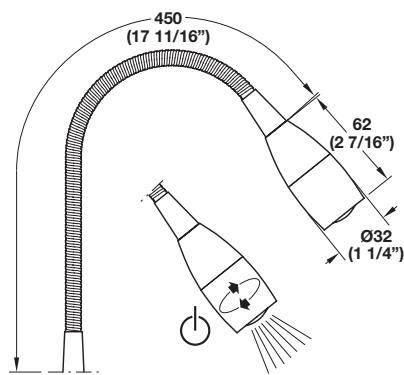

Surface mounted


Recess mounted



Surface mounted



Recess mounted

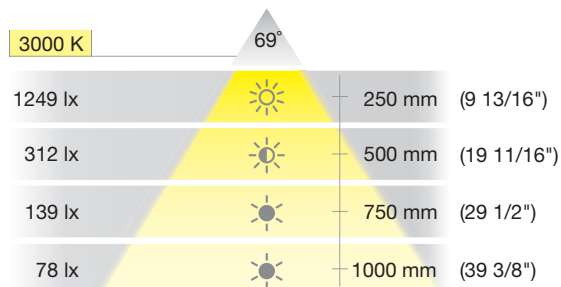

- > Not dimmable
- > Version: With integrated rotary switch on light head
- > Material/Finish: Aluminum, silver colored anodized
- > Diameter: 32 mm (1 1/4")
- > Energy efficiency class: A
- > Degree of protection: IP20
- > Number of LEDs: 1
- > Color temperature: 3000 K
- > Wattage: 2 W
- > Luminous flux: 89 lm
- > Luminous efficacy: 45 lm/W
- > Mounting: Surface mounted or recess mounted
- > Drill hole Ø: 35 mm (1 3/8")
- > Supplied with: 1 LED light with 2000 mm (78 3/4") lead, fixing materials



12 V 5 12 V

Loox5 12 V driver see page 124

Please order 6-piece adapter set 833.95.753 separately, see page 116.

Voltage V	Color rendering index CRI R_a	Weighted energy consumpt. kWh/1000 h	Length mm	Installation	Item No.
12 V	81	2.20	545.5 (21 1/2")	Surface mounted	833.74.100
			526 (20 11/16")	Recessed	833.74.110



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"

Surface mounted lights

Monochrome, Ø 65 mm (2 9/16")

ILLUMINATING

EXTENDING


SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING

Häfele Loox LED 2050/3035



3000 K	4000 K	115°		
650 lx	700 lx		250 mm	(9 13/16")
165 lx	180 lx		500 mm	(19 11/16")
75 lx	80 lx		750 mm	(29 1/2")
40 lx	45 lx		1000 mm	(39 3/8")

- > Dimmable: Yes
- > Material/Color: Plastic, silver colored
- > Diameter: 65 mm (2 9/16")
- > Height: 6 mm (1/4")
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 8
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2000 mm (78 3/4") lead, including fixing materials

Note
Loox lights and drivers are "Suitable for use within closet storage spaces"

12 V **5 12 V** Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.

24 V **5 24 V** Loox5 24 V driver see page 125
Please order 6-piece adapter set 833.77.838 separately, see page 116.

Voltage V	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI R _a	Weighted energy consumpt. kWh/1000 h	Item No.
Häfele Loox LED 2050							
12 V	3000	2.5	170	68	90	2.75	833.74.040
	4000	2.5	180	72	90	2.75	833.74.041
Häfele Loox LED 3035							
24 V	3000	2.5	170	68	90	2.75	833.77.190
	4000	2.5	180	72	90	2.75	833.77.191



Surface mounted lights


Monochrome, 65 x 65 mm (2 9/16" x 2 9/16")



Häfele Loox LED 2051/3036



EXTRA
SLIM
6 mm
(1/4")

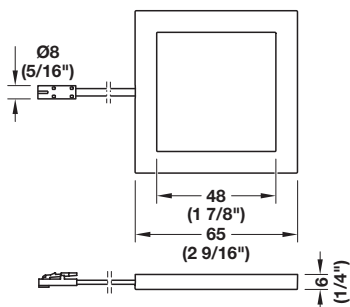

3000 K	4000 K	115°		
750 lx	800 lx		250 mm	(9 13/16")
190 lx	210 lx		500 mm	(19 11/16")
85 lx	90 lx		750 mm	(29 1/2")
50 lx	50 lx		1000 mm	(39 3/8")

- > Dimmable: Yes
- > Material/Color: Plastic, silver colored
- > L x W: 65 x 65 mm (2 9/16" x 2 9/16")
- > Height: 6 mm (1/4")
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Number of LEDs: 8
- > Mounting: For screw fixing
- > Supplied with: 1 light with 2000 mm (78 3/4") lead, fixing materials



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"



12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.

24 V 5 24 V

Loox5 24 V driver see page 125
Please order 6-piece adapter set 833.77.838 separately, see page 116.


Voltage V	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI R _a	Weighted energy consumpt. kWh/1000 h	Item No.
Häfele Loox LED 2051							
12 V	3000	2.5	190	76	90	2.75	833.74.030
	4000	2.5	200	80	90	2.75	833.74.031
Häfele Loox LED 3036							
24 V	3000	2.5	190	76	90	2.75	833.77.180
	4000	2.5	200	80	90	2.75	833.77.181

Elite wardrobe tube profiles



Aluminum




Häfele Loox LED 2037

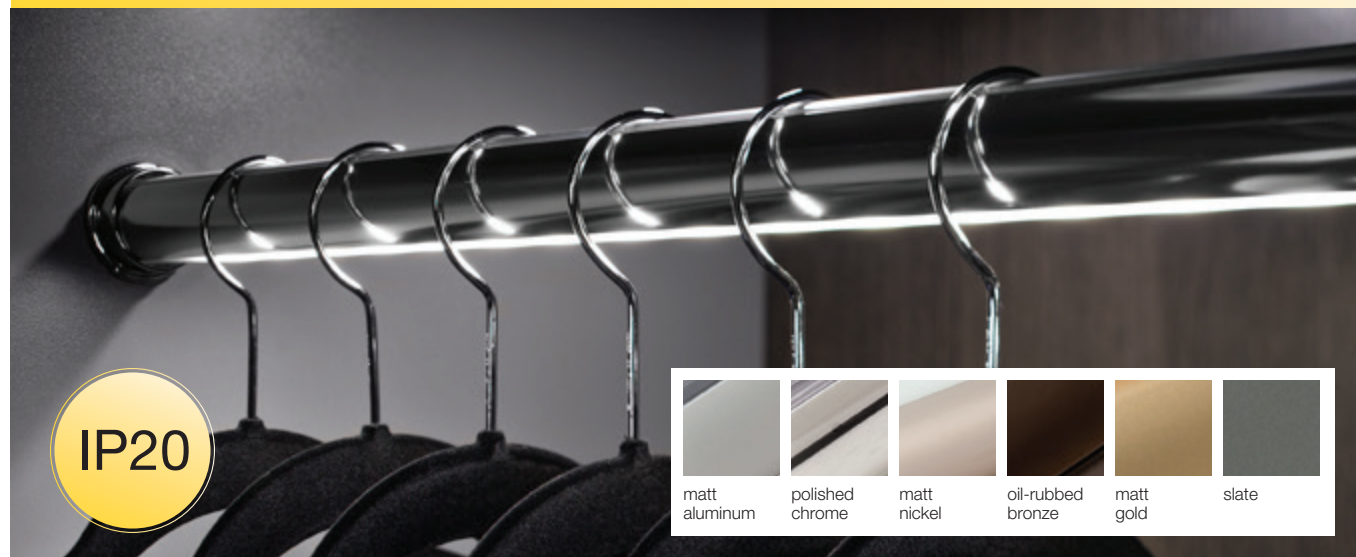

IP20

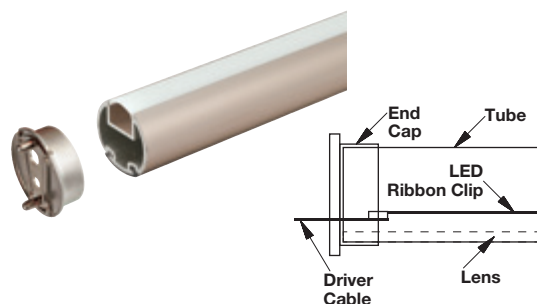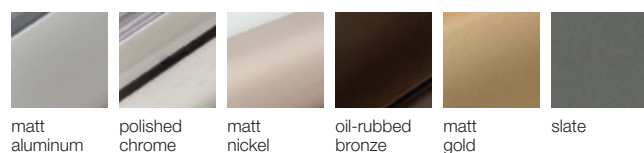

- > CRI 90 lights are Title 24 compliant
- > CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > A great way to brighten up your closet space
- > 2 color temperatures available
- > 6 finishes to choose from
- > Comes ready to install
- > Tube is cut 6 mm (1/4") shorter than nominal size to allow room for end caps and driver cable exit
- > Degree of protection: IP20

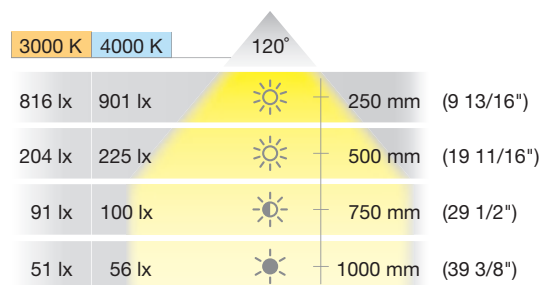

Note

Position cable around and out of tube between lens and end cap or through end cap exit hole.
Loox lights and drivers are "Suitable for use within closet storage spaces"



12 V 5 12 V


Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.

Matt aluminum	833.71.032	833.71.033	833.71.034	833.71.035	833.71.024	833.71.025	833.71.026	833.71.027
Polished chrome	833.71.064	833.71.065	833.71.066	833.71.067	833.71.056	833.71.057	833.71.058	833.71.059
Matt nickel	830.28.780	830.28.781	830.28.782	830.28.783	830.28.785	830.28.786	830.28.787	830.28.788
Oil-rubbed bronze	833.71.048	833.71.049	833.71.050	833.71.051	833.71.040	833.71.041	833.71.042	833.71.043
Matt gold	833.71.916	833.71.917	833.71.918	833.71.919	833.71.912	833.71.913	833.71.914	833.71.915
Slate	830.28.810	830.28.811	830.28.812	830.28.813	830.28.814	830.28.815	830.28.816	830.28.817
Light Color (K)	3000 (warm white)				4000 (cool white)			
Length	457 (18")	610 (24")	762 (30")	915 (36")	457 (18")	610 (24")	762 (30")	915 (36")
Wattage	1.8	2.4	3.1	3.7	1.8	2.4	3.1	3.7
Lumen	146	195	243	292	146	195	243	292
CRI	90*							
Material	Aluminum							
Supplied with	Tube, lens, Loox 2037 flexible strip light, 2000 mm (78 3/4") driver cable, 2 end caps							

Surface mounted strip lights

With inline dimmer switch

Häfele Loox LED 2029

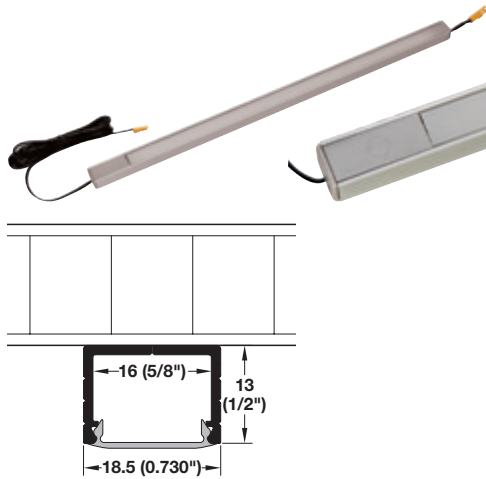

- > CRI 90 lights are Title 24 compliant
- > CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Life time: 30,000 hours
- > Supplied ready to install
- > Optimal lengths for installing under your wall cabinets to brighten up your countertop workspace
- > Linkable to other light bars refer to page 74



12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"

3000 K 4000 K 120°


2090 lx	2215 lx		250 mm	(9 13/16")
522 lx	554 lx		500 mm	(19 11/16")
232 lx	246 lx		750 mm	(29 1/2")
130 lx	138 lx		1000 mm	(39 3/8")

Light Color (K)	3000 (warm white)				4000 (cool white)			
Lumen per watt	85							
CRI	90*							
Item No.	833.73.530	833.73.532	833.71.213	833.73.534	833.73.550	833.73.552	833.71.218	833.73.554
Length	152 (6")	229 (9")	305 (12")	381 (15")	152 (6")	229 (9")	305 (12")	381 (15")
Wattage	0.7	1.5	2.4	2.9	0.7	1.5	2.4	2.9
LEDs	9	18	27	36	9	18	27	36
Lumen	62	124	186	249	62	124	186	249
Item No.	833.73.536	833.73.538	833.71.214	833.73.540	833.73.556	833.73.558	833.71.219	833.73.562
Length	457 (18")	533 (21")	610 (24")	686 (27")	457 (18")	533 (21")	610 (24")	686 (27")
Wattage	3.7	4.4	5.4	5.9	3.7	4.4	5.4	5.9
LEDs	45	54	63	72	45	54	63	72
Lumen	311	373	435	497	311	373	435	497
Item No.	833.71.215	833.73.542	833.71.216	833.73.544	833.71.220	833.73.564	833.71.221	833.73.566
Length	762 (30")	832 (33")	915 (36")	991 (39")	762 (30")	832 (33")	915 (36")	991 (39")
Wattage	6.8	7.3	8.3	8.8	6.8	7.3	8.3	8.8
LEDs	81	90	99	108	81	90	99	108
Lumen	559	622	683	746	559	622	683	746
Item No.	833.71.217		833.73.546		833.71.222		833.73.568	
Length	1067 (42")		1143 (45")		1067 (42")		1143 (45")	
Wattage	9.7		10.2		9.7		10.2	
LEDs	117		126		117		126	
Lumen	807		870		807		870	
Material	Aluminum, clear anodized; Lens: milk							
Supplied with	2000 mm (78 3/4") driver connection cable with integrated switch, 100 mm (4") female mini driver cable, mounting brackets, screws, two-sided mounting tape							

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Surface mounted drawer lights

Häfele Loox LED 2037



- > CRI 90 lights are Title 24 compliant
- > CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Life time: 30,000 hours
- > Supplied ready to install
- > Optimal lengths for installing behind face frames in drawer applications



12 V 5 12 V

Loox5 12 V driver see page 124
Please order 6-piece adapter set 833.95.753 separately, see page 116.



Note

Loox lights and drivers are "Suitable for use within closet storage spaces"



> Optional brackets for frameless cabinet mounting

Version

Light bar clip
Surface mount clip

Item No.

260.26.932
260.26.934

3000 K	4000 K	120°		
816 lx	901 lx		250 mm	(9 13/16")
204 lx	225 lx		500 mm	(19 11/16")
91 lx	100 lx		750 mm	(29 1/2")
51 lx	56 lx		1000 mm	(39 3/8")


Light Color (K)	4000 (cool white)			3000 (warm white)		
Lumen per watt	85			80		
CRI	90*			90*		
Item No.	833.71.310	833.71.311	833.71.312	833.71.320	833.71.321	833.71.322
Length	229 (9")	305 (12")	381 (15")	229 (9")	305 (12")	381 (15")
Wattage	0.8	1.1	1.4	0.8	1.1	1.4
LEDs	24	33	42	24	33	42
Lumen	68	94	119	64	88	112
Item No.	833.71.313	833.71.314	833.71.315	833.71.323	833.71.324	833.71.325
Length	457 (18")	533 (21")	610 (24")	457 (18")	533 (21")	610 (24")
Wattage	1.7	2.0	2.3	1.7	2.0	2.3
LEDs	51	60	69	51	60	69
Lumen	145	170	196	136	160	184
Item No.	833.71.316	833.71.317	833.71.318	833.71.326	833.71.327	833.71.328
Length	686 (27")	762 (30")	832 (33")	686 (27")	762 (30")	832 (33")
Wattage	2.6	2.9	3.2	2.6	2.9	3.2
LEDs	78	87	96	78	87	96
Lumen	221	247	272	208	232	256
Item No.	833.71.319			833.71.329		
Length	915 (36")			915 (36")		
Wattage	3.5			3.5		
LEDs	105			105		
Lumen	298			280		
Material	Aluminum, clear anodized; Lens: milk					
Supplied with	50 mm (2") male mini driver cable, mounting brackets					

Surface mounted drawer light

With IR sensor



Häfele Loox LED 2037



3000 K	4000 K	120°		
816 lx	901 lx		250 mm	(9 13/16")
204 lx	225 lx		500 mm	(19 11/16")
91 lx	100 lx		750 mm	(29 1/2")
51 lx	56 lx		1000 mm	(39 3/8")

- > CRI 90 lights are Title 24 Compliant
- > CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Lifetime: 30,000 hours
- > Supplied ready to install
- > Optimal lengths for installing behind face frames and in frameless cabinets for drawer applications (brackets required)
- > W x H: 18 x 12.5 mm (3/4" x 1/2")



12 V 5 12 V

Loox5 12 V driver see page 124

Please order 6-piece adapter set 833.95.753 separately, see page 116.



Note

Loox lights and drivers are "suitable for use within closet storage spaces"



Drawer light bar clip

- > Optional brackets for frameless cabinet mounting

Item No.

260.26.933

Light Color (K)	4000 (cool white)			3000 (warm white)		
Lumen per watt	85			80		
CRI	90*			90*		
Item No.	833.73.811	833.73.608	833.73.600	833.73.810	833.73.609	833.73.604
Length	250 (10")	330 (13")	406 (16")	250 (10")	330 (13")	406 (16")
Wattage	0.73	1.03	1.33	0.73	1.03	1.33
LEDs	21	30	39	21	30	39
Lumen	60	85	111	56	80	104
Item No.	833.73.601	833.73.602	833.73.603	833.73.605	833.73.606	833.73.607
Length	559 (22")	711 (28")	864 (34")	559 (22")	711 (28")	864 (34")
Wattage	1.93	2.53	3.13	1.93	2.53	3.13
LEDs	60	75	96	60	75	96
Lumen	170	213	272	160	200	256
Material	Aluminum, clear anodized; Lens: milk					
Supplied with	2000 mm (78 3/8") cable, mounting brackets					