

Recess/surface mounted lights

Multi-white, drill hole Ø: 55 mm (2 3/16")



Häfele Loox LED 2048/3039



2700 K	5000 K	120°		
290 lx	345 lx			250 mm (9 13/16")
110 lx	130 lx			500 mm (19 11/16")
60 lx	70 lx			750 mm (29 1/2")
40 lx	45 lx			1000 mm (39 3/8")

LED 2048

2700 K	5000 K	120°		
335 lx	350 lx			250 mm (9 13/16")
125 lx	130 lx			500 mm (19 11/16")
70 lx	70 lx			750 mm (29 1/2")
45 lx	45 lx			1000 mm (39 3/8")

LED 3039

- > Material: Steel
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: For mounting in drilled hole, for clamp or screw fixing
- > Drill hole Ø: 55 mm (2 3/16")
- > Supplied with: 1 light with 2000 mm (78 3/4") multi-white lead

12 V **5 12 V** 12V Multi-white BLE adapter 850.00.011

24 V **5 24 V** 24V Multi-white BLE adapter 850.00.012

5 12 V Häfele Connect Mesh 6-way distributor, see page 95.

5 24 V Häfele Connect Mesh 6-way distributor, see page 95.

Color control via Häfele Connect Mesh 6-way distributor with multi-white BLE adapter and remote control or Häfele Connect Mesh app.

Drivers for multi-white solutions


5 12 V Loox5 12 V driver see page 124.

5 24 V Loox5 24 V driver see page 125.

Adapters



Häfele Loox5 multi-white adapter - for Häfele Connect Mesh 6-way distributor




- > Area of application: For connecting multi-white lights to the Häfele Connect Mesh 6-way distributor
- > Material/Color: Plastic, black
- > L x W x H: 70 x 30 x 14 mm (2 3/4" x 1 3/16" x 9/16")
- > Number of connections: 2x input port with plug, monochrome
6x output ports device sockets, multi-white
- > Supplied with: 1 distributor with 80 mm (3 1/8") lead

Voltage	Max. connected wattage W	Item No.
5 12V	60	833.95.745
5 24V	90	833.77.830

! 1 multi-white adapter occupies 2 output ports at the 6-way distributor.



Häfele Loox5 RGB adapter - for Häfele Connect Mesh 6-way distributor




- > Area of application: For connecting RGB lights to the Häfele Connect Mesh 6-way distributor
- > Material/Color: Plastic, black
- > L x W x H: 70 x 30 x 14 mm (2 3/4" x 1 3/16" x 9/16")
- > Number of connections: 3x input ports with plug, monochrome
6x output ports for device sockets, RGB
- > Supplied with: 1 distributor with 80 mm (3 1/8") lead

Voltage	Max. connected wattage W	Item No.
5 12V	60	833.95.746
5 24V	90	833.77.831

! 1 RGB adapter occupies 3 output ports at the 6-way distributor.

Multi-white adapter - for 2048 & 3039 puck lights




- > Area of application: For connecting 2048 & 3039 multi-white puck leads to the Häfele Connect Mesh 6-way distributor
- > Material/Color: Plastic, white
- > L x W x H: 100 x 57 x 17 mm (4" x 2 1/4" x 11/16")
- > Number of connections: 2x input port with Loox plug, 9x output ports, multi-white
- > Supplied with: 1 adapter

Voltage	Max. connected wattage W	Item No.
12V	42	850.00.011
24V	84	850.00.012

! To connect multi-white adapter leads to Connect Mesh 6-way distributor, please order 12V or 24V Loox>Loox5 adapter set separately, see page 116.

BLE Box

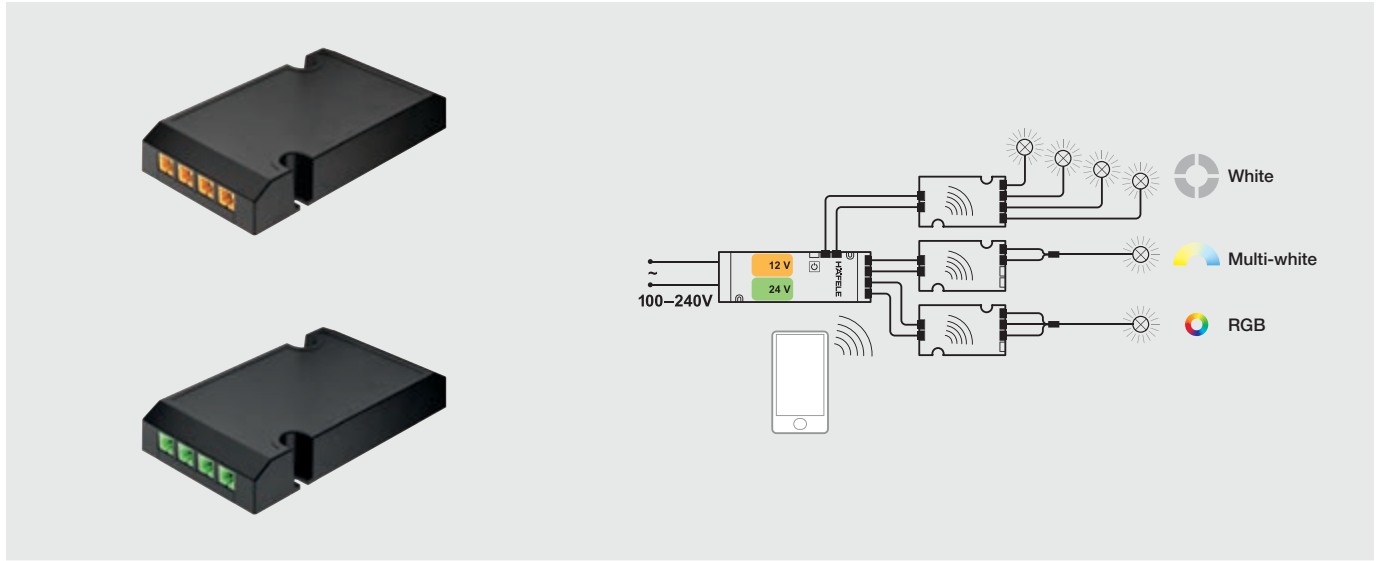

- > The distance between the Smartphone or tablet to the nearest BLE box is approx. 10 m (32' 9 3/4")
- > Multiple BLE boxes create a network, and can also be placed approx. 10 m (32' 9 3/4") apart
- > One BLE box occupies 2 outputs of the driver



BLE adapter for 4-channel BLE box

12 V

- > Multi-white, Item No. 850.00.011 **SRP \$ 10.00**
- > RGB, Item No. 850.00.013 **SRP \$10.00**

24 V

- > Multi-white, Item No. 850.00.012 **SRP \$10.00**

