






Motion detector



Häfele Connect Mesh motion detector - battery powered

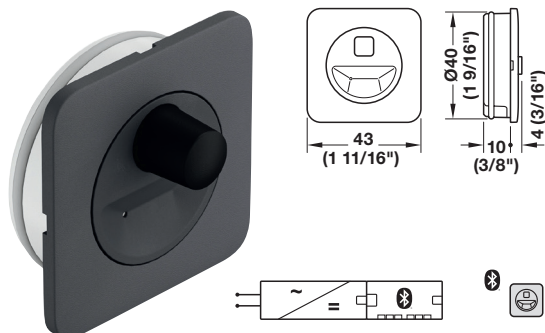

Surface mount housing

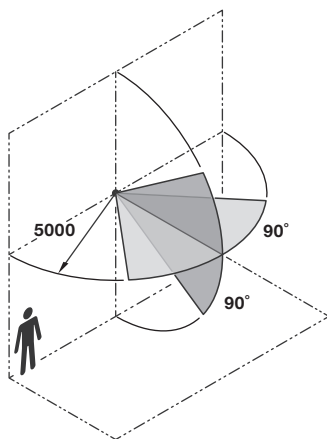

Detection Range

Sensor range 5,000 mm (196 7/8") with temperature difference of 39° F between environment and moving object. Range up to 7,000 mm (275 9/16") with difference of 46° F.

Use Connect Mesh App to customize:

- > Run-time
- > Brightness threshold
- > Soft-off settings

- > Area of application: For controlling components of a Häfele Connect Mesh network
- > Version: Battery powered
- > Configuration: Use the Häfele Connect Mesh app to pair the switch to a group of lights and to customize settings for run time, brightness threshold and soft-off settings
- > Sensor range: 5 m (approximately 16 ft.)
- > Sensor angle: 90 degrees horizontal; 90 degrees vertical
- > Battery service life: >1 year
- > Mounting: Recess in drilled hole or surface mount with supplied switch housing
- > Drill hole Ø: 40 mm (1 5/8")
- > Material: Plastic
- > Color: Black
- > Dimensions: Switch (L x W): 43 x 43 mm (1 11/16" x 1 11/16")
Housing (L x W x H): 47 x 47 x 15 mm (1 7/8" x 1 7/8" x 9/16")
- > Supplied with: 1 motion detector switch
1 surface mount housing
1 CR3032 battery

Item No.
850.00.953



Motion detector can only control lights that are connected to a Häfele Connect Mesh network. Please order Häfele Connect Mesh distributor separately.

FC IP20