


Flush Bolts

- > For wood doors
- > Typically recessed into edge of door
- > Recommended door thickness: min. 35 mm (1 3/8")

→ Slide Action Flush Bolt

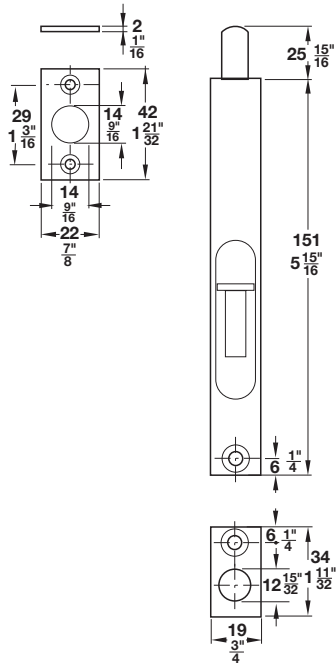

- > Throw: 25 mm (15/16")
- > Length: 151 mm (5 15/16")
- > Material: Stainless Steel

Finish

matt
PVD brass polished


Item No.

911.62.335
911.62.339

Supplied With

Strike plate
Mounting screws

→ Lever Action Flush Bolt

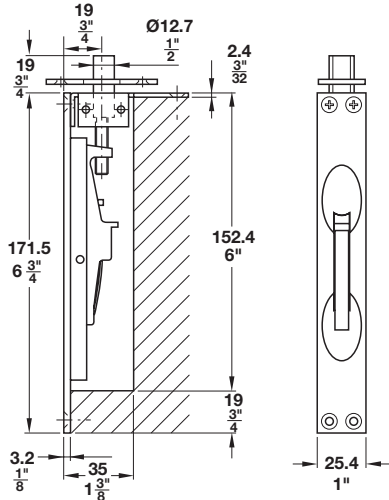

- > Recessed into edge of door at top and/or bottom
- > Throw: 19 mm (3/4")

Material/Finish

Brass, polished (US 3)
Bronze, oil-rubbed (US 10B)
Brass, nickel-plated, matt (US 15)

Item No.

911.62.440
911.62.441
911.62.442

Supplied With

Lever action flush bolt
Strike plate
Mounting screws



Brass, polished



Bronze, oil-rubbed



Brass,
nickel-plated
matt

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.