


TECTUS

→ Routing Template



- > For milling of TECTUS hinges
- > Router bit Ø: 12.7 mm (1/2") for TE 240
 19 mm (3/4") for all other models
- > Collar ring Ø: 25.4 mm (1")


→ Universal Routing Frame - TECTUS



> Used to hold the routing templates in place during the milling process

Version	Item No.
1 frame	924.02.191
2 frames with connecting bar	924.02.331
3 frames with connecting bar	924.02.332

→ TE 527/527 3D Drilling Jig

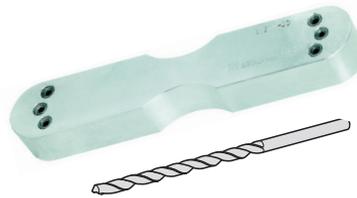

> For drilling the mounting holes

Item No.
924.02.330

Supplied With
 Drilling jig, drill bit Ø3 mm

Suitable for	Jig for milling hinge into	Item No.
TE 240 3D	door	922.15.662
	jamb	922.15.661
TE 340 3D	door and jamb, part 1	922.15.663
	door and jamb, part 2	922.15.664
TE 526 3D	door and jamb	922.15.670
TE 527 3D	door and jamb	922.15.665
TE 540 3D and TE 540 3D A8	door and jamb, part 1	922.15.666
	door and jamb, part 2	922.15.668
TE 541 3D FVZ	door and jamb, part 1	922.15.678
	door and jamb, part 2	922.15.669
	door, part 3	922.15.669
TE 640 3D and TE 640 3D A8	door and jamb, part 1	922.15.671
	door and jamb, part 2	922.15.672
	jamb, part 1	922.15.674
TE 645 3D	jamb, part 2	922.15.675
	door, part 1	922.15.676
	door, part 2	922.15.677

→ Finish Sample Chart



Item No.
732.06.949

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.