

## HAWA Junior 40/GS



### Set

- For 1 sliding door without upper track and lower guide channel

| Item No.   |
|------------|
| 940.41.010 |

**Supplied With**  
Mounting instructions



### Set Components

|                                                                                                     | Description                                            | Material | Finish | Qty.   | Item No.   |
|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------|----------|--------|--------|------------|
|                    | Double roller running gear                             | –        | –      | 2 pcs. | 940.41.100 |
|                    | Suspension bolt, M8                                    | –        | –      | 2 pcs. | 941.00.071 |
|                                                                                                     | Clamp shoe, adjustable from 6 – 12.7 mm (1/4" – 1/2")  | Aluminum | –      |        | 941.00.020 |
|                    | Track stopper                                          | –        | –      | 2 pcs. | 940.40.041 |
|  | Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2") | –        | –      | 1 pc.  | 941.00.031 |
|                    | Wall buffer                                            | Rubber   | black  | 1 pc.  | 407.01.930 |

### Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.



### Individual Components

|                                                                                                             | Description                                           | Material | Finish          | Length             | Item No.   |
|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------|-----------------|--------------------|------------|
|                          | Upper track, pre-drilled                              | Aluminum | anodized, clear | 1.4 m (4' 7 1/8")  | 940.40.140 |
|                                                                                                             |                                                       |          |                 | 1.6 m (5' 3")      | 940.40.160 |
|                                                                                                             |                                                       |          |                 | 1.8 m (5' 10 7/8") | 940.40.180 |
|                                                                                                             |                                                       |          |                 | 2 m (6' 6 3/4")    | 940.40.200 |
|                                                                                                             |                                                       |          |                 | 3 m (9' 10 1/8")   | 940.40.300 |
|                                                                                                             |                                                       |          |                 | 4 m (13' 1 1/2")   | 940.40.400 |
|                                                                                                             | 6 m (19' 8 1/4")                                      |          |                 |                    | 940.40.600 |
|  | Glider, self adhesive, for 8 mm (5/16") thick glass   | Plastic  | –               | –                  | 940.40.033 |
|  | Glider, self adhesive, for 10 mm (13/32") thick glass | Plastic  | –               | –                  | 940.40.034 |
|                          | Lower guide channel, 20 x 20 mm (25/32" x 25/32")     | Aluminum | anodized        | 2.5 m (8' 2 7/16") | 941.00.925 |
|                                                                                                             | Lower guide channel, 20 x 20 mm (25/32" x 25/32")     |          |                 | 6 m (19' 8 1/4")   | 941.00.960 |

|                                            |                   |
|--------------------------------------------|-------------------|
| Angle profile                              | page 1.288        |
| Toplock                                    | pages 1.352-1.356 |
| Lower guide channel                        | page 1.290        |
| Clip-on fascias and end caps to clamp shoe | page 1.219        |
| Floor mounted door stop                    | page 1.290        |
| Glass edge protection seals                | page 1.290        |

## HAWA Junior 40/GP

### Individual Components

|                                                                                     | Description                                                                          | Material | Finish             | Length               | Item No.   |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------|--------------------|----------------------|------------|
| <b>Installation option 1</b>                                                        |                                                                                      |          |                    |                      |            |
|    | Patch suspension                                                                     | –        | –                  | –                    | 940.40.038 |
|    | Lower guide, spring loaded, for single guide track                                   | –        | –                  | –                    | 940.40.039 |
|    | Single lower guide track for clip or glue mounting                                   | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 940.41.725 |
|                                                                                     |                                                                                      |          |                    | 3.5 m (11' 5 13/16") | 940.41.735 |
|    | Fixing set, for single lower guide track. 5 pcs. each, 2 pcs. per meter required     | Plastic  | black              | –                    | 404.97.990 |
| <b>Installation option 2</b>                                                        |                                                                                      |          |                    |                      |            |
|    | Patch suspension                                                                     | –        | –                  | –                    | 940.40.038 |
|    | Lower guide with mounting screws, suitable for patch suspension unit                 | –        | –                  | –                    | 940.40.035 |
|    | Lower guide channel, 24 x 24 mm (15/16" x 15/16"), not drilled                       | Aluminum | anodized           | 6 m (19' 8 1/4")     | 940.81.600 |
|   | End stop for lower guide channel 24 x 24 mm (15/16" x 15/16")                        | Aluminum | anodized           | –                    | 940.80.051 |
| <b>Installation option 3</b>                                                        |                                                                                      |          |                    |                      |            |
|  | Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2") | Steel    | chrome-plated matt | –                    | 940.40.032 |
| <b>Installation option 4</b>                                                        |                                                                                      |          |                    |                      |            |
|  | Lower guide channel, 20 x 20 mm (25/32" x 25/32")                                    | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 941.00.925 |
|                                                                                     | Lower guide channel, 20 x 20 mm (25/32" x 25/32")                                    |          |                    | 6 m (19' 8 1/4")     | 941.00.960 |
|  | Gliders, self adhesive, for 8 mm (5/16") thick glass                                 | Plastic  | –                  | –                    | 940.40.033 |
|  | Gliders, self adhesive, for 10 mm (13/32") thick glass                               | Plastic  | –                  | –                    | 940.40.034 |

|                    |                          |
|--------------------|--------------------------|
| Flush pulls        | pages 1.363, 1.371-1.373 |
| Pull handles       | pages 2.10-2.32          |
| Sliding door locks | pages 1.357, 1.364-1.367 |

## HAWA Junior 80/GS


### Set

- For 1 sliding door without upper track and lower guide channel

|  | Item No.   |
|--|------------|
|  | 940.81.000 |

**Supplied With**  
Mounting instructions



### Set Components

|                                                                                                     | Description                                         | Material | Finish | Qty.   | Item No.   |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------|----------|--------|--------|------------|
|                    | Double roller running gear                          | –        | –      | 2 pcs. | 940.80.012 |
|                    | Suspension bolt, M10                                | –        | –      | 2 pcs. | 941.00.072 |
|                                                                                                     | Clamp shoe, adjustable from 6 – 12.7 (1/4" – 1/2")  | Aluminum | –      | 2 pcs. | 941.00.020 |
|                    | Track stopper with adjustable retention spring      | –        | –      | 2 pcs. | 940.80.040 |
|  | Floor guide, adjustable from 6 – 12.7 (1/4" – 1/2") | –        | –      | 1 pc.  | 941.00.031 |
|                    | Buffer                                              | Rubber   | black  | 1 pc.  | 407.01.930 |

### Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.



### Individual Components

|                                                                                                             | Description                                            | Material | Finish         | Length             | Item No.   |
|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|----------|----------------|--------------------|------------|
|                          | Upper track, pre-drilled                               | Aluminum | clear anodized | 1.4 m (4' 7 1/8")  | 940.80.140 |
|                                                                                                             |                                                        |          |                | 1.6 m (5' 3")      | 940.80.160 |
|                                                                                                             |                                                        |          |                | 1.8 m (5' 10 7/8") | 940.80.180 |
|                                                                                                             |                                                        |          |                | 2 m (6' 6 3/4")    | 940.80.200 |
|                                                                                                             |                                                        |          |                | 2.2 m (7' 2 5/8")  | 940.80.220 |
|                                                                                                             |                                                        |          |                | 2.5 m (8' 2 7/16") | 940.80.250 |
|                                                                                                             |                                                        |          |                | 3 m (9' 10 1/8")   | 940.80.300 |
|                                                                                                             |                                                        |          |                | 4 m (13' 1 1/2")   | 940.80.400 |
|                                                                                                             |                                                        |          |                | 6 m (19' 8 1/4")   | 940.80.600 |
|  | Gliders, self adhesive, for 8 mm (5/16") thick glass   | Plastic  | –              | –                  | 940.40.033 |
|  | Gliders, self adhesive, for 10 mm (13/32") thick glass | Plastic  | –              | –                  | 940.40.034 |
|      | Lower guide channel, 20 x 20 mm (25/32" x 25/32")      | Aluminum | anodized       | 2.5 m (8' 2 7/16") | 941.00.925 |
|                                                                                                             | Lower guide channel, 20 x 20 mm (25/32" x 25/32")      |          |                | 6 m (19' 8 1/4")   | 941.00.960 |

|                                            |                   |
|--------------------------------------------|-------------------|
| Angle profile                              | page 1.288        |
| Toplock                                    | pages 1.352-1.356 |
| Clip-on fascias and end caps to clamp shoe | page 1.219        |
| Floor mounted door stop                    | page 1.290        |
| Glass edge protection profiles             | page 1.291        |
| Soft close                                 | page 1.287        |

## HAWA Junior 80/GP



### Individual Components

|                                                                                     | Description                                                                          | Material | Finish             | Length               | Item No.   |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------|--------------------|----------------------|------------|
| <b>Installation option 1</b>                                                        |                                                                                      |          |                    |                      |            |
|    | Patch suspension                                                                     | –        | –                  | –                    | 940.40.038 |
|    | Lower guide, spring loaded, for single guide track                                   | –        | –                  | –                    | 940.40.039 |
|    | Single lower guide track for clip fixing or glue fixing                              | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 940.41.725 |
|                                                                                     |                                                                                      |          |                    | 3.5 m (11' 5 13/16") | 940.41.735 |
|    | Fixing set, for single lower guide track. 5 pcs each, 2 pcs. per meter required      | Plastic  | black              | –                    | 404.97.990 |
| <b>Installation option 2</b>                                                        |                                                                                      |          |                    |                      |            |
|    | Patch suspension                                                                     | –        | –                  | –                    | 940.40.038 |
|    | Lower guide with mouting screws, suitable for patch suspension unit                  | –        | –                  | –                    | 940.40.035 |
|    | Lower guide channel, 24 x 24 mm (15/16" x 15/16"), not drilled                       | Aluminum | anodized           | 6 m (19' 8 1/4")     | 940.81.600 |
|   | End stop for guide channel 24 x 24 mm (15/16" x 15/16")                              | Aluminum | anodized           | –                    | 940.80.051 |
| <b>Installation option 3</b>                                                        |                                                                                      |          |                    |                      |            |
|  | Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2") | Steel    | chrome plated matt | –                    | 940.40.032 |
| <b>Installation option 4</b>                                                        |                                                                                      |          |                    |                      |            |
|  | Lower guide channel, 20 x 20 mm (25/32" x 25/32")                                    | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 941.00.925 |
|                                                                                     | Lower guide channel, 20 x 20 mm (25/32" x 25/32")                                    |          |                    | 6 m (19' 8 1/4")     | 941.00.960 |
|  | Gliders, self adhesive, for 8 mm (5/16") thick glass                                 | Plastic  | –                  | –                    | 940.40.033 |
|  | Gliders, self adhesive, for 10 mm (13/32") thick glass                               | Plastic  | –                  | –                    | 940.40.034 |

|                             |                          |
|-----------------------------|--------------------------|
| Fixed glass panel for 80/GP | pages 1.260-1.261        |
| Flush pulls                 | pages 1.363, 1.371-1.373 |
| Pull handles                | pages 2.10-2.32          |
| Sliding door locks          | pages 1.357, 1.364-1.367 |

## HAWA Junior 120/GP



### Individual Components

|                                                                                     | Description                                                                                                                | Material | Finish             | Length               | Item No.   |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------|--------------------|----------------------|------------|
| <b>Installation option 1</b>                                                        |                                                                                                                            |          |                    |                      |            |
|    | Patch suspension                                                                                                           | –        | –                  | –                    | 940.40.038 |
|    | Lower guide, spring loaded, for single guide track                                                                         | –        | –                  | –                    | 940.40.039 |
|    | Single lower guide track for clip fixing or glue fixing                                                                    | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 940.41.725 |
|                                                                                     |                                                                                                                            |          |                    | 3.5 m (11' 5 13/16") | 940.41.735 |
|    | Fixing set, for single lower guide track. 5 pcs., 2 pcs. per meter required                                                | Plastic  | black              | –                    | 404.97.990 |
| <b>Installation option 2</b>                                                        |                                                                                                                            |          |                    |                      |            |
|    | Patch suspension                                                                                                           | –        | –                  | –                    | 940.40.038 |
|    | Lower guide with mounting screws, suitable for patch suspension unit                                                       | –        | –                  | –                    | 940.40.035 |
|    | Lower guide channel, 24 x 24 mm (15/16" x 15/16"), not drilled                                                             | Aluminum | anodized           | 6 m (19' 8 1/4")     | 940.81.600 |
|   | End stop for guide channel 24 x 24 mm (15/16" x 15/16")                                                                    | Aluminum | anodized           | –                    | 940.80.051 |
| <b>Installation option 3</b>                                                        |                                                                                                                            |          |                    |                      |            |
|  | Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")                                       | Steel    | chrome plated matt | –                    | 940.40.032 |
| <b>Installation option 4</b>                                                        |                                                                                                                            |          |                    |                      |            |
|  | Guide channel, 20 x 20 x 3 mm (13/16" x 13/16" x 1/8"), pre-drilled                                                        | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 941.00.925 |
|                                                                                     |                                                                                                                            |          |                    | 6 m (19' 8 1/4")     | 941.00.960 |
|  | Self-adhesive sliders, for lower guide channel 20 x 20 x 3 mm (13/16" x 13/16" x 1/8"), for glass thickness 8 mm (5/16")   | –        | –                  | –                    | 940.40.033 |
|  | Self-adhesive sliders, for lower guide channel 20 x 20 x 3 mm (13/16" x 13/16" x 1/8"), for glass thickness 10 mm (13/32") | –        | –                  | –                    | 940.40.034 |

|                          |                          |
|--------------------------|--------------------------|
| Junior 40/GP/Fixed Glass | pages 1.272-1.273        |
| Flush pulls              | pages 1.363, 1.371-1.373 |
| Pull handles             | pages 2.10-2.32          |
| Sliding door locks       | pages 1.357, 1.364-1.367 |


## HAWA Junior 160/GP

### Individual Components

|                                                                                     | Description                                                                                                                | Material | Finish             | Length               | Item No.   |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------|--------------------|----------------------|------------|
| <b>Installation option 1</b>                                                        |                                                                                                                            |          |                    |                      |            |
|    | Patch suspension                                                                                                           | –        | –                  | –                    | 940.40.038 |
|    | Lower guide, spring loaded, for single guide track                                                                         | –        | –                  | –                    | 940.40.039 |
|    | Single lower guide track for clip fixing or glue fixing                                                                    | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 940.41.725 |
|                                                                                     |                                                                                                                            |          |                    | 3.5 m (11' 5 13/16") | 940.41.735 |
|    | Fixing set, for single lower guide track. 5 pcs., 2 pcs. per meter required                                                | Plastic  | black              | –                    | 404.97.990 |
| <b>Installation option 2</b>                                                        |                                                                                                                            |          |                    |                      |            |
|    | Patch suspension                                                                                                           | –        | –                  | –                    | 940.40.038 |
|    | Lower guide with mounting screws, suitable for patch suspension unit                                                       | –        | –                  | –                    | 940.40.035 |
|    | Lower guide channel, 24 x 24 mm (15/16" x 15/16"), not drilled                                                             | Aluminum | anodized           | 6 m (19' 8 1/4")     | 940.81.600 |
|   | End stop for guide channel 24 x 24 mm (15/16" x 15/16")                                                                    | Aluminum | anodized           | –                    | 940.80.051 |
| <b>Installation option 3</b>                                                        |                                                                                                                            |          |                    |                      |            |
|  | Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")                                       | Steel    | chrome plated matt | –                    | 940.40.032 |
| <b>Installation option 4</b>                                                        |                                                                                                                            |          |                    |                      |            |
|  | Guide channel, 20 x 20 x 3 mm (13/16", 13/16" x 1/8"), pre-drilled                                                         | Aluminum | anodized           | 2.5 m (8' 2 7/16")   | 941.00.925 |
|                                                                                     |                                                                                                                            |          |                    | 6 m (19' 8 1/4")     | 941.00.960 |
|  | Self-adhesive sliders, for lower guide channel 20 x 20 x 3 mm (13/16" x 13/16" x 1/8"), for glass thickness 8 mm (5/16")   | –        | –                  | –                    | 940.40.033 |
|  | Self-adhesive sliders, for lower guide channel 20 x 20 x 3 mm (13/16" x 13/16" x 1/8"), for glass thickness 10 mm (13/32") | –        | –                  | –                    | 940.40.034 |

|                    |                          |
|--------------------|--------------------------|
| Flush pulls        | pages 1.363, 1.371-1.373 |
| Pull handles       | pages 2.10-2.32          |
| Sliding door locks | pages 1.357, 1.364-1.367 |

## HAWA Individual Components

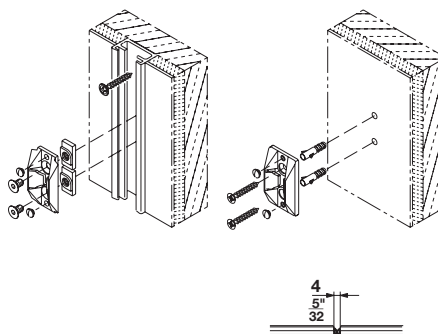
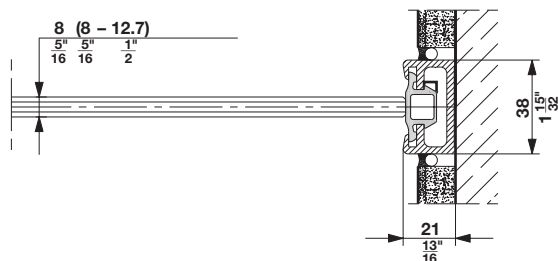
| Description                                                                                                                                          | Material | Finish              | Length               | Item No.   |
|------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------|----------------------|------------|
|  Profile, self-adhesive, for 8 – 10 mm (5/16" – 13/32") thick glass | Rubber   | black               | 5 m (16' 4 7/8")     | 404.95.321 |
|  Wall profile, undrilled                                            | Aluminum | anodized            | 2.5 m (8' 2 7/16")   | 941.24.925 |
|                                                                                                                                                      |          |                     | 3.5 m (11' 5 13/16") | 941.24.935 |
|  Seal for wall profile                                              | Rubber   | black               | 2.5 m (8' 2 7/16")   | 941.24.081 |
|                                                                                                                                                      |          |                     | 3.5 m (11' 5 13/16") | 941.24.082 |
|  Centering element to wall profile, adjustable                      | –        | –                   | –                    | 941.24.043 |
|  Centering element, for glass sliding door                          | Plastic  | gray                | –                    | 941.24.042 |
|  Gliders, self adhesive, for 8 mm (5/16") thick glass               | Plastic  | –                   | –                    | 940.40.033 |
|  Gliders, self adhesive, for 10 mm (13/32") thick glass             | Plastic  | –                   | –                    | 940.40.034 |
|  Lower guide channel, 24 x 24 mm (15/16" x 15/16")                  | Aluminum | anodized            | 6 m (19' 8 1/4")     | 940.81.600 |
|  Door stopper, to lower guide channel (used only with 940.81.600)  | Aluminum | anodized            | –                    | 940.80.051 |
|  Lower guide channel, 20 x 20 mm (25/32" x 25/32")                | Aluminum | anodized            | 2.5 m (8' 2 7/16")   | 941.00.925 |
|                                                                                                                                                      |          |                     | 6 m (19' 8 1/4")     | 941.00.960 |
|  Floor mounted door stop, up to 250 kg (550 lbs.)                 | Aluminum | chrome-plated, matt | –                    | 940.40.052 |

### Note

Mounting instructions (included in fitting set) for planning and execution available upon request.

### Wall Centering Element

The ideal wall connection profile for all-glass sliding doors with unprotected glass edges.



### Rubber Profile for Glass Edge Protection

Self-adhesive rubber profile is recommended for glass doors that can strike against one another.