


1

## Slido Classic Synchro Additional Set

For Slido Classic 40-P, 60-P and 80-P

- For 2 bi-parting wood doors
- For symmetrical opening of 2 door panels
- Door width  $\geq 600$  and  $\geq 1500$  mm ( 23 5/8" and 59 1/16")

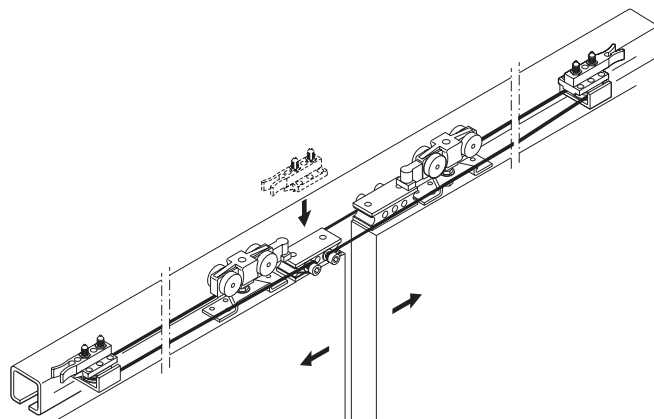




### Additional Fitting Set

	Item No.
	940.44.000

#### Note

The additional set can only be used in combination with standard equipment consisting of two sets for 1 sliding door (Classic 40-P, 60-P, or 80-P) and upper track. Not suitable for versions with soft close.

### Individual Components

	Description	Qty.	Item No.
	Track stopper with deflection roller	2 pcs.	940.44.070
	Cable fixing block	2 pcs.	940.44.073
	Cable with plastic sheathing 10 m (393 11/16")	1 pc.	940.44.079


#### Note

Item numbers refer to 1 pc.  
Please specify required quantity when ordering individual components.

## Impact Dampener

For Slido Classic 40-P, 60-P and 80-P

- Replaces the pocket door edge pull
- For proper function of the impact dampener, a clearance of 20 mm (25/32") between the edge of the door and the structure must be provided

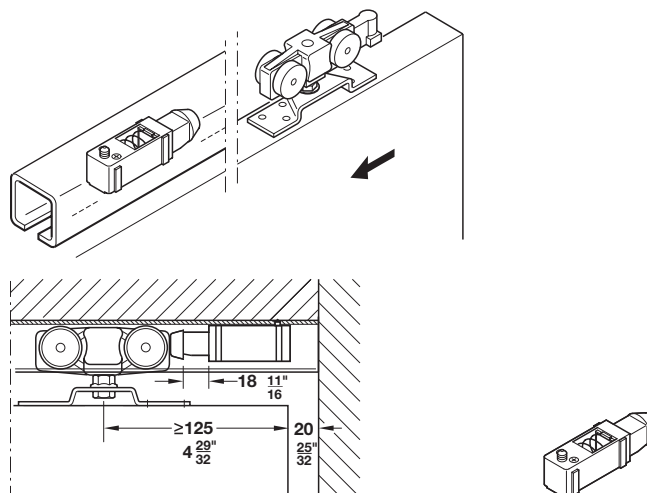

Door weight	Item No.
40 kg (88 lbs.)	940.42.070
80 kg (176 lbs.)	940.42.071
120 kg (264 lbs.)	940.42.072

#### Installation

Simply press on the edge of the sliding door and the spring of the impact dampener will push the sliding door far enough out so you can reach the flush pulls.

The impact dampener is simply inserted on one end of the upper track and fixed in place with a set screw


#### Note

Not suitable for use in combination with soft close mechanism.

## Slido Classic Synchro Additional Set

### For Slido Classic 80-L

- For 2 bi-parting sliding doors
- For symmetrical opening of 2 door panels
- Door width  $\geq 600$  and  $\geq 1500$  mm ( 23 5/8" and 59 1/16")

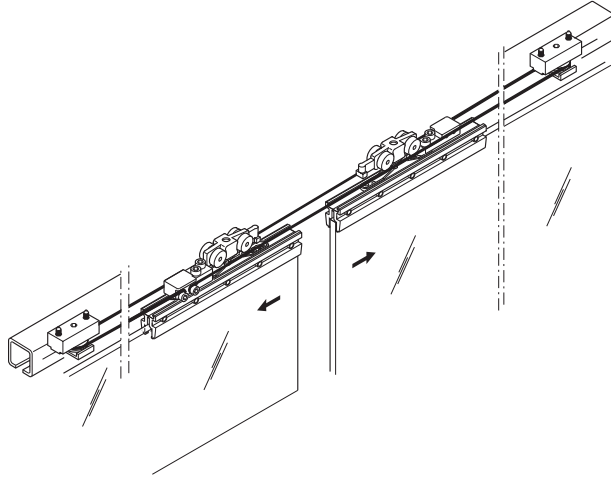




### Additional Fitting Set

	Item No.
	941.02.005

#### Note

The additional set can only be used in combination with 2 sets (Classic 80-L) and upper track. Not suitable for versions with soft close.

### Individual Components

	Description	Qty.	Item No.
	Track stopper with deflection roller	2 pcs.	940.60.090
	Cable fixing block	2 pcs.	940.60.099
	Cable with plastic sheathing 10 m (393 11/16")	1 pc.	940.44.074



#### Note


Item numbers refer to 1 pc.  
Please specify required quantity when ordering individual components.

## Impact Dampener

### For Slido Classic 80-L to 120-L

- Replaces the pocket door edge pull
- For proper function of the impact dampener, a clearance of 20 mm (25/32") between the edge of the door and the structure must be provided

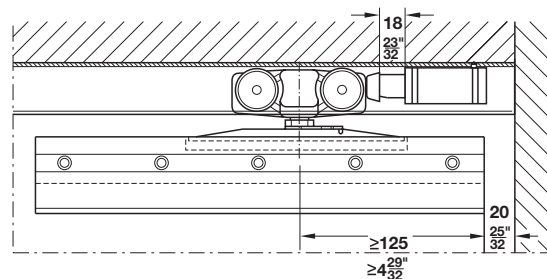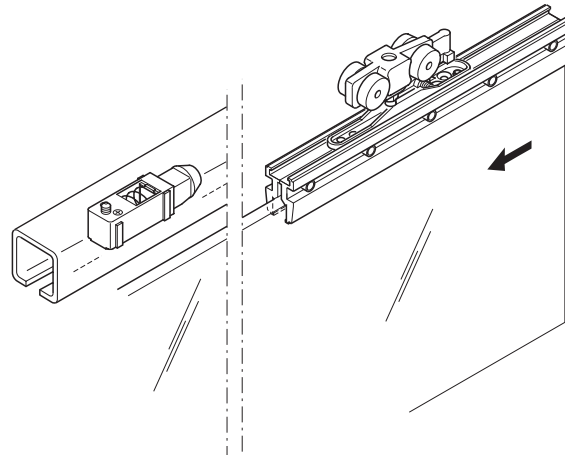

	Door weight	Item No.
	80 kg (176 lbs.)	940.42.071
	120 kg (264 lbs.)	940.42.072

#### Installation

Simply press on the edge of the sliding door and the spring of the impact dampener will push the sliding door far enough out so you can reach the flush pulls.

The impact dampener is simply inserted on one end of the upper track and fixed in place with a set screw.

#### Note

Not suitable for use in combination with soft close mechanism.