

Häfele Slido D-Line43 80N Sets


	Supplied with	Finish	Door width	Item No.
With aluminum frame and running track for 1 door with soft and self-closing mechanism	1 set of aluminum frames with attaching parts 1 set of sealing profiles for panel 1 running track 1 running gear 2 soft and self-closing mechanisms 1 guide track 1 floor guide 1 set of guide rollers 2 spacers 1 pair of end caps 1 floor mounted door stop (optional use) 2 hex keys 1 open-ended spanner	silver colored anodized	1.1 m (43 5/16")	940.59.016
			1.5 m (59 1/16")	940.59.017
		black anodized	1.1 m (43 5/16")	940.59.018
			1.5 m (59 1/16")	940.59.019

Note


Frame height and width can be cut to size.

Flexible sealing profile can be used for panel thickness 5–8 mm (3/16"–5/16").


→ Tracks

Description		Material	Finish	Door width	Item No.
Bottom track for soft floors, with double-sided adhesive tape W x H: 30 x 5 mm (1 3/16" x 3/16")		Aluminum	silver colored anodized	2.2 m (7' 2 5/8")	940.59.802
				3.6 m (11' 9 3/4")	940.59.803
			black anodized	2.2 m (7' 2 5/8")	940.59.812
				3.6 m (11' 9 3/4")	940.59.813

Wall mounting

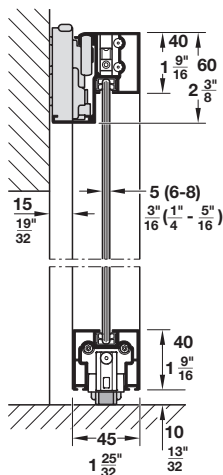


Floor guide on hard floors

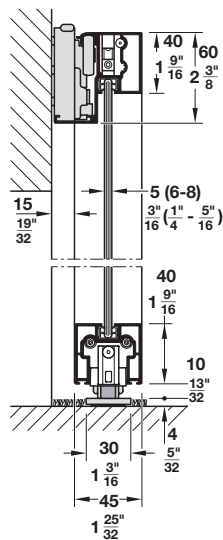

Floor guide on soft floors with running track mounted on site

Cut-out dimensions

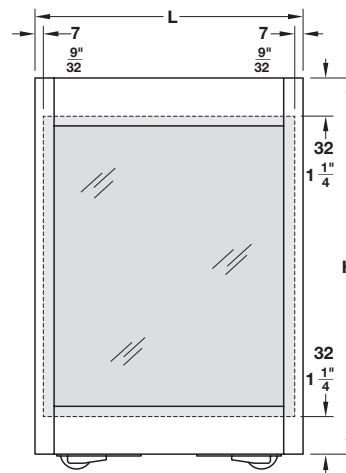

Panel size calculation

Panel height: H – 64 mm

2 17/32"

Panel width: L – 14 mm

9/16"

Note

A slight trace of wear may appear on the floor, depending on material.

Tile gaps are noticeable when moving the door.

Mounting reference

- > Make sure that floor is even and level
- > Bottom track is required for soft floors
- > Prepare wall structure for top running gear