

EKU Divido 100 H Set


- For 1 sliding door without upper track

Item No.
941.00.111

Set Components

	Description	Material	Finish	Qty.
	Running gear, with four wheels	Plastic	white	2 pcs.
	Suspension bolt, M8 x 32 mm	Steel	zinc-plated	2 pcs.
	Set nut, M8	Steel	zinc-plated	2 pcs.
	Suspension plate	Steel	zinc-plated	2 pcs.
	Door stopper with adjustable retention spring	Plastic	gray	2 pcs.
	Lower guide	Plastic	anthracite gray	1 pc.
	Fixing screws	–	–	–

Individual Components

	Description	Material	Finish	Length	Item No.
	Single upper track, 39 x 41 mm (1 9/16" x 1 5/8")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
				3.5 m (11' 5 13/16")	941.00.353
				6 m (19' 8 1/4")	941.00.603
	Dual upper track, 73 x 31 mm (2 7/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.925
				3.5 m (11' 5 13/16")	941.12.935
				6 m (19' 8 1/4")	941.12.960
	Triple upper track 111 x 31 mm (4 3/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.425
				3.5 m (11' 5 13/16")	941.13.435
				6 m (19' 8 1/4")	941.13.460
	Spacer profile for wall mounting of single upper track 11 x 36 mm (7/16" x 1 7/16")	Plastic	gray	2 m (6' 6 3/4")	941.13.220
	Clip-in skirt, 10 x 42 mm (3/8" x 1 11/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.325
				3.5 m (11' 5 13/16")	941.12.335
				6 m (19' 8 1/4")	941.12.360
	Clip-on fascia to upper track, 7 x 60 mm (5/16" x 2 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.425
				3.5 m (11' 5 13/16")	941.12.435
				6 m (19' 8 1/4")	941.12.460
	Brush seal for clip-on fascia, 5 x 5 mm (3/16" x 3/16")	Plastic	gray	10 m (32' 9 11/16")	405.80.501
	End piece to fascia, one-sided, wall mounted, 51 x 60 mm (2" x 2 3/8")	Aluminum	anodized	–	941.12.060
	Clip piece for wood fascia, 97 x 29 x 9.5 mm (3 13/16" x 1 1/8" x 3/8"), mounted every 500 mm (19 11/16")	Aluminum	unanodized	–	940.60.065
	Soft close	–	–	10 - 60 kg (22 - 132 lbs.)	940.60.045
				61 - 100 kg (133 - 200 lbs.)	940.60.010
	Cover cap, for soft close	–	–	–	940.60.094
	Milling jig, for soft close	–	–	–	940.60.095

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

EKU Divido 100 HM Set





- For 1 sliding door without upper track

	Item No.
	941.00.115

Set Components

	Description	Material	Finish	Qty.
	Running gear, with four wheels	Plastic	white	2 pcs.
	Suspension bolt, M8 x 35 mm	Steel	zinc-plated	2 pcs.
	Carrier block	Plastic	white	2 pcs.
	Suspension profile for carrier block	Aluminum	unanodized	2 pcs.
	Door stopper with adjustable retention spring	Plastic	gray	2 pcs.
	Lower guide	Plastic	anthracite gray	1 pc.
	Fixing screws	—	—	1 set

Individual Components

	Description	Material	Finish	Length	Item No.
	Single upper track, 30 x 31 mm (1 3/16" x 1 1/4")	Aluminum	unanodized	2 m (6' 6 3/4")	941.00.200
				2.5 m (8' 2 7/16")	941.00.250
				6 m (19' 8 1/4")	941.00.600
	Dual upper track, 73 x 31 mm (2 7/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.925
				3.5 m (11' 5 13/16")	941.12.935
				6 m (19' 8 1/4")	941.12.960
	Triple upper track, 111 x 31 mm (4 3/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.425
				3.5 m (11' 5 13/16")	941.13.435
				6 m (19' 8 1/4")	941.13.460
	Track cleaning tool	Aluminum	silver	—	941.00.099
	Soft close	—	—	10 - 60 kg (22 - 132 lbs.)	940.60.045
				61 - 100 kg (133 - 200 lbs.)	940.60.010
	Cover cap, for soft close	—	—	—	940.60.094
	Milling jig, for soft close	—	—	—	940.60.095

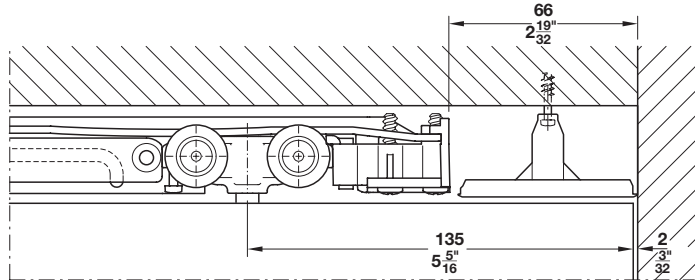
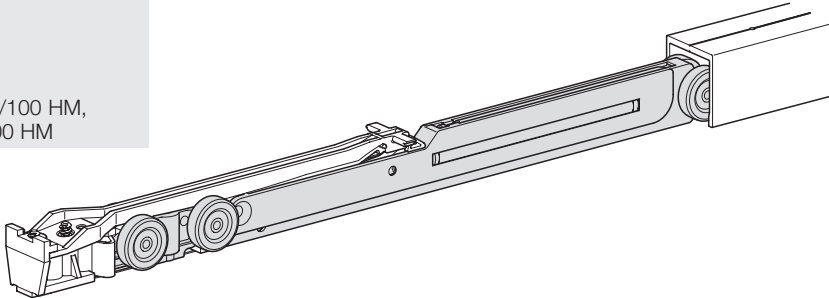
Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

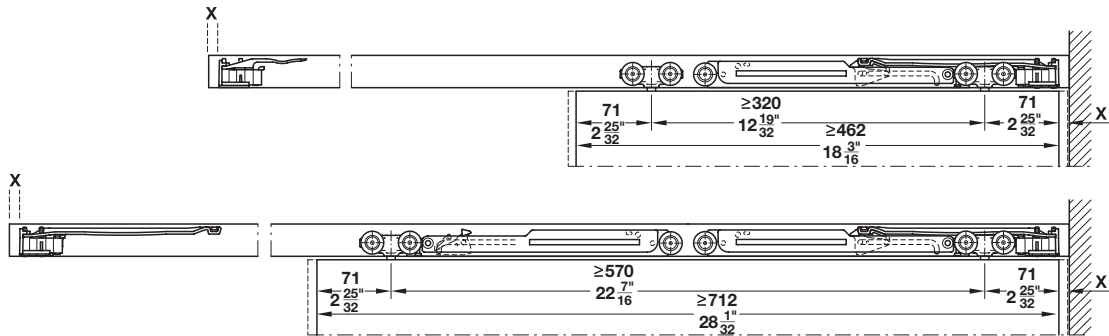
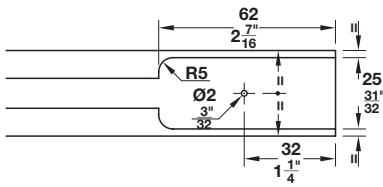
EKU Soft and Self Close Mechanism

For EKU Porta 60/100 and Divido 100


- For door weights from 20 – 100 kg (44 – 220 lbs.)
- For 1 and 2 sliding doors
- For soft and self close on one or both sides
- Suspending in running gear
- For use with EKU Porta: 60/100 H, 60/100 HC, 60/100 HM, 60/100 HMD, 60/100 HMT; EKU Divido: 100 H, 100 HM



Installation with installation opening



Installation without installation opening, X = dim. end caps

	Description	Door weight	Item No.
	Soft close	61 – 100 kg (134.2 – 220 lbs)	940.60.010
		20 – 60 kg (44 – 132 lbs)	940.60.045
	Cover cap, for installation opening on running track	–	940.60.094
	Routing jig, for installation opening	–	940.60.095

Note

An installation opening with cover cap allows retrofitting the soft and self close mechanism.

Dimensional data not binding. We reserve the right to alter specifications without notice.

EKU Porta 100 G Set

- For 1 sliding door without upper track

Item No.
941.00.007






Set Components

Description	Material	Finish	Qty.	Item No.
 Double roller running gear	–	–	2 pcs.	941.00.015
 Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
 Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
 Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
 Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
 Track stopper	Plastic	gray	1 pc.	940.60.041
 Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
 Buffer	Rubber	black	1 pc.	940.60.051

Note

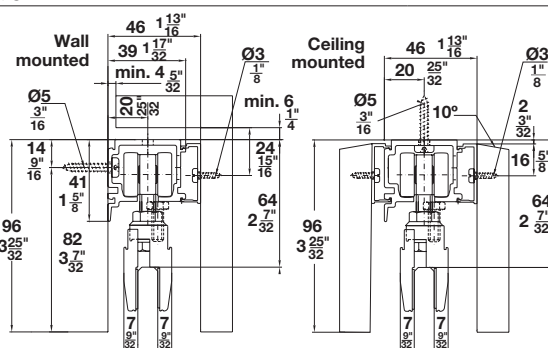
Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

Description	Material	Finish	Length	Item No.
 Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
 Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	6 m (19' 8 1/4")	941.00.603
 Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
 Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	6 m (19' 8 1/4")	941.00.860
 End piece to fascia, one-sided, wall mounted	Aluminum	anodized	44.5 mm (1 3/4")	941.00.066
 End piece to fascia, one-sided, ceiling mounted	Aluminum	anodized	49 mm (1 59/64")	941.00.070
 Clip piece for wood fascia, 97 x 29 x 9.5 mm (3 13/16" x 1 1/8" x 3/8")	Aluminum	unanodized	–	940.60.065
 Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
Soft close 10 - 60 kg (22 - 132 lbs.)				940.60.045
Soft close 61 - 100 kg (135 - 220 lbs.)				940.60.010
Cover cap for notched service access in track				940.60.094
Drill jig for notched service access in track				940.60.095


Note

Mounting instructions (included in fitting set) for planning and execution available upon request.



Mounting options with wood fascias

Fixing distance for clip component every 400 to 600 mm (15 3/4"–23 5/8")



Floor mounted door stop

page 1.290

Toplock

pages 1.352-1.356

Dimensions in mm
Inches are approximate

EKU Porta 100 GF Set

- For 1 sliding door without upper track

Item No.
941.00.007





Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")			6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")			6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")			6 m (19' 8 1/4")	941.01.760
	Fixing set for support profile and fixed glazing profile	–	–	–	941.01.899
	End piece to fascia, one-sided, wall mounted	Aluminum	anodized	64 mm (2 3/16")	941.00.068
	End piece to fascia, one-sided, wall mounted			70 mm (2 3/4")	941.00.069
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft close 10 – 60 kg (22 – 132 lbs.)				940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)	–	–	–	940.60.010
	Cover cap for notched service access in track				940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.









Floor mounted door stop page 1.290

Toplock pages 1.352-1.356

Dimensions in mm
Inches are approximate

EKU Porta 100 GFO

Individual Components

	Description	Material	Finish	Length	Item No.
	Wall bracket set, set for mounting 1 upper track	–	–	–	941.00.060
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Reinforcement profile, 43 x 70 mm (1 11/16" x 2 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.525
				6 m (19' 8 1/4")	941.01.560
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
				6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")			6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")			6 m (19' 8 1/4")	941.01.760
	Angle profile for fixed glass, pre-drilled, 30 x 19 mm (1 3/16" x 3/4")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.420
	Angle profile for fixed glass, 30 x 17 mm (1 3/16" x 11/16")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.320
	Wall profile, 38 x 21 mm (1 1/2" x 13/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.24.925
				3.5 m (11' 5 13/16")	941.24.935
	Seal for wall profile	Rubber	black	2.5 m (8' 2 7/16")	941.24.081
				3.5 m (11' 5 13/16")	941.24.082
	Fixing set for support profile and Fixed glazing profile	–	–	–	941.01.899
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft closer 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft closer 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.

EKU Porta 100 GU Set
Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
				6 m (19' 8 1/4")	941.00.603
	Clip-on fascia, to upper track, 46 x 43 mm (1 13/16" x 1 11/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.925
				6 m (19' 8 1/4")	941.01.960
	Clip-on fascia, to clamping shoe, 56 x 10 mm (2 3/16" x 13/32") Note Has to be cut to size, refer to drawings on page 1.218	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.625
	End caps, to clip-on fascia to upper track and clamp shoe Order requirements: Option A 1 set Option B and C 2 sets	Plastic	anthracite	-	941.01.999
	End caps for clip-on fascia to clamp shoe Order requirements: Option A 1 set Option B and C 2 sets	Plastic	anthracite	-	941.01.998
	Soft closer 10 – 60 kg (22 – 132 lbs)	-	-	-	940.60.045
	Soft closer 61 – 100 kg (135 – 220 lbs)				940.60.010
	Cover cap for notched service access in track				940.60.094
	Drill jig for notched service access in track				940.60.095

Note


Mounting instructions (included in fitting set) for planning and execution available upon request. Clip-on fascias and end caps can also be used for the Junior 40 and 80/GS sliding systems.

EKU Porta 100 GW Set

- For 1 sliding door without upper track

Item No.
941.00.005


Set Components

Description	Material	Finish	Qty.
 Double roller running gear	–	–	2 pcs.
 Suspension bolt, M8 x 25	Steel	zinc-plated	2 pcs.
 Clamp shoe, adjustable from 8 – 12.7 mm (5/16" – 1/2")	Aluminum	mill	2 pcs.
 Track stopper, with adjustable retention spring	Plastic	gray	1 pc.
 Track stopper	Plastic	gray	1 pc.
 Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.
 Buffer	Rubber	black	1 pc.
 Fascia clip	Plastic	gray	12 pcs.
 Mounting screws	–	–	1 set

Note

Items are not available separately; use fascia clip every 200 mm (7 7/8").

Individual Components

Description	Material	Finish	Length	Item No.
 Upper track, pre-drilled, 69 X 58 mm (2 23/32" x 2 9/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.425
			3.5 m (11' 5 25/32")	941.00.435
			6 m (19' 8 1/4")	941.00.460
 Clip-on fascia, 30 X 8 mm (1 3/16" x 21/64")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.025
			3.5 m (11' 5 25/32")	941.01.035
			6 m (19' 8 1/4")	941.01.060
 Seal	Plastic	black	20 m (65' 7 13/32")	941.00.094
 Disposable cover	Plastic	–	2 m (6' 6 3/4")	941.00.207
 Milling jig for notched service access in track 43 mm (1 11/16")	–	–	–	941.00.095
 Wall mounting angle profile, pre-drilled	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.226
 End cap set for angle profile and upper track. Includes screws for track length up to 2.5 m (8' 2 7/16").	Plastic	anthracite gray	–	941.00.077
 End cap set for upper track only	Plastic	anthracite gray	–	941.00.079
 Screw set for angle profile for tracks, >2.5 m (8' 2 7/16").	Steel	zinc-plated	–	941.00.078
	–	–	Soft closer 10 - 60 kg (22 - 132 lbs.)	940.60.045
			Soft closer 61 - 100 kg (135 - 220 lbs.)	940.60.010
			Cover cap for notched service access in track	940.60.094
			Milling jig for notched service access in track, 62 mm (2 7/16")	940.60.095

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

EKU Porta 100 GWF Set

- For 1 sliding door without upper track

Item No.
941.00.005


Set Components

	Description	Material	Finish	Qty.
	Double roller running gear	–	–	2 pcs.
	Suspension bolt, M8 x 25	Steel	zinc-plated	2 pcs.
	Clamp shoe, adjustable from 8 – 12.7 mm (5/16" – 1/2")	Aluminum	mill	2 pcs.
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.
	Track stopper	Plastic	gray	1 pc.
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.
	Buffer	Rubber	black	1 pc.
	Fascia clip	Plastic	gray	12 pcs.
	Mounting screws	–	–	1 set

Note

Items are not available separately; use fascia clip every 300 mm (11 13/16").

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 86 x 58 mm (3 3/8" x 2 9/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.256
				3.5 m (11' 5 25/32")	941.00.356
				6 m (19' 8 1/4")	941.00.606
	Clip-on fascia, 30 x 8 mm (1 3/16" x 21/64")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.025
				3.5 m (11' 5 25/32")	941.01.035
				6 m (19' 8 1/4")	941.01.060
	Cover profile (fills unused space of fixed glass openings), 15 x 15 mm (19/32" x 19/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.525
				3 m (9' 10 1/8")	941.12.530
				6 m (19' 8 1/4")	941.12.560
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
				3.5 m (11' 5 25/32")	941.01.735
				6 m (19' 8 1/4")	941.01.760
	Sealing profile	Rubber	black	20 m (65' 7 13/32")	941.00.103
	Seal	Plastic	black	20 m (65' 7 13/32")	941.00.094
	Disposable cover	Plastic	–	2 m (6' 6 3/4")	941.00.207
	Milling jig	–	–	–	941.00.095
	Mounting set for fixed glazing profile	Aluminum	anodized	–	941.01.899
	Soft close 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094
	Drilling jig for notched service access in track				940.60.095


Dimensions in mm
Inches are approximate

EKU Divido 100 GR Set




- For 1 sliding door without upper track

Item No.
941.12.000

Individual Components

	Description	Material	Finish	Qty.
	Running gear with four wheels	Plastic	white	2 pcs.
	Suspension bolt, M8 x 35 mm	Steel	zinc-plated	2 pcs.
	Set nut, M8	Steel	zinc-plated	2 pcs.
	Suspension plate	Aluminum	–	2 pcs.
	Door stopper with adjustable retention spring	Plastic	gray	2 pcs.
	Lower guide with plastic horizontal wheels	Steel	zinc-plated	1 pc.
	Fixing screws	–	–	1 set

Individual Components

	Description	Material	Finish	Length	Item No.
	Single upper track, 39 x 41 mm (1 9/16" x 1 5/8")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
				3.5 m (11' 5 25/32")	941.00.353
				6 m (19' 8 1/4")	941.00.603
	Dual upper track, 73 x 31 mm (2 7/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.925
				3.5 m (11' 5 25/32")	941.12.935
				6 m (19' 8 1/4")	941.12.960
	Spacer profile for wall mounting of single upper running track, 11 x 36 mm (7/16" x 1 7/16")	Plastic	gray	2 m (6' 6 3/4")	941.13.220
	Clip-in skirt, 10 x 42 mm (13/32" x 1 11/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.325
				3.5 m (11' 5 25/32")	941.12.335
				6 m (19' 8 1/4")	941.12.360
	Clip-on fascia to upper running track, 7 x 60 mm (5/16" x 2 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.425
				3.5 m (11' 5 25/32")	941.12.435
				6 m (19' 8 1/4")	941.12.460
	Brush seal for clip-on fascia, 5 x 5 mm (3/16" x 3/16")	Plastic	gray	10 m (32' 9 11/16")	405.80.501
	End piece to fascia, one-sided, wall mounted, 51 x 60 mm (2" x 2 3/8")	Aluminum	anodized	–	941.12.060
	Soft close 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094
	Drill jig for notched service access in track				940.60.095

Installation Plan

(included in fitting set), mounting instructions for planning and execution available upon request.

Aluminum frame profiles pages 1.226-1.227



Dimensions in mm
Inches are approximate

EKU Divido 100 GRM Set


- For 1 sliding door without upper track

Item No.
941.00.001

Set Components

	Description	Material	Finish	Qty.
	Running gear with four wheels	Plastic	white	2 pcs.
	Suspension bolt, M8 x 35 mm	Steel	zinc-plated	2 pcs.
	Carrier block	Plastic	anthracite	2 pcs.
	Suspension profile for carrier block	Aluminum	–	2 pcs.
	Door stopper with adjustable retention spring	Plastic	gray	2 pcs.
	Lower guide with plastic horizontal wheels	Steel	zinc-plated	1 pc.
	Fixing screws	–	–	1 set

Individual Components

	Description	Material	Finish	Length	Item No.
	Dual upper track, 73 x 31 mm (2 7/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.925
				3.5 m (11' 5 25/32")	941.12.935
				6 m (19' 8 1/4")	941.12.960
	Triple upper track, 111 x 31 mm (4 3/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.425
				3.5 m (11' 5 25/32")	941.13.435
				6 m (19' 8 1/4")	941.13.460
	Soft close 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094
	Drill jig for notched service access in track				940.60.095

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.

EKU Porta 100 GF Set

- For 1 sliding door without upper track

Item No.
941.00.007



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")			6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")			6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")			6 m (19' 8 1/4")	941.01.760
	Fixing set for support profile and fixed glazing profile	–	–	–	941.01.899
	End piece to fascia, one-sided, wall mounted	Aluminum	anodized	64 mm (2 3/16")	941.00.068
	End piece to fascia, one-sided, wall mounted			70 mm (2 3/4")	941.00.069
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft close 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.









Floor mounted door stop page 1.290

Toplock pages 1.352-1.356

Dimensions in mm
Inches are approximate

EKU Porta 100 GFO

Individual Components

	Description	Material	Finish	Length	Item No.
	Wall bracket set, set for mounting 1 upper track	–	–	–	941.00.060
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Reinforcement profile, 43 x 70 mm (1 11/16" x 2 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.525
				6 m (19' 8 1/4")	941.01.560
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
				6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")			6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")			6 m (19' 8 1/4")	941.01.760
	Angle profile for fixed glass, pre-drilled, 30 x 19 mm (1 3/16" x 3/4")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.420
	Angle profile for fixed glass, 30 x 17 mm (1 3/16" x 11/16")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.320
	Wall profile, 38 x 21 mm (1 1/2" x 13/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.24.925
				3.5 m (11' 5 13/16")	941.24.935
	Seal for wall profile	Rubber	black	2.5 m (8' 2 7/16")	941.24.081
				3.5 m (11' 5 13/16")	941.24.082
	Fixing set for support profile and Fixed glazing profile	–	–	–	941.01.899
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft closer 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft closer 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.