

HAWA Junior 80/Z Set

- For 1 sliding door without upper track and lower guide

Item No.
940.80.001



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	940.80.012
	Two-way suspension plate, M10 bolt and mounting screws	–	–	2 pcs.	940.80.022
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention spring	Zinc die-cast	–	1 pc.	940.80.040
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Height adjusting pin	Steel	galvanized	1 pc.	940.40.091

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
Depending on application, an additional track stopper has to be ordered with set. For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides	page 1.198
Angle profile	page 1.196
Other lower guide options	page 1.199
Futura framing kit	pages 1.189–1.191
SoundEx bracket	page 1.197
Soft close	page 1.195

Complete Sets

Door panel width	Track length	Item No.
up to 70 cm (27 9/16")	1.4 m (4' 7 1/8")	407.59.144
up to 80 cm (31 1/2")	1.6 m (5' 3")	407.59.162
up to 90 cm (35 7/16")	1.8 m (5' 10 7/8")	407.59.180
up to 100 cm (39 3/8")	2 m (6' 6 3/4")	407.59.206
up to 110 cm (43 5/16")	2.2 m (7' 2 5/8")	407.59.224
up to 125 cm (49 3/16")	2.5 m (8' 2 7/16")	407.59.251

Supplied With

Upper track	Running gear
Two-way suspension plates	Track stopper
Guide	Rubber bumper
Height adjusting pin	




Dimensions in mm
Inches are approximate

HAWA Telescopic 40/4 Set

- Supplementary fitting set for 4 sliding doors

Item No.
940.41.002

Set Components

	Description	Material	Finish	Qty.	Item No.
	Driver, wide	Aluminum	silver colored anodized	2 pcs.	947.00.050
	Guide pulley wheel long, with screws	–	–	2 pcs.	947.00.048
	Guide pulley wheel short, with screws	–	–	2 pcs.	947.00.049
	Toothed belt mounting device for ceiling/wall mounting, complete		–	2 pcs.	947.00.053
	Toothed belt, 2.7 m (8' 10 5/16")	Glass-fiber reinforced	black	2 pcs.	947.00.054
	Toothed belt, 10 m (32' 9 11/16")	Glass-fiber reinforced	black	1 pc.	947.00.037
	Driver counter-plate, wide	–	–	2 pcs.	947.00.051
	Floor guide - Confort 120 - Telescopic	Plastic	–	2 pcs.	940.40.070
	Deflection roller with end stops	–	–	2 pcs.	940.80.086
	Clamping element for fastening ends of toothed belt	–	–	1 pc.	947.00.055
	Clamping element for fastening continuous toothed belt	–	–	1 pc.	947.00.056

Note



In addition, 4 sets of HAWA Junior 80/Z must be ordered with each Telescopic 40/4 fitting set.

Item No.
Junior 80/Z 940.80.001

Order specifications

- Qty. of Telescopic 40/4 fitting sets
- Qty. of Jr. 80/Z sets
- Length of upper track

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Guide rail	Plastic	black	1.3 m (4' 3 1/8")	940.41.130

Installation Plan (included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides page 1.198



Dimensions in mm
Inches are approximate

HAWA Telescopic 80/2 and 80/3 Sets

- For 2 or 3 door without upper track and lower guide channel

Version	Item No.
For 2 doors	940.81.007
For 3 doors	940.81.008

Set Components

	Description	Material	Finish	2 doors Qty.	3 doors Qty.	Item No.
	Driver, wide	Aluminum	silver colored anodized	1 pc.	2 pcs.	947.00.050
	Guide pulley wheel long, with screws	–	–	1 pc.	2 pcs.	947.00.048
	Guide pulley wheel short, with screws	–	–	1 pc.	2 pcs.	947.00.049
	Toothed belt mounting device for ceiling/wall mounting, complete	–	–	1 pc.	1 pc.	947.00.053
	Toothed belt, 2.7 m (8' 10 5/16")	Glass-fiber reinforced	black	1 pc.	2 pcs.	947.00.054
	Driver counter-plate, wide	–	–	1 pc.	1 pc.	947.00.051
	Floor guide - Confort 120 - Telescopic	Plastic	–	1 pc.	1 pc.	940.40.070
	Lower guide	Plate: Steel Slider: Plastic	–	–	1 pc.	943.04.030
	Driver, narrow	–	–	–	1 pc.	947.00.052

Note


In addition, HAWA Junior 80/Z fitting sets have to be ordered separately as follows:
Telescopic 80/2: 2 sets; Telescopic 80/3: 3 sets

	Item No.
Junior 80/Z	940.80.001

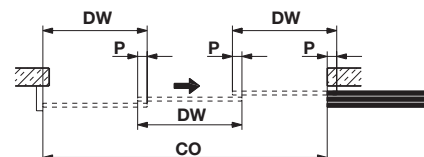
Order Specifications

- Qty. and type of Telescopic fitting sets
- Qty. of Jr. 80/Z sets
- Length of upper track

Door width (DW) calculation



$$\text{2-panel: } DW = \frac{(2 \times P) + CO}{2}$$





$$\text{3-panel: } DW = \frac{(3 \times P) + CO}{3}$$

Upper track length calculation:
80/2 $L = CO + DW$
80/3 $L = CO + DW$

DW = Door width
CO = Clear opening
P = Overlap

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
	Guide rail	Plastic	black	6 m (19' 8 1/4")	940.80.600
				1.3 m (4' 3 1/8")	940.41.130

Installation Plan (included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides	page 1.198
Lower guide channel	page 1.200

Dimensional data not binding. We reserve the right to alter specifications without notice.