

HAWA Junior 80/B Set

- For 1 sliding door without upper track and lower guide

Item No.
940.80.047



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	940.80.012
	Carrier profile with suspension plates, M10 bolt and set screw	–	–	2 pcs.	940.80.024
	End caps for carrier profile	Plastic	anthracite	2 pcs.	942.56.029
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention spring	Zinc die-cast	–	2 pcs.	940.80.040
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Locking wrench for suspension plate	Steel	galvanized	1 pc.	940.80.092

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
Depending on application, an additional track stopper has to be ordered with set. For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130
	Assembly wedge, for doors running in the ceiling (2 pcs. per sliding door)	–	–	–	940.80.050
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021

Confort guides	page 1.198
Angle profile	page 1.196
Other lower guide options	page 1.199
SoundEx bracket	page 1.197
Soft close	page 1.195

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.



Dimensions in mm
Inches are approximate

HAWA Junior 80/Inox Set

- For 1 sliding door without upper track and bottom guide channel

Item No.
940.80.003



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	940.81.012
	One-way suspension plate, M10 bolt	Stainless Steel	–	2 pcs.	940.81.028
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention inox-type nylon	–	–	1 pc.	940.80.042
	Wall buffer	Rubber	black	1 pc.	940.40.051

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130
	Assembly wedge, for doors running in the ceiling (2 pcs. per sliding door)	–	–	–	940.80.050
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021

Installation Plan (included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides	page 1.198
Angle profile	page 1.196
Other lower guide options	page 1.199
SoundEx bracket	page 1.197
Soft close	page 1.195

HAWA Junior 120/B Set

- For 1 sliding door without upper track and lower guide channel

Item No.
941.20.009



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	941.20.100
	Carrier profile with suspension plates, M12 bolt and set screw	–	–	2 pcs.	941.20.024
	End caps for carrier profile	Plastic	anthracite	2 pcs.	942.56.029
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention spring	–	–	1 pc.	941.20.041
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Locking wrench for suspension plate	Steel	galvanized	1 pc.	941.20.091

Note

Item numbers are valid only for 1 piece, when ordering individual components, please state the desired amount.
Depending on application an additional track stopper has to be ordered with set. For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	3 m (9' 10 1/8")	941.20.300
				4 m (13' 1 1/2")	941.20.400
				6 m (19' 8 1/4")	941.20.600
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130
	Assembly wedge for doors running in the ceiling (2 pcs. per sliding door)	–	–	–	940.80.050
	Cover cap to upper track	Zinc die-cast	chrome matt	–	941.20.029

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides	page 1.198
Other lower guide options	page 1.199
Angle profile	page 1.196
SoundEx bracket	page 1.197


Dimensions in mm
Inches are approximate

HAWA Silenta 150/B Set

- For 1 sliding door without upper track and lower guide channel

Item No.
942.30.001




Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	942.30.015
	Carrier profile with suspension plates, M12 bolt and set screw	–	–	2 pcs.	941.20.024
	End caps for carrier profile	Plastic	anthracite	2 pcs.	942.56.029
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	941.60.031
	Track stopper with adjustable retention spring	–	–	1 pc.	942.30.042
	Wall buffer	Rubber	black	1 pc.	941.60.051
	Locking wrench for suspension plate	Steel	galvanized	1 pc.	941.20.091

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	2.5 m (8' 2 7/16")	942.30.250
				3.5 m (11' 5 13/16")	942.30.350
				6 m (19' 8 1/4")	942.30.600
	Guide rail, glue-in type	Plastic	black	3 m (9' 10 1/8")	941.61.130
	Assembly wedge for doors running in the ceiling (2 pcs. per sliding door)	–	–	–	940.80.050

Installation Plan


(Included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides	page 1.198
Other lower guide options	page 1.199


Dimensional data not binding. We reserve the right to alter specifications without notice.

HAWA SoundEx


- Absorbs and reduces the transmission of structure-borne sound from a sliding system to a building
- Utilized in combination with the Junior series sliding hardware systems




Track hole spacing:

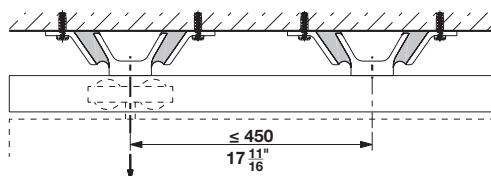


L = Track hole spacing




Junior 40

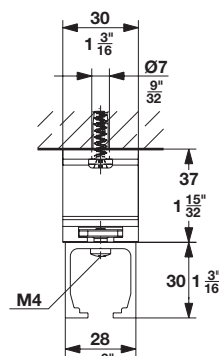

Junior 80

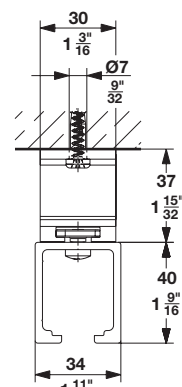

Junior 120

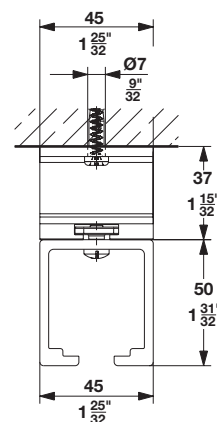

Sound-Absorbing Brackets

Material: Aluminum die-cast, Rubber; Color: black






Version	Item No.
Junior 40	940.40.069
Junior 80	940.80.069
Junior 120	941.20.069

Supplied With

Fixing part topper track

HAWA Assembly Wedge

- Used in conjunction with Junior 80/B, Junior 120/B and Silenta 150/B
- For mounting of sliding doors that are recessed into the ceiling
- Allows sliding doors to be hung and removed from track without dismantling the door jambs or trim

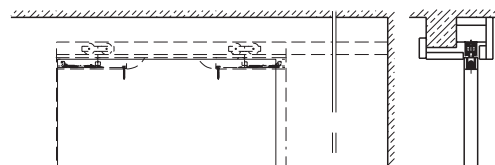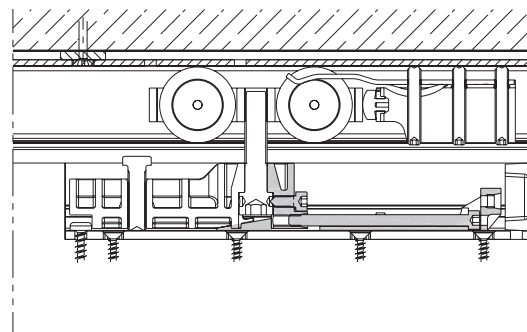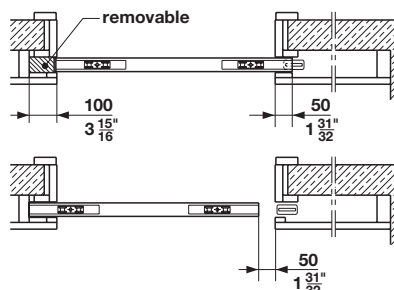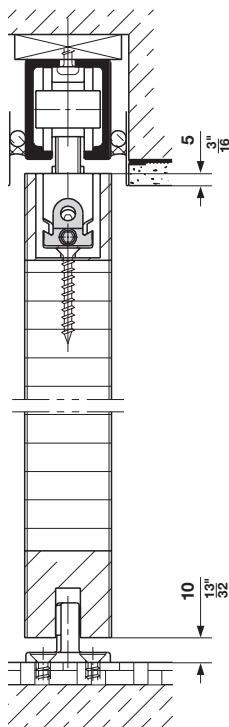

Mounting Information

- When used for a pocket door application either the cover panel has to be designed so it can be removed or a removable 100 mm (4") wide stop strip has to be mounted on the lock side.
- The sliding door should only reach 5 mm (3/16") into the ceiling or the top jamb
- When closed, the sliding door should not protrude more than 50 mm (1 31/32") into the pocket

Item No.
940.80.050



Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

Dimensions in mm
Inches are approximate

HAWA Assembly Wedge

- Used in conjunction with Junior 80/G and Junior 120/G
- For mounting of sliding doors that are recessed into the ceiling
- Allows sliding doors to be hung and removed from track without dismantling the door jambs or trim

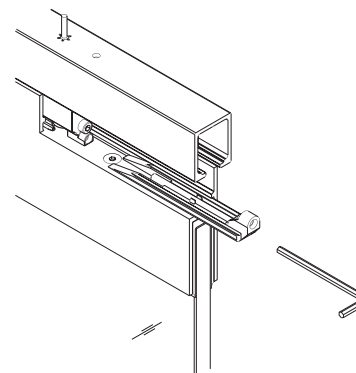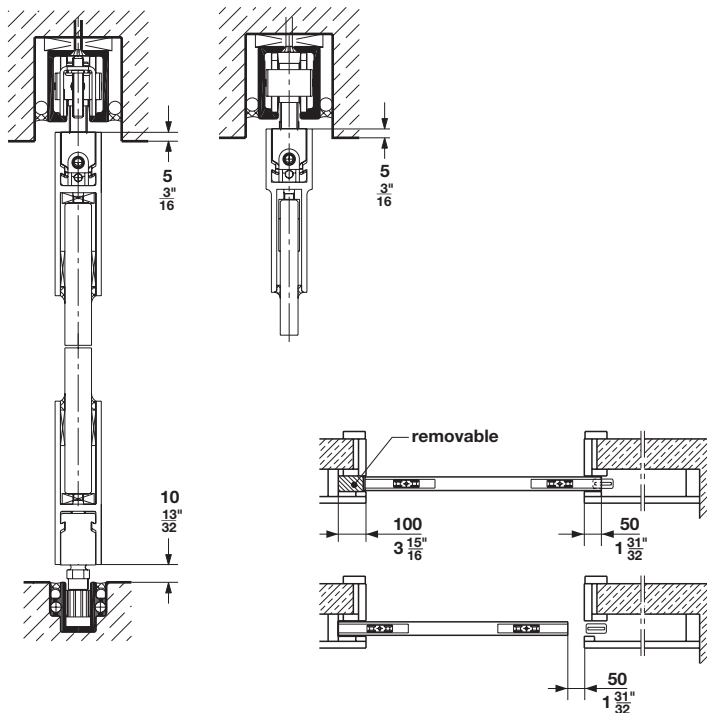



Mounting Information

- When used for a pocket door application either the cover panel has to be designed so it can be removed or a removable 100 mm (4") wide stop strip has to be mounted on the lock side.
- The sliding door should only reach 5 mm (3/16") into the ceiling or the top jamb
- When closed, the sliding door should not protrude more than 50 mm (2") into the pocket

Item No.
940.80.050

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

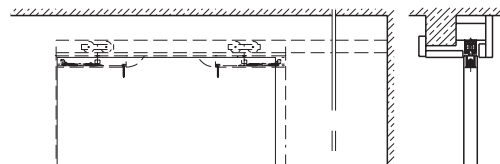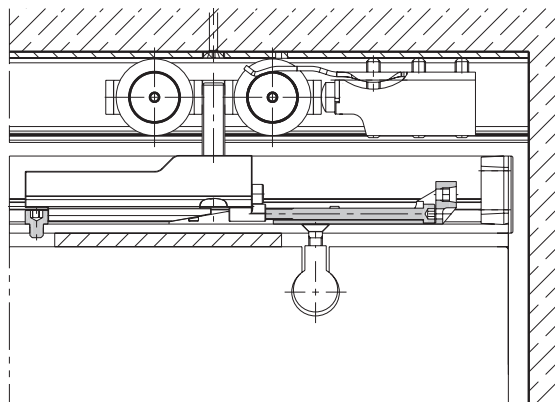

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate