

HAWA Junior 80/Z Set

- For 1 sliding door without upper track and lower guide

Item No.
940.80.001



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	940.80.012
	Two-way suspension plate, M10 bolt and mounting screws	–	–	2 pcs.	940.80.022
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention spring	Zinc die-cast	–	1 pc.	940.80.040
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Height adjusting pin	Steel	galvanized	1 pc.	940.40.091

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
Depending on application, an additional track stopper has to be ordered with set. For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides	page 1.198
Angle profile	page 1.196
Other lower guide options	page 1.199
Futura framing kit	pages 1.189–1.191
SoundEx bracket	page 1.197
Soft close	page 1.195

Complete Sets

Door panel width	Track length	Item No.
up to 70 cm (27 9/16")	1.4 m (4' 7 1/8")	407.59.144
up to 80 cm (31 1/2")	1.6 m (5' 3")	407.59.162
up to 90 cm (35 7/16")	1.8 m (5' 10 7/8")	407.59.180
up to 100 cm (39 3/8")	2 m (6' 6 3/4")	407.59.206
up to 110 cm (43 5/16")	2.2 m (7' 2 5/8")	407.59.224
up to 125 cm (49 3/16")	2.5 m (8' 2 7/16")	407.59.251

Supplied With

Upper track	Running gear
Two-way suspension plates	Track stopper
Guide	Rubber bumper
Height adjusting pin	

Dimensions in mm
Inches are approximate

HAWA Junior 80/B Set

- For 1 sliding door without upper track and lower guide

Item No.
940.80.047



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	940.80.012
	Carrier profile with suspension plates, M10 bolt and set screw	–	–	2 pcs.	940.80.024
	End caps for carrier profile	Plastic	anthracite	2 pcs.	942.56.029
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention spring	Zinc die-cast	–	2 pcs.	940.80.040
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Locking wrench for suspension plate	Steel	galvanized	1 pc.	940.80.092

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
Depending on application, an additional track stopper has to be ordered with set. For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130
	Assembly wedge, for doors running in the ceiling (2 pcs. per sliding door)	–	–	–	940.80.050
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021

Confort guides	page 1.198
Angle profile	page 1.196
Other lower guide options	page 1.199
SoundEx bracket	page 1.197
Soft close	page 1.195

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

Dimensions in mm
Inches are approximate

HAWA Junior 80/B (mod.) Set

- For 1 sliding door without upper track and lower guide

Version	Item No.
M10 bolt	940.80.004
20 mm (25/32") M10 bolt	940.80.118



Set Components

	Description	Material	Finish	Qty./Set		Item No.
				940.80.004	940.80.118	
	Double roller running gear	Aluminum	–	2 pcs.	2 pcs.	940.80.012
	Carrier profile with suspension plate, M10 bolt	–	–	2 pcs.	–	940.80.030
	Carrier profile with suspension plate and 20 mm (25/32") extended M10 bolt	–	–	–	2 pcs.	940.80.031
	Track stopper with adjustable retention spring	Zinc die cast	–	2 pcs.	2 pcs.	940.80.040
	Wall buffer	Rubber	black	1 pc.	1 pc.	940.40.051
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	1 pc.	940.40.031

Note

Order upper tracks separately. For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021

Confort guides	page 1.198
Angle profile	page 1.196
Sliding door locks	pages 1.357, 1.364-1.368
Flush Pulls	pages 1.363, 1.371-1.373
SoundEx bracket	page 1.197
Soft close	page 1.195
Pull handles	pages 2.10-2.32



Dimensions in mm
Inches are approximate

HAWA Junior 80/Inox Set

- For 1 sliding door without upper track and bottom guide channel

Item No.
940.80.003



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	940.81.012
	One-way suspension plate, M10 bolt	Stainless Steel	–	2 pcs.	940.81.028
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention inox-type nylon	–	–	1 pc.	940.80.042
	Wall buffer	Rubber	black	1 pc.	940.40.051

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130
	Assembly wedge, for doors running in the ceiling (2 pcs. per sliding door)	–	–	–	940.80.050
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021

Installation Plan (included in fitting set), mounting instructions for planning and execution available upon request.




Confort guides	page 1.198
Angle profile	page 1.196
Other lower guide options	page 1.199
SoundEx bracket	page 1.197
Soft close	page 1.195

HAWA Telescopic 40/4 Set

- Supplementary fitting set for 4 sliding doors

	Item No.
	940.41.002

Set Components

	Description	Material	Finish	Qty.	Item No.
	Driver, wide	Aluminum	silver colored anodized	2 pcs.	947.00.050
	Guide pulley wheel long, with screws	–	–	2 pcs.	947.00.048
	Guide pulley wheel short, with screws	–	–	2 pcs.	947.00.049
	Toothed belt mounting device for ceiling/wall mounting, complete		–	2 pcs.	947.00.053
	Toothed belt, 2.7 m (8' 10 5/16")	Glass-fiber reinforced	black	2 pcs.	947.00.054
	Toothed belt, 10 m (32' 9 11/16")	Glass-fiber reinforced	black	1 pc.	947.00.037
	Driver counter-plate, wide	–	–	2 pcs.	947.00.051
	Floor guide - Confort 120 - Telescopic	Plastic	–	2 pcs.	940.40.070
	Deflection roller with end stops	–	–	2 pcs.	940.80.086
	Clamping element for fastening ends of toothed belt	–	–	1 pc.	947.00.055
	Clamping element for fastening continuous toothed belt	–	–	1 pc.	947.00.056

Note



In addition, 4 sets of HAWA Junior 80/Z must be ordered with each Telescopic 40/4 fitting set.

	Item No.
Junior 80/Z	940.80.001

Order specifications

- Qty. of Telescopic 40/4 fitting sets
- Qty. of Jr. 80/Z sets
- Length of upper track

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
	Guide rail	Plastic	black	6 m (19' 8 1/4")	940.80.600
				1.3 m (4' 3 1/8")	940.41.130

Installation Plan (included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides page 1.198



Dimensions in mm
Inches are approximate

HAWA Telescopic 80/2 and 80/3 Sets

- For 2 or 3 door without upper track and lower guide channel

Version	Item No.
For 2 doors	940.81.007
For 3 doors	940.81.008

Set Components

	Description	Material	Finish	2 doors Qty.	3 doors Qty.	Item No.
	Driver, wide	Aluminum	silver colored anodized	1 pc.	2 pcs.	947.00.050
	Guide pulley wheel long, with screws	–	–	1 pc.	2 pcs.	947.00.048
	Guide pulley wheel short, with screws	–	–	1 pc.	2 pcs.	947.00.049
	Toothed belt mounting device for ceiling/wall mounting, complete	–	–	1 pc.	1 pc.	947.00.053
	Toothed belt, 2.7 m (8' 10 5/16")	Glass-fiber reinforced	black	1 pc.	2 pcs.	947.00.054
	Driver counter-plate, wide	–	–	1 pc.	1 pc.	947.00.051
	Floor guide - Confort 120 - Telescopic	Plastic	–	1 pc.	1 pc.	940.40.070
	Lower guide	Plate: Steel Slider: Plastic	–	–	1 pc.	943.04.030
	Driver, narrow	–	–	–	1 pc.	947.00.052

Note


In addition, HAWA Junior 80/Z fitting sets have to be ordered separately as follows:
Telescopic 80/2: 2 sets; Telescopic 80/3: 3 sets

	Item No.
Junior 80/Z	940.80.001

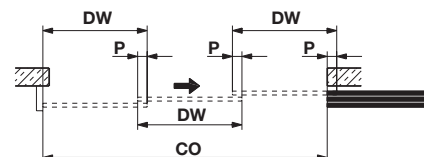
Order Specifications

- Qty. and type of Telescopic fitting sets
- Qty. of Jr. 80/Z sets
- Length of upper track

Door width (DW) calculation



$$\text{2-panel: } DW = \frac{(2 \times P) + CO}{2}$$





$$\text{3-panel: } DW = \frac{(3 \times P) + CO}{3}$$

Upper track length calculation:
80/2 $L = CO + DW$
80/3 $L = CO + DW$

DW = Door width
CO = Clear opening
P = Overlap

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
	Guide rail	Plastic	black	6 m (19' 8 1/4")	940.80.600
				1.3 m (4' 3 1/8")	940.41.130

Installation Plan (included in fitting set), mounting instructions for planning and execution available upon request.

Confort guides	page 1.198
Lower guide channel	page 1.200

Dimensional data not binding. We reserve the right to alter specifications without notice.

HAWA Symmetric 80/Z Set

- For bi-parting sliding doors without upper track and lower guide channel

Item No.
940.81.009


Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	4 pcs.	940.80.012
	Two-way suspension plate M10 bolt and mounting screws	Aluminum	silver colored anodized	4 pcs.	940.80.022
	Floor mounted guide, rattle-free	Plastic	black	2 pcs.	940.40.031
	Track stopper with adjustable retention spring	–	–	1 pc.	940.80.040
	Height adjusting pin	Steel	–	1 pc.	940.40.091
	Deflection roller with end stops	–	–	2 pcs.	940.80.086
	Clamping element for fastening ends of the toothed belt	–	–	1 pc.	947.00.055
	Clamping element for fastening continuous toothed belt	–	–	1 pc.	947.00.056
	Toothed belt 10 m (32" 11/16")	Glass-fiber reinforced	black	1 pc.	947.00.037
	Door stop, screw-on	Rubber	black	2 pcs.	940.40.051

Note

Item numbers are valid only for 1 piece, when ordering individual components, please state the desired amount.
The toothed belt (length 10 m) is calculated for 2 sliding doors having a maximum width of 1200 mm (3' 11 1/4") each.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Guide rail	Plastic	black	1.3 m (4' 3 1/8")	940.41.130
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	940.80.021
	Door stop, floor mounted	Aluminum	chrome-plated, matt	–	940.40.052

Calculating the upper
track length (L):
L = CO x 2 + 120 mm
(4 3/4")
CO = Clear opening

Confort guides	page 1.198
Angle profile	page 1.196

Dimensions in mm
Inches are approximate

HAWA Bifold 30 Set

- Without upper track and lower guide channel

Description	Item No.
2 panel	407.58.003
4 panel	407.58.004
6 panel	407.58.006

Set Components

	Description	Material	Finish	2 panel Qty.	4 panel Qty.	6 panel Qty.	Item No.
	Double roller running gear	Wheels: Nylon	-	1 pc.	2 pcs.	3 pcs.	940.80.012
	Suspension plate, M10 bolt and mounting screws	-	-	2 pcs.	3 pcs.	4 pcs.	407.58.030
	Upper pivot, M10	-	-	1 pc.	1 pc.	1 pc.	407.58.010
	Lower pivot, M8	-	-	1 pc.	1 pc.	1 pc.	407.58.012
	Butt hinge	Steel	galvanized	3 pcs.	9 pcs.	15 pcs.	407.78.989
	Height adjusting pin	Steel	galvanized	1 pc.	1 pc.	1 pc.	940.40.091
	Stop bracket	-	-	1 pc.	2 pcs.	3 pcs.	407.58.020
	Lower guide plate, with plastic slider	-	-	-	2 pcs.	3 pcs.	943.04.030

Note



For a 4 panel opening where 2 panels fold to the left and 2 panels fold to the right side of the opening, please order 2 sets of the 2 panel set. Butt hinges included in fitting set are for a maximum panel height of 2.2 m (7' 2 5/8"), order additional hinges based on the chart below.

Individual Components

Order specifications:

- Width of sliding door
- Type of set, left or right

up to 2.2 m (7' 2 5/8")	=	3
up to 2.7 m (8' 10 5/16")	=	4
up to 3.2 m (10' 6")	=	5

	Description	Material	Finish	Length	Item No.
	Upper tracks, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
	Butt hinge	Steel, galvanized	zinc-plated	-	407.78.989
			nickel-plated, dull-brushed	-	407.78.685
			brass-plated, dull-brushed	-	407.78.881
	Lower guide channel, pre-drilled 20 x 20 mm (25/32" x 25/32")	Aluminum	clear anodized	2.5 m (8' 2 7/16")	941.00.925
				6 m (19' 8 1/4")	941.00.960

Installation Plan

(included in fitting set), mounting instructions for planning and execution available upon request.

Dimensions in mm
Inches are approximate

HAWA Junior 80/GS


Set

- For 1 sliding door without upper track and lower guide channel

	Item No.
	940.81.000

Supplied With
Mounting instructions



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	940.80.012
	Suspension bolt, M10	–	–	2 pcs.	941.00.072
	Clamp shoe, adjustable from 6 – 12.7 (1/4" – 1/2")	Aluminum	–	2 pcs.	941.00.020
	Track stopper with adjustable retention spring	–	–	2 pcs.	940.80.040
	Floor guide, adjustable from 6 – 12.7 (1/4" – 1/2")	–	–	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	407.01.930

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Gliders, self adhesive, for 8 mm (5/16") thick glass	Plastic	–	–	940.40.033
	Gliders, self adhesive, for 10 mm (13/32") thick glass	Plastic	–	–	940.40.034
	Lower guide channel, 20 x 20 mm (25/32" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.925
	Lower guide channel, 20 x 20 mm (25/32" x 25/32")			6 m (19' 8 1/4")	941.00.960

Angle profile	page 1.288
Toplock	pages 1.352-1.356
Clip-on fascias and end caps to clamp shoe	page 1.219
Floor mounted door stop	page 1.290
Glass edge protection profiles	page 1.291
Soft close	page 1.287

HAWA Junior 80/GP

Set




- For 1 sliding door without upper track and lower guide channel

	Item No.
	940.81.006

Supplied With

Mounting instructions


Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	940.80.012
	Suspension bolt, M10 including mounting screws	–	–	2 pcs.	940.81.023
	Patch suspension	–	–	2 pcs.	940.40.038
	Track stopper with adjustable retention spring	–	–	1 pc.	940.80.040
	One-way drilling jig	–	–	1 pc.	940.40.089
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Height adjusting pin	–	–	1 pc.	940.40.090

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600

Angle profile	page 1.288
Toplock	pages 1.352-1.356
Floor mounted door stop	page 1.290
Glass edge protection profiles	page 1.291
Soft close	page 1.287
Fixed glass panel for 80/GP	pages 1.260-1.261

Dimensions in mm
Inches are approximate

HAWA Junior 80/G

Set

- For 1 sliding door without upper track and lower guide channel

Item No.
940.84.007

Supplied With
Mounting instructions


Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Wheels: Nylon	–	2 pcs.	940.80.012
	Suspension block with bolt, M10	Aluminum	silver colored anodized	2 pcs.	940.80.019
	Track stopper with adjustable retention spring	–	–	2 pcs.	940.80.040
	Cover Cap, for support profile	Plastic	anthracite	2 pcs.	942.56.029
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Locking wrench to suspension plate	Steel	–	1 pc.	940.80.092

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Support and glass suspension profile, glass thickness 8 – 10 mm (3/16" – 13/32")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.765
	Cover for glass suspension, profile glass thickness of 8 – 10 mm (3/16" – 13/32")	Plastic	anthracite	–	942.44.060
	Support and glass suspension profile, glass thickness 12 – 16 mm (15/32" – 5/8")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.865
	Cover for glass suspension, profile glass thickness of 12 – 16 mm (15/32" – 5/8")	Plastic	anthracite	–	942.44.061
	Glass holder, for glass thickness 8, 10, 12, 12.7, 14 and 16 mm. (5/16", 13/32", 15/32", 1/2", 9/16", 5/8") (4 pcs. required for each support and glass suspension profile)	Plastic	–	–	940.84.024
	Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")	Steel	chrome-plated matt	–	940.40.032
	Floor mounted door stop 57 x 28 x 39 mm (2 1/4" x 1 1/8" x 1 9/16")	Aluminum	chrome-plated matt	–	940.40.052
	Floor guide, for bottom support and glass suspension profile	Plastic	–	–	940.84.037
	Guide track, 31 x 28 mm (1 1/4" x 1 1/8"), pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Guide piece, with zero clearance, 14 mm (9/16"), with carriage	Plastic	–	–	946.12.060

Dimensions in mm
Inches are approximate

HAWA Junior 80/M Set

- For a single sliding glass door without upper track and lower guide channel

1

	Item No.
	940.84.012

Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	940.80.012
	Suspension plate with bolt, M10	Steel	galvanized	2 pcs.	940.81.027
	Track stopper with adjustable retention spring	-	-	2 pc.	940.80.040
	Lower guide, floor mounted	Plastic	gray	1 pc.	942.44.030
	Buffer, screw-mounted	Rubber	black	1 pc.	940.40.051

Note

Item numbers are valid only for 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting metal sliding doors please order 2 sets. Lower guide channel and upper track have to be ordered separately. Installation plan for planning and execution available upon request.

Individual Components

	Description	Material	Finish	Length	Item No.
	Lower guide channel, 20 x 20 x 3 mm (13/16" x 13/16" x 1/8")	Aluminum	anodized	6 m (19' 8 1/4")	941.00.960
				2.5 m (8' 2 7/16")	941.00.925
	Lower guide channel, pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Connecting pin, notched	Steel	galvanized		946.12.090
	Upper Tracks, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600

Dimensional data not binding. We reserve the right to alter specifications without notice.