

**HAWA Junior 80/G**

**Set**

- For 1 sliding door without upper track and lower guide channel

	Item No.
	940.84.007

**Supplied With**

Mounting instructions


**Set Components**

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear		Wheels: Nylon	–	2 pcs. 940.80.012
	Suspension block with bolt, M10	Aluminum	silver colored anodized	2 pcs.	940.80.019
	Track stopper with adjustable retention spring		–	–	2 pcs. 940.80.040
	Cover Cap, for support profile	Plastic	anthracite	2 pcs.	942.56.029
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Locking wrench to suspension plate	Steel	–	1 pc.	940.80.092

**Note**

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

**Individual Components**

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Support and glass suspension profile, glass thickness 8 – 10 mm (3/16" – 13/32")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.765
	Cover for glass suspension, profile glass thickness of 8 – 10 mm (3/16" – 13/32")	Plastic	anthracite	–	942.44.060
	Support and glass suspension profile, glass thickness 12 – 16 mm (15/32" – 5/8")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.865
	Cover for glass suspension, profile glass thickness of 12 – 16 mm (15/32" – 5/8")	Plastic	anthracite	–	942.44.061
	Glass holder, for glass thickness 8, 10, 12, 12.7, 14 and 16 mm. (5/16", 13/32", 15/32", 1/2", 9/16", 5/8") (4 pcs. required for each support and glass suspension profile)	Plastic	–	–	940.84.024
	Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")	Steel	chrome-plated matt	–	940.40.032
	Floor mounted door stop 57 x 28 x 39 mm (2 1/4" x 1 1/8" x 1 9/16")	Aluminum	chrome-plated matt	–	940.40.052
	Floor guide, for bottom support and glass suspension profile	Plastic	–	–	940.84.037
	Guide track, 31 x 28 mm (1 1/4" x 1 1/8"), pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Guide piece, with zero clearance, 14 mm (9/16"), with carriage	Plastic	–	–	946.12.060

Dimensions in mm  
Inches are approximate

**HAWA Telescopic 80/G Set**

- For 2 sliding doors, without running track and floor guide

	Item No.
	940.80.090

**Set Components**

	Description	Material	Finish	Length	Qty.	Item No.
	Double roller running gear	Aluminum	–	–	4 pcs.	940.80.012
	Suspension block, including M10 bolt and clamping screw	Aluminum	silver colored anodized	–	4 pcs.	940.80.018
	Track stopper with adjustable retention spring	–	–	–	2 pcs.	940.80.040
	Cover Cap, for glass suspension profile	Plastic	anthracite	–	8 pcs.	942.56.029
	Glass holder, for glass thickness 8, 10, 12, 12.7, 14 and 16 mm (5/16", 13/32", 15/32", 1/2", 9/16", 5/8") (4 pcs. required for each support and glass suspension profile)	Plastic	–	–	8 pcs.	940.84.024
	Deflection roller, with long mounting plate	–	–	–	1 pc.	947.00.048
	Deflection roller, with short mounting plate	–	–	–	1 pc.	947.00.049
	Follower, wide	Aluminum	silver colored anodized	–	1 pc.	947.00.050
	Toothed belt, glass-fiber reinforced	–	black	2.7 m (8' 10 5/16")	1 pc.	947.00.054
	Clamp for wall mounting/ceiling installation, for toothed belt, complete	–	–	–	1 pc.	947.00.053
	Driver counter plate, wide	–	–	–	1 pc.	947.00.051
	Suspension block	–	–	–	3 pcs.	940.80.016
	Wall buffer	Rubber	black	–	1 pcs.	940.40.051
	Guide, complete	–	–	–	1 pc.	940.80.091
	Floor guide, for bottom support and glass suspension profile	Plastic	–	–	1 pc.	940.84.037

**Note**

Tracks and glass suspension profile. Refer to Junior 80/G page **1.254**. Please order separately.

Pull handles	pages 2.10-2.32
Toplock	pages 1.352-1.356
Flush pulls	pages 1.363, 1.371-1.373

**HAWA Junior 120/G**

**Set**

- For 1 sliding door without upper track and lower guide channel

	Item No.
	941.20.011


**Set Components**

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Wheels: Nylon	–	2 pcs.	941.20.100
	Suspension bolt with bolt, M12	–	–	2 pcs.	941.20.025
	Track stopper with adjustable retention spring	–	–	2 pcs.	941.20.041
	Cover cap, for glass suspension profile	Plastic	anthracite gray	–	942.56.029
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Locking wrench to suspension plate	Steel	–	1 pc.	941.20.091

**Note**

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting doors order 2 sets.

**Individual Components**

	Description	Material	Finish	Length/Qty	Item No.
	Upper tracks, pre-drilled	Aluminum	clear anodized	3 m (9' 10 1/8")	941.20.300
				4 m (13' 1 1/2")	941.20.400
				6 m (19' 8 1/4")	941.20.600
	Cover cap, for upper track	Zinc die-cast	chrome matt	–	941.20.029
	Support and glass suspension profile, glass thickness 8 – 10 mm (3/16" – 13/32")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.765
	Cover for glass suspension, profile glass thickness of 8 – 10 mm (3/16" – 13/32")	Plastic	anodized	–	942.44.060
	Support and glass suspension profile, glass thickness 12 – 16 mm (15/32" – 5/8")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.865
	Cover for glass suspension, profile glass thickness of 12 – 16 mm (15/32" – 5/8")	Plastic	anodized	–	942.44.061
	Glass holder, for glass thickness 8, 10, 12, 12.7, 14 and 16 mm (3/16", 13/32", 15/32", 1/2", 9/16", 5/8") (4 pcs. required for each support and glass suspension profile)	Aluminum	anodized	–	940.84.024
	Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")	Steel	chrome-plated matt	–	940.40.032
	Floor mounted door stop 57 x 28 x 39 mm (2 1/4" x 1 1/8" x 1 9/16")	Aluminum	chrome-plated matt	–	940.40.052
	Floor guide, for bottom support and glass suspension profile	–	–	1 pc.	940.84.037
	Guide track, 31 x 28 mm (1 1/4" x 1 1/8"), pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Guide piece, with zero clearance, 14 mm (9/16"), with carriage	Plastic	–	–	946.12.060
	Lower guide channel, 20 x 20 x 3 mm (13/16" x 13/16" x 1/8")	Aluminum	anodized	6 m (19' 8 1/4") 2.5 m (8' 2 7/16")	941.00.960 941.00.925
	Lower guide	Aluminum	anodized	–	940.84.033

Dimensional data not binding. We reserve the right to alter specifications without notice.

Angle profile	page 1.288
Assembly wedge	page 1.289
Locks	page 1.357
Finishes	page 1.286

Dimensions in mm  
Inches are approximate

**HAWA Junior 160/G**

**Set**




- For 1 sliding door without track

	Item No.
	941.60.009

**Supplied With**

Mounting instructions







**Set Components**

	Description	Material	Finish	Qty	Item No.
	Double roller running gear with M14 bolt	Wheels: Nylon	–	2 pcs.	941.60.014
	Suspension plate with M14 thread	–	–	2 pcs.	941.60.025
	Track stopper with adjustable retention spring	–	–	2 pcs.	941.60.041
	Cover cap, for support profile	Plastic	anthracite	2 pcs.	942.56.029
	Wall buffer	Rubber	black	1 pc.	941.60.051

**Note**

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

**Individual Components**

	Description	Material	Finish	Length/Qty	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	3 m (9' 10 1/8")	941.60.301
				4 m (13' 1 1/2")	941.60.401
				6 m (19' 8 1/4")	941.60.601
	Support and glass suspension profile, glass thickness 8 – 10 mm (3/16" – 13/32")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.765
	Cover for glass suspension, profile glass thickness of 8 – 10 mm (3/16" – 13/32")	Plastic	anodized	–	942.44.060
	Support and glass suspension profile, glass thickness 12 – 16 mm (15/32" – 5/8")	Aluminum	anodized	6.5 m (21' 3 7/8")	942.56.865
	Cover for glass suspension, profile glass thickness of 12 – 16 mm (15/32" – 5/8")	Plastic	anodized	–	942.44.061
	Glass holder, for glass thickness 8, 10, 12, 12.7, 14 and 16 mm (5/16", 13/32", 15/32", 1/2", 9/16", 5/8") (4 pcs. required for each support and glass suspension profile)	Aluminum	anodized	–	940.84.024
	Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")	Steel	chrome-plated matt	–	940.40.032
	Floor mounted door stop 57 x 28 x 39 mm (2 1/4" x 1 1/8" x 1 9/16")	Aluminum	chrome-plated matt	–	940.40.052
	Floor guide, for bottom support and glass suspension profile	–	–	1 pc.	940.84.037
	Guide track, 31 x 28 mm (1 1/4" x 1 1/8"), pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Guide piece, with zero clearance, 14 mm (9/16"), with carriage	Plastic	–	–	946.12.060

Dimensional data not binding. We reserve the right to alter specifications without notice.

Locks	page 1.357
Finishes	page 1.286

Dimensions in mm  
Inches are approximate

**HAWA Junior 250/G**

**Set**

- For 1 sliding door without upper track and lower guide

	Item No.
	942.56.003

**Supplied With**

Mounting instructions

**Set Components**

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	–	2 pcs.	942.56.012
	Suspension block including M12 and clamping screw	Zinc alloy	–	2 pcs.	942.56.023
	Track stopper with adjustable retention spring	–	–	2 pcs.	942.56.041
	Cover cap, for glass suspension profile	Plastic	anthracite	2 pcs.	942.56.029
	Wall buffer	Rubber	black	1 pc.	941.60.051
	Wrench, for suspension block	Aluminum	clear anodized	1 pc.	940.40.092

**Note**

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

**Individual Components**

	Description	Area of application	Material	Finish	Length/Qty	Item No.
	Upper track, pre-drilled		Aluminum	anodized	4 m (13' 1 1/2") 6 m (19' 8 1/4")	942.56.940 942.56.960
	Connecting pin set for upper track		–	–	–	942.56.091
	Support and glass suspension profile, glass thickness 8 – 10 mm (3/16" – 13/32")		Aluminum	anodized	6 m (19' 8 1/4")	942.56.765
	Cover for glass suspension, profile glass thickness of 8 – 10 mm (3/16" – 13/32")		Plastic	anthracite	–	942.44.060
	Support and glass suspension profile, glass thickness 12 – 16 mm (15/32" – 5/8")		Aluminum	anodized	6 m (19' 8 1/4")	942.56.865
	Cover for glass suspension, profile glass thickness of 12 – 16 mm (15/32" – 5/8")		Plastic	anthracite	–	942.44.061
	Glass holder, for glass thickness 8, 10, 12, 12.7, 14 and 16 mm (5/16", 13/32", 15/32", 1/2", 9/16", 5/8") (4 pcs. required for each support and glass suspension profile)		Plastic	–	–	940.84.024
	Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")	Floor guide version 1	Steel	chrome plated matt	–	940.40.032
	Floor guide, for bottom support and glass suspension profile	– Floor guide version 2	–	–	1 pc.	940.84.037
	Guide track, 31 x 28 mm (1 1/4" x 1 1/8"), pre-drilled	Floor guide version 3	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Guide piece, with zero clearance, 14 mm (9/16"), with suspension block	Floor guide version 3	Aluminum	anodized	–	946.12.060
	Connecting pin, for guide channel (Order 2 pcs. for each guide track connection)	Floor guide version 3	Steel	galvanized	–	946.12.090

Pull handles	pages 2.10-2.32
Door seals and accessories	page 1.290
Sliding door locks	pages 1.357, 1.364-1.367

Dimensions in mm  
Inches are approximate

**HAWA Super 250/G**

**Individual Components**

**Order Specifications**

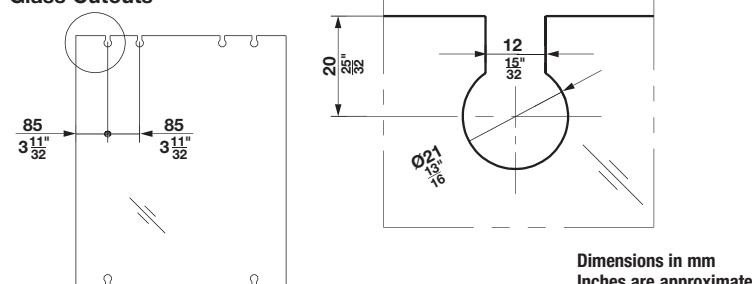
- Upper track
- Type of lower guide or guide channel
- Door width
- Glass thickness
- Door weight
- Number of running gears (2 per door)
- Number of suspension plates (2 per door)
- Number of track stoppers (2 per door)

	Description	Material	Finish	Length/Qty	Item No.
	Upper track, side-drilled	Steel	stainless	6 m (19' 8 1/4")	942.42.601
	Upper track, with mounting flanges	Steel	stainless	6 m (19' 8 1/4")	942.43.601
	Lower guide channel, pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Connecting pin, notched	Steel	galvanized	—	946.12.090
	Lower guide, with plastic slider and suspension block	—	—	—	946.12.060
	Lower guide, rattle-free, for 8, 10, 12 and 12.7 mm (5/16", 13/32", 15/32" and 1/2") thick glass	—	—	—	940.40.032
	Floor guide, for bottom support and glass suspension profile	—	—	1 pc.	940.84.037
	Glass suspension profile 'G', 8 – 16 mm (5/16" – 5/8")	Aluminum	anodized unanodized	6.5 m (21' 3 15/16")	942.56.865 942.44.023
	Cover cap for glass suspension/retainer profile	Plastic	anthracite gray	—	942.44.061
	Running gear	Wheels: Steel	—	—	942.44.012
	Suspension plate, with suspension bolt M12	—	—	—	942.44.020
	Track stopper, to be drilled into upper track	Steel	galvanized	—	942.42.041
	Buffer, screw-on type	Rubber	black	—	941.60.051
	Cover cap, for glass suspension profile	Plastic	anthracite gray	—	942.56.029
	Glass holder insert, with M6 x 30 mm (1 3/16") screw	Plastic	—	—	940.84.024

**Installation Plan**

(included in fitting set), mounting instructions for planning and execution available upon request.

**Glass Cutouts**





Locks	page 1.357
Glass edge protection profile	page 1.291
Finishes	page 1.286

**HAWA Super 400/G**

**Individual Components**

**Order Specifications**

- Upper track
- Type of lower guide or guide channel
- Door width
- Glass thickness
- Door weight
- Number of running gears (2 per door)
- Number of suspension plates (2 per door)
- Number of track stoppers (2 per door)

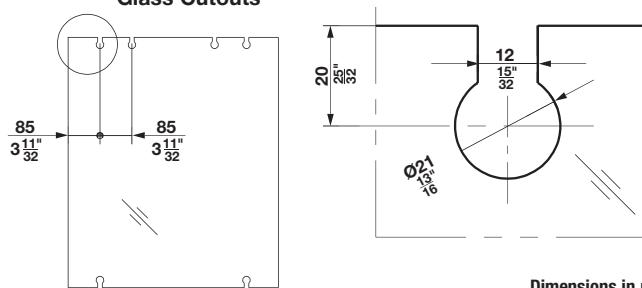
	Description	Material	Finish	Length	Item No.
	Upper guide, with mounting flanges	Steel	stainless	6 m (19' 8 1/4")	942.43.611
	Lower guide channel, 24 x 24 mm (15/16" x 15/16")	Aluminum	anodized	6 m (19' 8 1/4")	940.81.600
	Door stopper to lower guide channel	—	—	—	940.80.051
	Lower guide, with slider and suspension block	Plastic	—	—	946.12.060
	Lower guide, floor-mounted, (cannot be used in conjunction with deadbolt lock)	—	—	—	940.84.037
	Glass suspension profile 'G', 8 – 16 mm (5/16" – 5/8")	Aluminum	anodized unanodized	6.5 m (21' 3 15/16")	942.56.865 942.44.023
	Glass suspension profile, 8 – 16 mm (5/16" – 5/8")	Aluminum	unanodized	6.5 m (21' 3 15/16")	946.51.965
	Running gear	Wheels: Steel	—	—	942.41.014
	Suspension plate, with suspension bolt M12	Steel	galvanized	—	943.07.020
	Track stopper, to be drilled into upper track	Steel	galvanized	—	942.41.042
	Cover cap, for glass suspension profile "G"	Plastic	anthracite gray	—	942.56.029
	Cover cap, for glass suspension profile	Rubber	gray	—	946.50.020
	Glass holder insert, with M6 x 30 mm (1 3/16") screw	Plastic	—	—	940.84.024
	Cover cap for glass suspension/retainer profile	Plastic	anthracite gray	—	942.44.061

**Note**

It is important that the heavy glass sliding door isn't stopped only at one point, but at least at two points (top and bottom). It is to stop the door along the whole height. Please use recommended wall profile and rubber seal.

Locks	page 1.357
Glass edge protection profile	page 1.291
Finishes	page 1.286
Wall profile	page 1.290
Rubber seal	page 1.290

**Glass Cutouts**



Dimensions in mm  
Inches are approximate