

EKU Porta 100 G Set

- For 1 sliding door without upper track

	Item No.
	941.00.007

Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	-	-	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 - 12.7 mm (1/4" - 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 - 12.7 mm (1/4" - 1/2")	-	-	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

Note

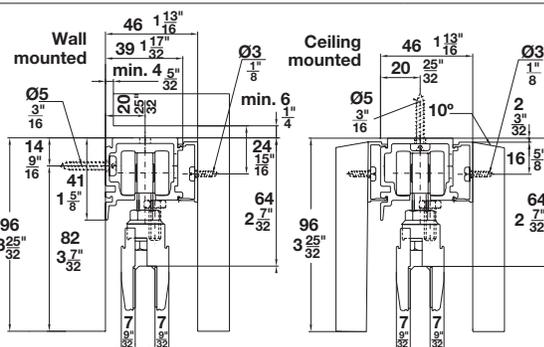
Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
	Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")			6 m (19' 8 1/4")	941.00.603
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")			6 m (19' 8 1/4")	941.00.860
	End piece to fascia, one-sided, wall mounted	Aluminum	anodized	44.5 mm (1 3/4")	941.00.066
	End piece to fascia, one-sided, ceiling mounted			49 mm (1 59/64")	941.00.070
	Clip piece for wood fascia, 97 x 29 x 9.5 mm (3 13/16" x 1 1/8" x 3/8")	Aluminum	unanodized	-	940.60.065
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft close 10 - 60 kg (22 - 132 lbs.)	-	-	-	940.60.045
	Soft close 61 - 100 kg (135 - 220 lbs.)	-	-	-	940.60.010
	Cover cap for notched service access in track	-	-	-	940.60.094
	Drill jig for notched service access in track	-	-	-	940.60.095


Note

Mounting instructions (included in fitting set) for planning and execution available upon request.



Mounting options with wood fascias

Fixing distance for clip component every 400 to 600 mm (15 3/4"-23 5/8")



Floor mounted door stop page 1.290

Toplock pages 1.352-1.356

Dimensions in mm
 Inches are approximate

Dimensional data not binding. We reserve the right to alter specifications without notice.

EKU Porta 100 GF Set

- For 1 sliding door without upper track

					Item No.
					941.00.007




Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	-	-	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	-	-	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")			6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")			6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")			6 m (19' 8 1/4")	941.01.760
	Fixing set for support profile and fixed glazing profile	-	-	-	941.01.899
	End piece to fascia, one-sided, wall mounted	Aluminum	anodized	64 mm (2 3/16")	941.00.068
	End piece to fascia, one-sided, wall mounted			70 mm (2 3/4")	941.00.069
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft close 10 – 60 kg (22 – 132 lbs.)	-	-	-	940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.

Floor mounted door stop	page 1.290
Toplock	pages 1.352-1.356

Dimensions in mm
Inches are approximate

Dimensional data not binding. We reserve the right to alter specifications without notice.

EKU Porta 100 GFO

	Item No.
	941.00.007



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount

Dimensional data not binding. We reserve the right to alter specifications without notice.

Floor mounted door stop	page 1.290
Toplock	pages 1.352-1.356

Dimensions in mm
 Inches are approximate

EKU Porta 100 GU Set

- For 1 sliding door without upper track

	Item No.
	941.00.007

Individual Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	-	-	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 - 12.7 mm (1/4" - 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 - 12.7 mm (1/4" - 1/2")	-	-	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

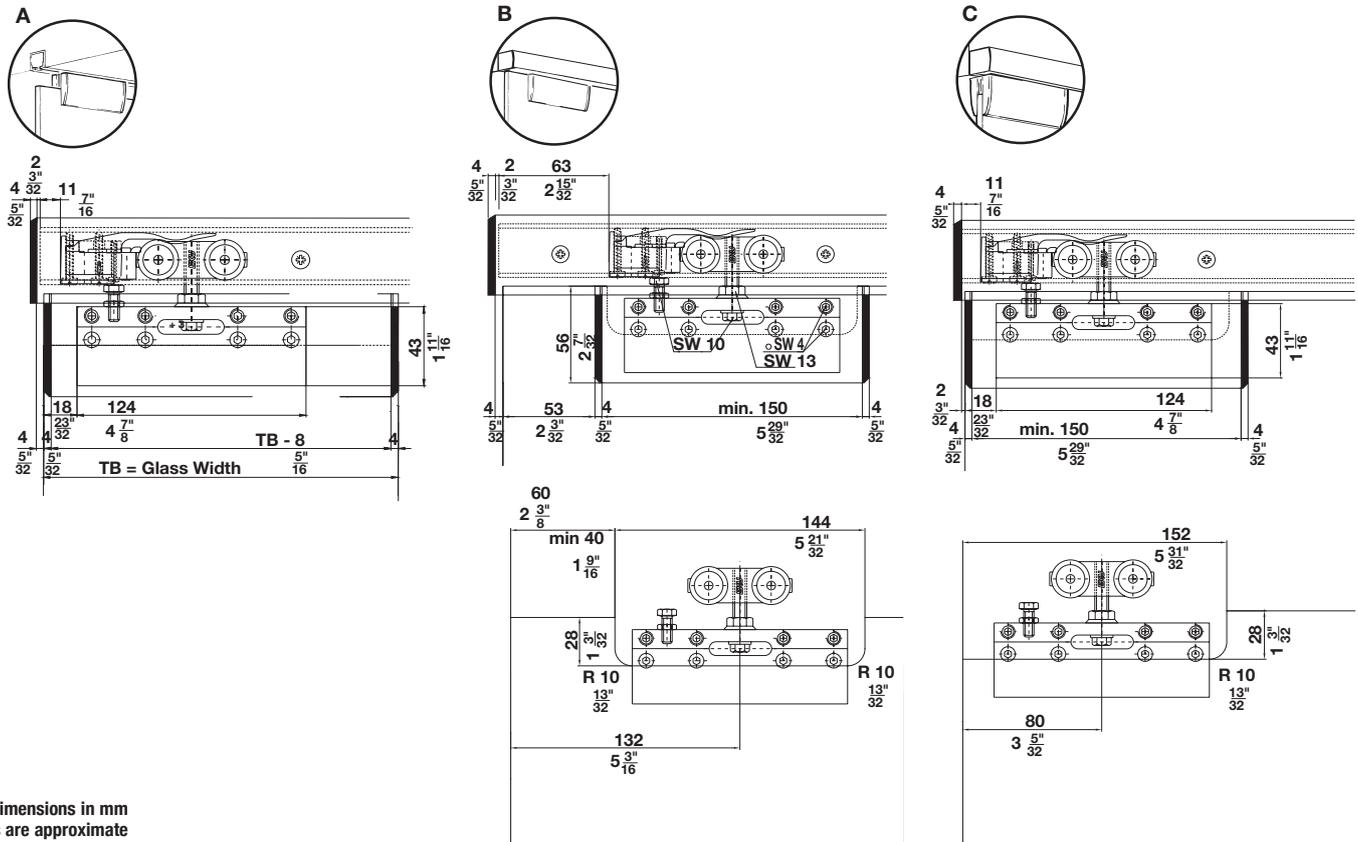
Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Mounting Examples

With continuous clip-on fascia, glass cut-outs not required

With short clip-on fascia, glass cut-outs required



Dimensions in mm
Inches are approximate

HAWA Junior 40/GS

Set


- For 1 sliding door without upper track and lower guide channel

	Item No.
	940.41.010

Supplied With

Mounting instructions



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	-	-	2 pcs.	940.41.100
	Suspension bolt, M8	-	-	2 pcs.	941.00.071
	Clamp shoe, adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	-	2 pcs.	941.00.020
	Track stopper	-	-	2 pcs.	940.40.041
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	-	-	1 pc.	941.00.031
	Wall buffer	Rubber	black	1 pc.	407.01.930

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	anodized, clear	1.4 m (4' 7 1/8")	940.40.140
				1.6 m (5' 3")	940.40.160
				1.8 m (5' 10 7/8")	940.40.180
				2 m (6' 6 3/4")	940.40.200
				3 m (9' 10 1/8")	940.40.300
				4 m (13' 1 1/2")	940.40.400
				6 m (19' 8 1/4")	940.40.600
	Glider, self adhesive, for 8 mm (5/16") thick glass	Plastic	-	-	940.40.033
	Glider, self adhesive, for 10 mm (13/32") thick glass	Plastic	-	-	940.40.034
	Lower guide channel, 20 x 20 mm (25/32" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.925
	Lower guide channel, 20 x 20 mm (25/32" x 25/32")			6 m (19' 8 1/4")	941.00.960

Dimensional data not binding. We reserve the right to alter specifications without notice.

Angle profile	page 1.288
Toplock	pages 1.352-1.356
Lower guide channel	page 1.290
Clip-on fascias and end caps to clamp shoe	page 1.219
Floor mounted door stop	page 1.290
Glass edge protection seals	page 1.290

Dimensions in mm
Inches are approximate

HAWA Junior 80/GS

Set

- For 1 sliding door without upper track and lower guide channel

	Item No.
	940.81.000

Supplied With

Mounting instructions


Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	-	-	2 pcs.	940.80.012
	Suspension bolt, M10	-	-	2 pcs.	941.00.072
	Clamp shoe, adjustable from 6 – 12.7 (1/4” – 1/2”)	Aluminum	-	2 pcs.	941.00.020
	Track stopper with adjustable retention spring	-	-	2 pcs.	940.80.040
	Floor guide, adjustable from 6 – 12.7 (1/4” – 1/2”)	-	-	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	407.01.930

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600
	Gliders, self adhesive, for 8 mm (5/16”) thick glass	Plastic	-	-	940.40.033
	Gliders, self adhesive, for 10 mm (13/32”) thick glass	Plastic	-	-	940.40.034
	Lower guide channel, 20 x 20 mm (25/32”) x 25/32”)	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.925
				6 m (19' 8 1/4")	941.00.960

Dimensional data not binding. We reserve the right to alter specifications without notice.

Angle profile	page 1.288
Toplock	pages 1.352-1.356
Clip-on fascias and end caps to clamp shoe	page 1.219
Floor mounted door stop	page 1.290
Glass edge protection profiles	page 1.291
Soft close	page 1.287

Dimensions in mm
 Inches are approximate