

EKU Porta 60/100 H Set

- For 1 sliding door without the upper track

Door Weight	Item No.
≤60 kg (132 lbs.)	940.60.111
≤100 kg (220 lbs.)	941.00.111

Note

Order 2 sets for bi-parting doors.

Set Components

	Description	Material	Finish	Qty.
	Running gear, with four wheels, suspension screw and nut	–	–	2 pcs.
	Support flange	Steel	galvanized	2 pcs.
	Track stopper, with retaining spring	–	–	2 pcs.
	Floor guide, adjustable	Plastic	anthracite	1 pc.
	Fixing screws	–	–	1 set

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 30 x 31 mm (1 3/16" x 1 7/32")	Aluminum	mill	2 m (6' 6 3/4")	941.00.200
				2.5 m (8' 2 7/16")	941.00.250
				6 m (19' 8 1/4")	941.00.600
		Aluminum	anodized	2 m (6' 6 3/4")	941.00.205
				2.5 m (8' 2 7/16")	941.00.255
				6 m (19' 8 1/4")	941.00.605
	Combination track, pre-drilled, for wall and ceiling mounting, 39 x 41 mm (1 17/32" x 1 5/8")	Aluminum	mill	2.5 m (8' 2 7/16")	941.00.253
				3.5 m (11' 5 25/32")	941.00.353
				6 m (19' 8 1/4")	941.00.603
	Clip panel, 60 mm (2 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.425
				3.5 m (11' 5 25/32")	941.12.435
				6 m (19' 8 1/4")	941.12.460
	Clip, for wood and aluminum panel, pre-drilled	Aluminum	mill	97 mm (3 13/16")	940.60.065
	Floor guide, adjustable	Plastic	anthracite	65 mm (2 9/16")	941.00.037
	Floor guide, with wall mounting bracket	Steel	galvanized	81.5 mm (3 7/32")	941.00.036

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

EKU Divido 100 H Set


- For 1 sliding door without upper track

Item No.
941.00.111

Set Components

	Description	Material	Finish	Qty.
	Running gear, with four wheels	Plastic	white	2 pcs.
	Suspension bolt, M8 x 32 mm	Steel	zinc-plated	2 pcs.
	Set nut, M8	Steel	zinc-plated	2 pcs.
	Suspension plate	Steel	zinc-plated	2 pcs.
	Door stopper with adjustable retention spring	Plastic	gray	2 pcs.
	Lower guide	Plastic	anthracite gray	1 pc.
	Fixing screws	–	–	–

Individual Components

	Description	Material	Finish	Length	Item No.
	Single upper track, 39 x 41 mm (1 9/16" x 1 5/8")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
				3.5 m (11' 5 13/16")	941.00.353
				6 m (19' 8 1/4")	941.00.603
	Dual upper track, 73 x 31 mm (2 7/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.925
				3.5 m (11' 5 13/16")	941.12.935
				6 m (19' 8 1/4")	941.12.960
	Triple upper track 111 x 31 mm (4 3/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.425
				3.5 m (11' 5 13/16")	941.13.435
				6 m (19' 8 1/4")	941.13.460
	Spacer profile for wall mounting of single upper track 11 x 36 mm (7/16" x 1 7/16")	Plastic	gray	2 m (6' 6 3/4")	941.13.220
	Clip-in skirt, 10 x 42 mm (3/8" x 1 11/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.325
				3.5 m (11' 5 13/16")	941.12.335
				6 m (19' 8 1/4")	941.12.360
	Clip-on fascia to upper track, 7 x 60 mm (5/16" x 2 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.425
				3.5 m (11' 5 13/16")	941.12.435
				6 m (19' 8 1/4")	941.12.460
	Brush seal for clip-on fascia, 5 x 5 mm (3/16" x 3/16")	Plastic	gray	10 m (32' 9 11/16")	405.80.501
	End piece to fascia, one-sided, wall mounted, 51 x 60 mm (2" x 2 3/8")	Aluminum	anodized	–	941.12.060
	Clip piece for wood fascia, 97 x 29 x 9.5 mm (3 13/16" x 1 1/8" x 3/8"), mounted every 500 mm (19 11/16")	Aluminum	unanodized	–	940.60.065
	Soft close	–	–	10 - 60 kg (22 - 132 lbs.)	940.60.045
		–	–	61 - 100 kg (133 - 200 lbs.)	940.60.010
	Cover cap, for soft close	–	–	–	940.60.094
	Milling jig, for soft close	–	–	–	940.60.095

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

EKU Porta 100 G Set

- For 1 sliding door without upper track

Item No.
941.00.007






Set Components

Description	Material	Finish	Qty.	Item No.
 Double roller running gear	–	–	2 pcs.	941.00.015
 Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
 Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
 Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
 Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
 Track stopper	Plastic	gray	1 pc.	940.60.041
 Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
 Buffer	Rubber	black	1 pc.	940.60.051

Note

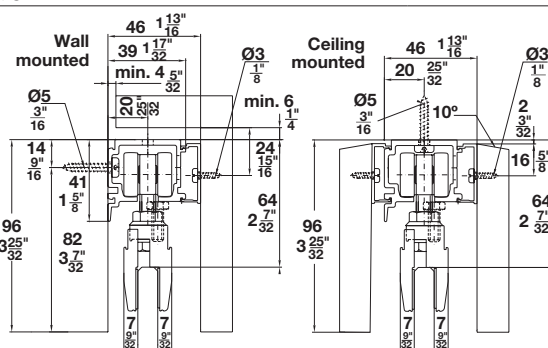
Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

Description	Material	Finish	Length	Item No.
 Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
 Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	6 m (19' 8 1/4")	941.00.603
 Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
 Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	6 m (19' 8 1/4")	941.00.860
 End piece to fascia, one-sided, wall mounted	Aluminum	anodized	44.5 mm (1 3/4")	941.00.066
 End piece to fascia, one-sided, ceiling mounted	Aluminum	anodized	49 mm (1 59/64")	941.00.070
 Clip piece for wood fascia, 97 x 29 x 9.5 mm (3 13/16" x 1 1/8" x 3/8")	Aluminum	unanodized	–	940.60.065
 Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
 Soft close 10 - 60 kg (22 - 132 lbs.)	–	–	–	940.60.045
 Soft close 61 - 100 kg (135 - 220 lbs.)	–	–	–	940.60.010
 Cover cap for notched service access in track	–	–	–	940.60.094
 Drill jig for notched service access in track	–	–	–	940.60.095


Note

Mounting instructions (included in fitting set) for planning and execution available upon request.



Mounting options with wood fascias

Fixing distance for clip component every 400 to 600 mm (15 3/4"–23 5/8")



Floor mounted door stop

page 1.290

Toplock

pages 1.352-1.356

Dimensions in mm
Inches are approximate

EKU Porta 100 GU Set
Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
				6 m (19' 8 1/4")	941.00.603
	Clip-on fascia, to upper track, 46 x 43 mm (1 13/16" x 1 11/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.925
				6 m (19' 8 1/4")	941.01.960
	Clip-on fascia, to clamping shoe, 56 x 10 mm (2 3/16" x 13/32") Note Has to be cut to size, refer to drawings on page 1.218	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.625
	End caps, to clip-on fascia to upper track and clamp shoe Order requirements: Option A 1 set Option B and C 2 sets	Plastic	anthracite	-	941.01.999
	End caps for clip-on fascia to clamp shoe Order requirements: Option A 1 set Option B and C 2 sets	Plastic	anthracite	-	941.01.998
	Soft closer 10 – 60 kg (22 – 132 lbs)	-	-	-	940.60.045
	Soft closer 61 – 100 kg (135 – 220 lbs)				940.60.010
	Cover cap for notched service access in track				940.60.094
	Drill jig for notched service access in track				940.60.095

Note


Mounting instructions (included in fitting set) for planning and execution available upon request. Clip-on fascias and end caps can also be used for the Junior 40 and 80/GS sliding systems.

EKU Divido 100 GR Set


- For 1 sliding door without upper track

Item No.
941.12.000

Individual Components

	Description	Material	Finish	Qty.
	Running gear with four wheels	Plastic	white	2 pcs.
	Suspension bolt, M8 x 35 mm	Steel	zinc-plated	2 pcs.
	Set nut, M8	Steel	zinc-plated	2 pcs.
	Suspension plate	Aluminum	–	2 pcs.
	Door stopper with adjustable retention spring	Plastic	gray	2 pcs.
	Lower guide with plastic horizontal wheels	Steel	zinc-plated	1 pc.
	Fixing screws	–	–	1 set

Individual Components

	Description	Material	Finish	Length	Item No.
	Single upper track, 39 x 41 mm (1 9/16" x 1 5/8")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
				3.5 m (11' 5 25/32")	941.00.353
				6 m (19' 8 1/4")	941.00.603
	Dual upper track, 73 x 31 mm (2 7/8" x 1 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.925
				3.5 m (11' 5 25/32")	941.12.935
				6 m (19' 8 1/4")	941.12.960
	Spacer profile for wall mounting of single upper running track, 11 x 36 mm (7/16" x 1 7/16")	Plastic	gray	2 m (6' 6 3/4")	941.13.220
	Clip-in skirt, 10 x 42 mm (13/32" x 1 11/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.325
				3.5 m (11' 5 25/32")	941.12.335
				6 m (19' 8 1/4")	941.12.360
	Clip-on fascia to upper running track, 7 x 60 mm (5/16" x 2 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.425
				3.5 m (11' 5 25/32")	941.12.435
				6 m (19' 8 1/4")	941.12.460
	Brush seal for clip-on fascia, 5 x 5 mm (3/16" x 3/16")	Plastic	gray	10 m (32' 9 11/16")	405.80.501
	End piece to fascia, one-sided, wall mounted, 51 x 60 mm (2" x 2 3/8")	Aluminum	anodized	–	941.12.060
	Soft close 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094
	Drill jig for notched service access in track				940.60.095

Installation Plan

(included in fitting set), mounting instructions for planning and execution available upon request.

Aluminum frame profiles pages 1.226-1.227