

EKU Porta 100 G Set

- For 1 sliding door without upper track

Item No.
941.00.007






Set Components

Description	Material	Finish	Qty.	Item No.
 Double roller running gear	–	–	2 pcs.	941.00.015
 Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
 Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
 Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
 Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
 Track stopper	Plastic	gray	1 pc.	940.60.041
 Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
 Buffer	Rubber	black	1 pc.	940.60.051

Note

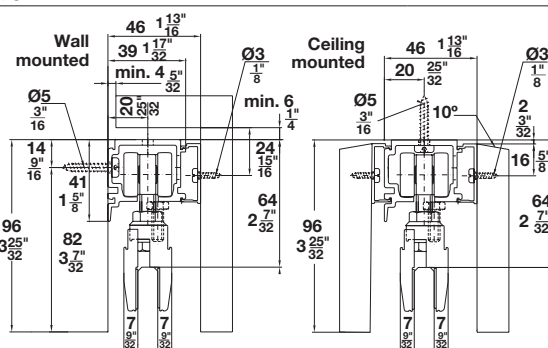
Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

Description	Material	Finish	Length	Item No.
 Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.253
 Upper track, pre-drilled, 41 x 39 mm (1 3/4" x 1 17/32")	Aluminum	unanodized	6 m (19' 8 1/4")	941.00.603
 Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
 Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	6 m (19' 8 1/4")	941.00.860
 End piece to fascia, one-sided, wall mounted	Aluminum	anodized	44.5 mm (1 3/4")	941.00.066
 End piece to fascia, one-sided, ceiling mounted	Aluminum	anodized	49 mm (1 59/64")	941.00.070
 Clip piece for wood fascia, 97 x 29 x 9.5 mm (3 13/16" x 1 1/8" x 3/8")	Aluminum	unanodized	–	940.60.065
 Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
 Soft close 10 - 60 kg (22 - 132 lbs.)	–	–	–	940.60.045
 Soft close 61 - 100 kg (135 - 220 lbs.)	–	–	–	940.60.010
 Cover cap for notched service access in track	–	–	–	940.60.094
 Drill jig for notched service access in track	–	–	–	940.60.095


Note

Mounting instructions (included in fitting set) for planning and execution available upon request.



Mounting options with wood fascias

Fixing distance for clip component every 400 to 600 mm (15 3/4"–23 5/8")



Floor mounted door stop

page 1.290

Toplock

pages 1.352-1.356

Dimensions in mm
Inches are approximate

EKU Porta 100 GF Set

- For 1 sliding door without upper track

Item No.
941.00.007



Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")			6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")			6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
	Fixed glazing profile/lower guide channel, pre-drilled, 30 x 20 mm (1 3/16" x 25/32")			6 m (19' 8 1/4")	941.01.760
	Fixing set for support profile and fixed glazing profile	–	–	–	941.01.899
	End piece to fascia, one-sided, wall mounted	Aluminum	anodized	64 mm (2 3/16")	941.00.068
	End piece to fascia, one-sided, wall mounted			70 mm (2 3/4")	941.00.069
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft close 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft close 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.









Floor mounted door stop page 1.290

Toplock pages 1.352-1.356

Dimensions in mm
Inches are approximate

EKU Porta 100 GFO

Individual Components

	Description	Material	Finish	Length	Item No.
	Wall bracket set, set for mounting 1 upper track	–	–	–	941.00.060
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Reinforcement profile, 43 x 70 mm (1 11/16" x 2 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.525
				6 m (19' 8 1/4")	941.01.560
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
				6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
				6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
				6 m (19' 8 1/4")	941.01.760
	Angle profile for fixed glass, pre-drilled, 30 x 19 mm (1 3/16" x 3/4")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.420
	Angle profile for fixed glass, 30 x 17 mm (1 3/16" x 11/16")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.320
	Wall profile, 38 x 21 mm (1 1/2" x 13/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.24.925
				3.5 m (11' 5 13/16")	941.24.935
	Seal for wall profile	Rubber	black	2.5 m (8' 2 7/16")	941.24.081
				3.5 m (11' 5 13/16")	941.24.082
	Fixing set for support profile and Fixed glazing profile	–	–	–	941.01.899
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft closer 10 – 60 kg (22 – 132 lbs.)	–	–	–	940.60.045
	Soft closer 61 – 100 kg (135 – 220 lbs.)				940.60.010
	Cover cap for notched service access in track				940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.

Floor mounted door stop	page 1.206
Toplock	pages 1.352-1.356