

Antra I Fitting Sets

- Complete sets for 1 sliding wood door

Door width, max.	Track length A	Item No.
0.9 m (35 7/16")	1.8 m (5' 10 7/8")	941.07.184
1 m (39 7/8")	2.1 m (6' 10 11/16")	941.07.185
1.1 m (43 5/16")	2.3 m (7' 6 9/16")	941.07.186
1.25 m (49 3/16")	2.54 m (8' 4")	941.07.187

Set Components

	Description	Material	Finish	Track length	Qty./door	Item No.
	Upper track, hollow tube	Stainless Steel	dark bronze	1.8 m (5' 10 7/8")	1 pc.	941.07.919
				2.1 m (6' 10 11/16")		941.07.922
				2.3 m (7' 6 9/16")		941.07.924
				2.54 m (8' 4")		941.07.926
	Running gear, face mounted	Stainless Steel	dark bronze	–	2 pcs.	941.07.191
	Door stop	Stainless Steel	dark bronze	–	1 set (1 LH and 1 RH)	941.07.301
	Wall attachment with 19 mm (3/4") spacer	Stainless Steel	dark bronze	1 pc.	4 pcs. (up to door width of 1 m (39 7/8") or 5 pcs.	941.07.411
				2 pc. set		940.64.405
				3 pc. set		940.64.406
	Lower guide	Plastic	anthracite	–	1 pc.	941.07.131
	Hex key, 5 mm	Steel	galvanized	–	1 pc.	008.28.062

Installation Plan

Included in fitting set, also available for planning and execution upon request.

Note

Item numbers stated are valid for 1 pc. When ordering individual components please indicate the desired quantity.
Order hanger bolts separately.
For bi-parting application order 2 sets plus the coupler 941.07.407.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Hanger bolts	page 1.107
Accessories	pages 1.119–1.123

Dimensions in mm
Inches are approximate

Antra II Fitting Sets

- Complete sets for 1 sliding wood door

Door width, max.	Track length A	Item No.
0.9 m (35 7/16")	1.8 m (5' 10 7/8")	941.07.200
1 m (39 7/8")	2.1 m (6' 10 11/16")	941.07.201
1.1 m (43 5/16")	2.3 m (7' 6 9/16")	941.07.202
1.25 m (49 3/16")	2.54 m (8' 4")	941.07.203

Set Components

	Description	Material	Finish	Track length	Qty./door	Item No.
	Upper track, hollow tube	Stainless Steel	dark bronze	1.8 m (5' 10 7/8")	1 pc.	941.07.919
				2.1 m (6' 10 11/16")		941.07.922
				2.3 m (7' 6 9/16")		941.07.924
				2.54 m (8' 4")		941.07.926
	Running gear, face mounted	Stainless Steel	dark bronze	–	2 pcs.	941.07.192
	Door stop	Stainless Steel	dark bronze	–	1 set (1 LH and 1 RH)	941.07.301
	Wall attachment with 19 mm (3/4") spacer	Stainless Steel	dark bronze	1 pc.	4 pcs. (up to door width of 1 m (39 7/8") or 5 pcs.	941.07.411
				2 pc. set		940.64.405
				3 pc. set		940.64.406
	Lower guide	Plastic	anthracite	–	1 pc.	941.07.131
	Hex key, 5 mm	Steel	galvanized	–	1 pc.	008.28.062

Installation Plan

Included in fitting set, also available for planning and execution upon request.

Note

Item numbers stated are valid for 1 pc. When ordering individual components please indicate the desired quantity.

Order hanger bolts separately.


For bi-parting application order 2 sets plus the coupler 941.07.407.

Accessories – For Hollow Tube Stainless Steel Tracks

Running Gear and Tracks

	Description	Material	Finish	Drillings	Length/Diameter	Item No.
	Running gear for Flatec IV, height adjustable +/- 3 mm (1/8")	Stainless Steel	matt	–	–	940.64.190
			polished			940.64.192
	Running gear for Flatec V	Stainless Steel	matt	–	–	940.64.195
	Running gear for Project, non-height adjustable	Stainless Steel	matt	–	–	940.64.198
	Running gear for Antra I	Stainless Steel	dark bronze	–	–	941.07.191
	Running gear for Antra II	Stainless Steel	dark bronze	–	–	941.07.192
	Upper track, hollow tube, pre-drilled	Stainless Steel	matt	4	1.8 m (5' 10 7/8")	940.64.718
				4	2.1 m (6' 10 11/16")	940.64.721
				5	2.3 m (7' 6 9/16")	940.64.723
				5	2.54 m (8' 4")	940.64.725
	Upper track, hollow tube, pre-drilled	Stainless Steel	polished	4	1.8 m (5' 10 7/8")	940.64.797
				4	2.1 m (6' 10 11/16")	940.64.796
				5	2.3 m (7' 6 9/16")	940.64.795
				5	2.54 m (8' 4")	940.64.794
	Upper track, hollow tube, pre-drilled	Stainless Steel	dark bronze	4	1.8 m (5' 10 7/8")	941.07.919
				4	2.1 m (6' 10 11/16")	941.07.922
				5	2.3 m (7' 6 9/16")	941.07.924
				5	2.54 m (8' 4")	941.07.926
	Coupling sleeve for connecting two upper tracks, not crossable	Stainless Steel	matt	–	35 mm (1 3/8")	941.07.401
			dark bronze			941.07.407
	Coupling for connecting two upper tracks, crossable	Stainless Steel	matt	–	32 mm (1 1/4")	941.07.402
			polished			941.07.404
	Angular coupling sleeve for connecting two upper tracks, not crossable, adjustable 90° - 270°	Stainless Steel	matt	–	35 mm (1 3/8")	941.07.406

Drilling dimensions for hollow tube upper tracks:

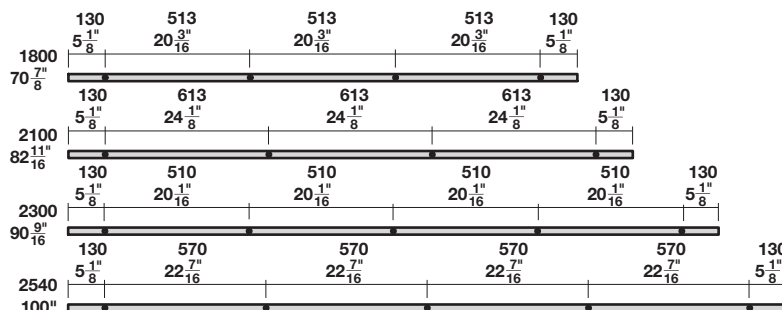

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

Antra I Fitting Sets

- Complete sets for 1 sliding glass door

Finish	Door width, max.	Track length	Item No.
dark bronze	0.9 m (35 7/16")	1.8 m (5' 10 7/8")	941.07.180
	1 m (39 7/8")	2.1 m (6' 10 11/16")	941.07.181
	1.1 m (43 5/16")	2.3 m (7' 6 9/16")	941.07.182
	1.25 m (49 3/16")	2.54 m (8' 4")	941.07.183

Set Components

	Description	Material	Finish	Track length	Qty./door	Item No.
	Upper track, hollow tube	Stainless Steel	dark bronze	1.8 m (5' 10 7/8")	1 pc.	941.07.919
				2.1 m (6' 10 11/16")		941.07.922
				2.3 m (7' 6 9/16")		941.07.924
				2.54 m (8' 4")		941.07.926
	Running gear, face mounted	Stainless Steel	dark bronze	–	2 pcs.	941.07.190
	Door stop	Stainless Steel	dark bronze	–	2 pcs.	941.07.301
	Wall attachment with 5 mm (3/16") spacer	Stainless Steel	dark bronze	2 pc. set	4 pcs. (up to door width of 1 m (39 7/8") or 5 pcs.	940.64.411
				3 pc. set		940.64.404
	Lower guide	Stainless Steel	dark bronze	–	1 pc.	941.07.290
	Hex key, 5 mm (3/16")	Steel	galvanized	–	1 pc.	008.28.062

Installation Plan

Included in fitting set, also available for planning and execution upon request.

Note

Item numbers stated are valid for 1 pc. When ordering individual components please indicate the desired quantity.
Order hanger bolts separately.


Hanger bolts	page 1.317
Accessories	page 1.311-1.317
Bi-parting applications	page 1.310

Accessories – For Hollow Tube Stainless Steel Tracks

Running Gear and Tracks

	Description	Material	Finish	Drillings	Length/Diameter	Item No.
	Running gear for Flatec IV glass, height adjustable +/- 3 mm (1/8")	Stainless Steel	matt	–	–	940.64.189
			polished			940.64.191
	Running gear for Project glass	Stainless Steel	matt	–	–	940.64.197
	Running gear for Antra I glass	Stainless Steel	dark bronze	–	–	941.07.190
	Upper track, hollow tube, pre-drilled	Stainless Steel	matt	4	1.8 m (5' 10 7/8")	940.64.718
				4	2.1 m (6' 10 11/16")	940.64.721
				5	2.3 m (7' 6 9/16")	940.64.723
				5	2.54 m (8' 4")	940.64.725
	Upper track, hollow tube, pre-drilled	Stainless Steel	polished	4	1.8 m (5' 10 7/8")	940.64.797
				4	2.1 m (6' 10 11/16")	940.64.796
				5	2.3 m (7' 6 9/16")	940.64.795
				5	2.54 m (8' 4")	940.64.794
	Upper track, hollow tube, pre-drilled	Stainless Steel	dark bronze	4	1.8 m (5' 10 7/8")	941.07.919
				4	2.1 m (6' 10 11/16")	941.07.922
				5	2.3 m (7' 6 9/16")	941.07.924
				5	2.54 m (8' 4")	941.07.926
	Coupling sleeve for connecting two upper tracks, not crossable	Stainless Steel	matt	–	Ø35 mm (1 3/8")	941.07.401
			dark bronze			941.07.407
	Coupling for connecting two upper tracks, crossable	Stainless Steel	matt	–	Ø32 mm (1 1/4")	941.07.402
			polished			941.07.404
	Angular coupling sleeve for connecting two upper tracks, not crossable, adjustable 90° – 270°	Stainless Steel	matt	–	Ø35 mm (1 3/8")	941.07.406

Drilling dimensions for hollow tube upper tracks:

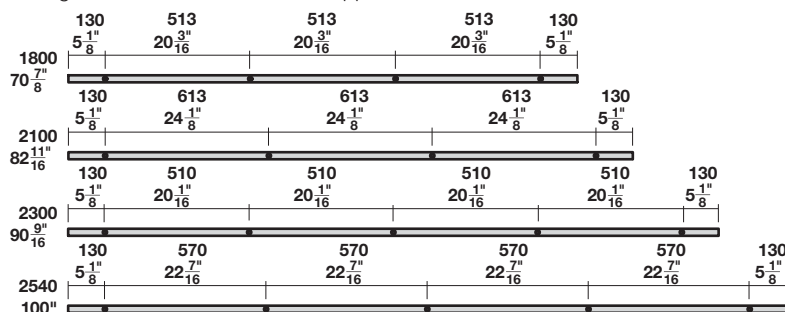

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate