



Accessories – For Solid Rod Stainless Steel Tracks

Bi-parting Applications For Flatec I, Flatec II, Unotec Home and Tritec

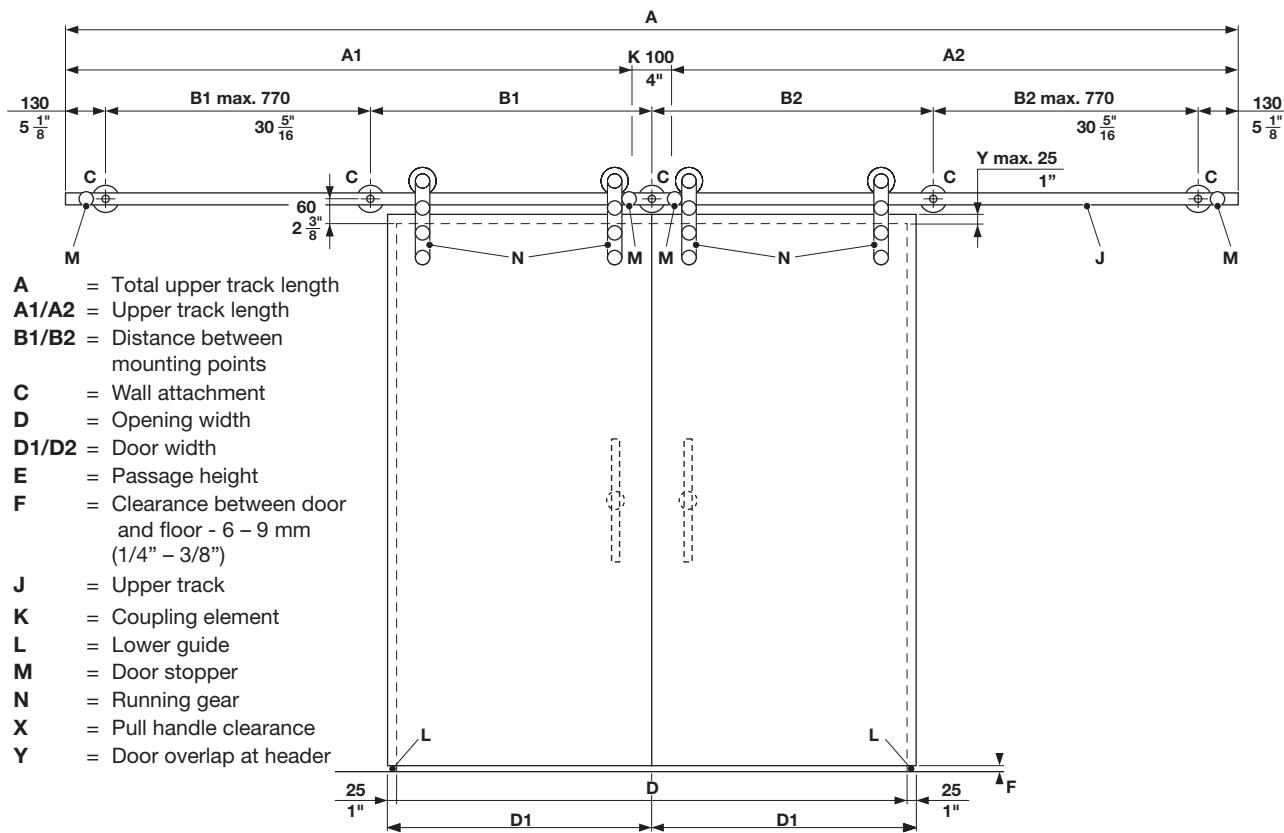

A = Total upper track length
A1/A2 = Upper track length
B1/B2 = Distance between mounting points
C = Wall attachment
D = Opening width
D1/D2 = Door width
E = Passage height
F = Clearance between door and floor - 6 – 9 mm (1/4" – 3/8")
J = Upper track
K = Coupling element
L = Lower guide
M = Door stopper
N = Running gear
X = Pull handle clearance
Y = Door overlap at header

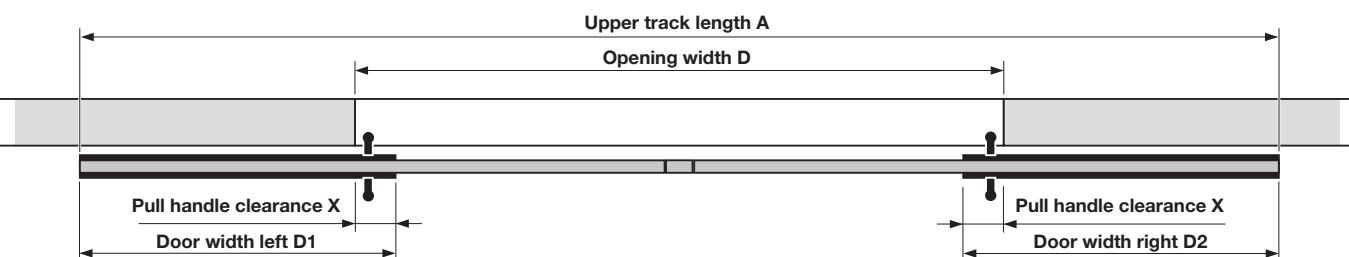

Tracks

Description	Material	Finish	Drillings	Track Length A	Item No.
Upper track for up to a 1.5 m (59") wide opening, solid rod	Stainless Steel	matt	5	3 m (9' 10 1/8") (consists of 2 tracks and 1 coupling element)	941.07.930
Upper track for up to a 1.83 m (72") wide opening, solid rod	Stainless Steel	matt	7	3.64 m (12' 0") (consists of 2 tracks and 1 coupling element)	941.07.936
Upper track for up to a 2.44 m (96") wide opening, solid rod	Stainless Steel	matt	9	4.88 m (16' 0") (consists of 2 tracks and 1 coupling element)	941.07.948

Note

In addition to the above upper tracks the following parts have to be ordered to complete a bi-parting sliding door assembly:

4 running gears, 941.07.119 for Flatec I, 941.07.120 for Flatec II, 941.07.122 for Unotec, 941.07.125 for Tritec

2 lower guides, 941.07.131

2 door dampener sets, 941.07.096 for Flatec I and II, 941.07.095 for Unotec and Tritec

5, 7 or 9 pcs. of wall attachments, refer to catalog page **1.104**.

1 fastening wrench, 941.07.117



5, 7 or 9 hanger bolts, refer to catalog page **1.107**.

Pull handles	pages 2.10-2.32
Accessories	pages 1.105-1.107
Hanger bolts	page 1.107

Dimensions in mm
Inches are approximate

Accessories – For Solid Rod Stainless Steel Tracks

Bi-parting Applications For Flatec I, Unotec Home and Tritec

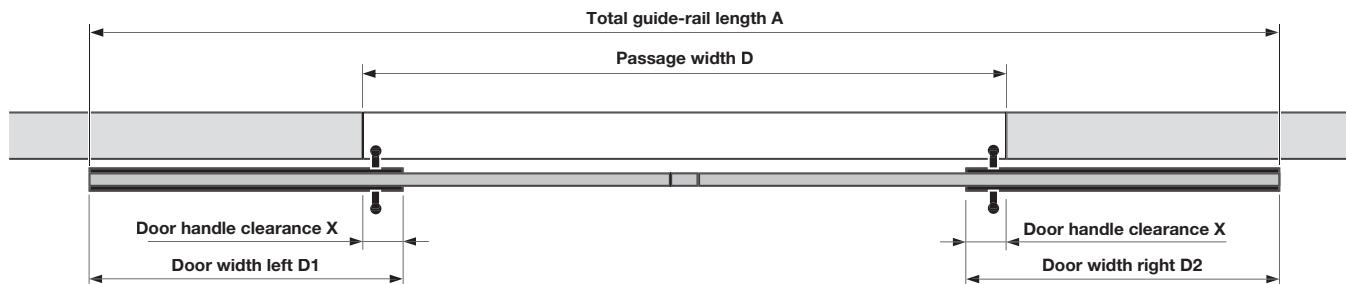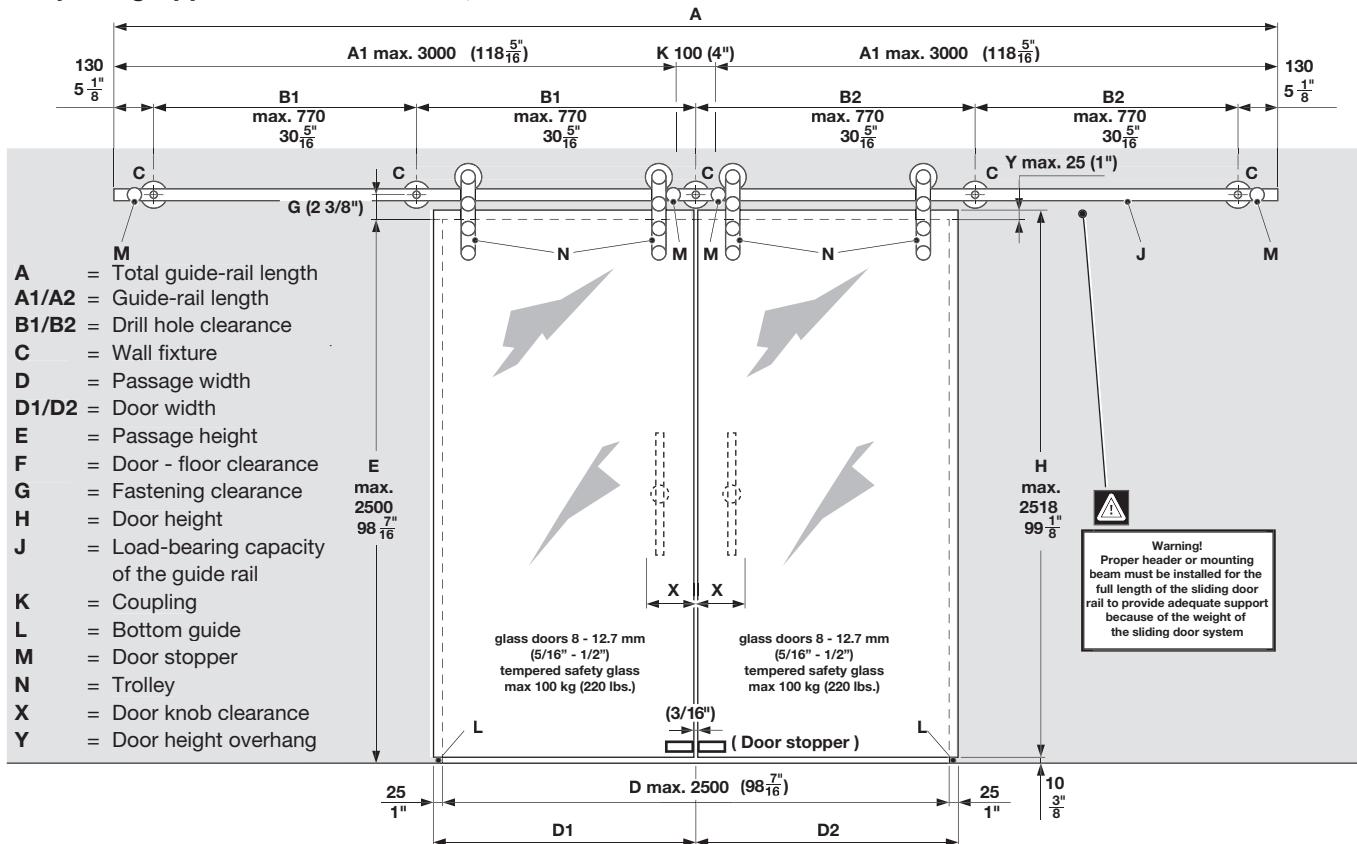

Tracks

	Description	Material	Finish	Drillings	Track length	Item No.
	Upper track for up to a 1.5 m (59") wide opening, solid rod	Stainless Steel	matt	5	3 m (9' 10 1/8") (consists of 2 tracks and 1 coupling element)	941.07.930
	Upper track for up to a 1.83 m (72") wide opening, solid rod	Stainless Steel	matt	7	3.64 m (12' 0") (consists of 2 tracks and 1 coupling element)	941.07.936
	Upper track for up to a 2.44 m (96") wide opening, solid rod	Stainless Steel	matt	9	4.88 m (16' 0") (consists of 2 tracks and 1 coupling element)	941.07.948

Note

In addition to the above upper tracks the following parts have to be ordered to complete a bi-parting sliding door assembly:
4 running gears, 941.07.118 for Flatec I, 941.07.121 for Unotec, 941.07.124 for Tritec

2 lower guides, 941.07.129

2 door dampener sets, 941.07.096 for Flatec I, 941.07.095 for Unotec and Tritec

5, 7 or 9 pcs. of wall attachments, refer to catalog page **1.312**.

1 fastening wrench, 941.07.117

5, 7 or 9 hanger bolts, refer to catalog page **1.317**.

1 door stopper set, 941.07.118 or 941.07.300

Dimensions in mm
Inches are approximate

AH **1.298**

www.hafele.com/us