

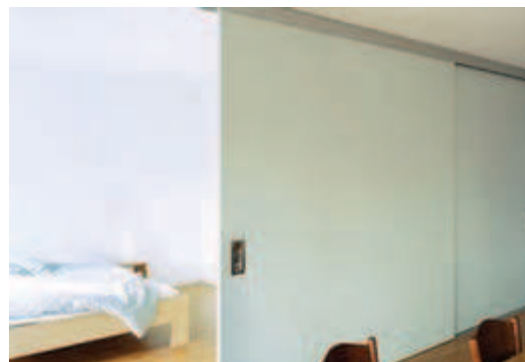


EKU Divido Lower Guide Application



- For sliding door systems 100 H and 100 HM
- Suitable as an additional floor guide option, especially for doors wider than 900 mm (35 7/16")
- Includes a spring-loaded anti-derail function which prevents unintentional disengagement through lifting or lateral shifting of doors




1

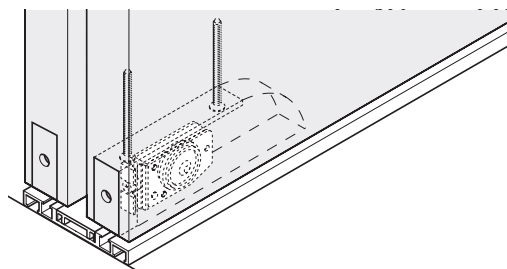







Surface mounted



Recess/Flush mounted



Individual Components

	Description	Material	Finish	Length	Item No.
	Spring loaded running gear with anti-derail device, single wheel, used as lower guide, non-weight bearing Note 2 pcs. are required per sliding door	–	–	–	941.12.030
	Adapter for running gear, includes mounting screws	Plastic	anthracite	–	941.12.031
	Single lower track, recessed, 13 x 8 mm (1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.825 941.13.835 941.13.860
	Mounting profile for 2 single lower tracks, recessed, 51 x 10 mm (2" x 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.125 941.13.135 941.13.160
	Single lower track, surface mounted, 38 x 8 mm (1 1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.725 941.13.735 941.13.760
	Dual lower track, surface mounted, 68 x 8 mm (2 11/16" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.625 941.13.635 941.13.660
	Clip profile to mounting profile and dual lower track, 25 x 6 mm (1" x 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.12.825 941.12.835 941.12.860

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate