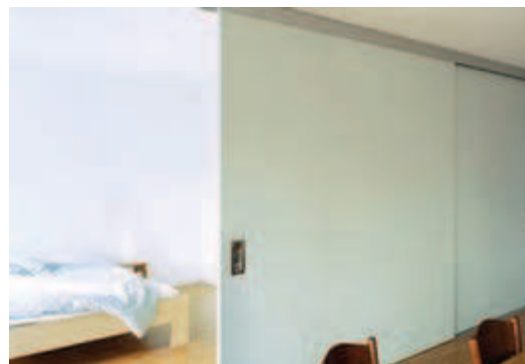

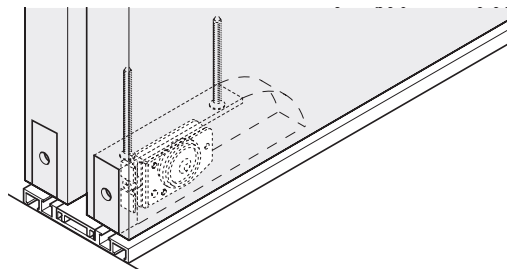


EKU Divido Lower Guide Application



- For sliding door systems 100 H and 100 HM
- Suitable as an additional floor guide option, especially for doors wider than 900 mm (35 7/16")
- Includes a spring-loaded anti-derail function which prevents unintentional disengagement through lifting or lateral shifting of doors




1









Surface mounted



Recess/Flush mounted



Individual Components

	Description	Material	Finish	Length	Item No.
	Spring loaded running gear with anti-derail device, single wheel, used as lower guide, non-weight bearing Note 2 pcs. are required per sliding door	–	–	–	941.12.030
	Adapter for running gear, includes mounting screws	Plastic	anthracite	–	941.12.031
	Single lower track, recessed, 13 x 8 mm (1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.825 941.13.835 941.13.860
	Mounting profile for 2 single lower tracks, recessed, 51 x 10 mm (2" x 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.125 941.13.135 941.13.160
	Single lower track, surface mounted, 38 x 8 mm (1 1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.725 941.13.735 941.13.760
	Dual lower track, surface mounted, 68 x 8 mm (2 11/16" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.13.625 941.13.635 941.13.660
	Clip profile to mounting profile and dual lower track, 25 x 6 mm (1" x 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16") 3.5 m (11' 5 13/16") 6 m (19' 8 1/4")	941.12.825 941.12.835 941.12.860

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

EKU Divido 80 H Set

- For 1 sliding door without upper guide channel and lower running track

Item No.
940.92.001

Set Components

	Description	Material	Finish	Qty.
	Running gear with anti-derail device, single wheel	–	–	2 pcs.
	Upper guide with plastic guide wheels, mounted on a zinc-plated steel base	–	–	2 pcs.
	Adapter for running gear, includes mounting screws	Plastic	gray	2 pcs.
	Door stopper set for lower track	Plastic	gray	2 pcs.
	Door stopper for upper guide channel	Plastic	gray	2 pcs.
	End piece to lower guide track	Plastic	gray	1 pc.

Individual Components

	Description	Material	Finish	Length	Item No.
	Single upper guide channel, 40 x 40 mm (1 9/16" x 1 9/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.525
				3.5 m (11' 5 13/16")	941.13.535
				6 m (19' 8 1/4")	941.13.560
	Dual upper guide channel, 78 x 40 mm (3 1/16" x 1 9/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.925
				3.5 m (11' 5 13/16")	941.13.935
				6 m (19' 8 1/4")	941.13.960
	Single lower track, recessed, 13 x 8 mm (1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.825
				3.5 m (11' 5 13/16")	941.13.835
				6 m (19' 8 1/4")	941.13.860
	Mounting profile for 2 single lower tracks, recessed, 51 x 10 mm (2" x 3/8")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.125
				3.5 m (11' 5 13/16")	941.13.135
				6 m (19' 8 1/4")	941.13.160
	Single lower track, surface mounted, 38 x 8 mm (1 1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.725
				3.5 m (11' 5 13/16")	941.13.735
				6 m (19' 8 1/4")	941.13.760
	Dual lower track, surface mounted, 68 x 8 mm (2 11/16" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.625
				3.5 m (11' 5 13/16")	941.13.635
				6 m (19' 8 1/4")	941.13.660
	Clip profile to mounting profile and dual lower track, 25 x 6 mm (1" x 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.825
				3.5 m (11' 5 13/16")	941.12.835
				6 m (19' 8 1/4")	941.12.860
	Center door stop, installed into upper guide channels, 33 x 90 mm (1 5/16" x 3 9/16")	Plastic	gray	–	941.12.040
	Soft close 61–80 kg (135–220 lbs.)	–	–	–	940.92.010

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

EKU Divido 80 GR Set

- For 1 sliding door without lower running track and upper guide channel





1

Item No.
940.92.000

Set Components

	Description	Material	Finish	Qty.
	Running gear with anti-derail device, single wheel	–	–	2 pcs.
	Upper guide with guide wheels	Plastic	–	2 pcs.
	Door stopper set for lower running track	Plastic	gray	2 pcs.
	Door stopper for upper guide channel	Plastic	gray	2 pcs.
	End piece to lower guide track	Plastic	gray	1 pc.
	Fixing screws	–	–	1 set

Individual Components

	Description	Material	Finish	Length	Item No.
	Single upper guide channel, 40 x 40 mm (1 9/16" x 1 9/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.525
				3.5 m (11' 5 25/32")	941.13.535
				6 m (19' 8 1/4")	941.13.560
	Dual upper guide channel, 78 x 40 mm (3 1/16" x 1 9/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.925
				3.5 m (11' 5 25/32")	941.13.935
				6 m (19' 8 1/4")	941.13.960
	Single lower running track, recessed, 13 x 8 mm (1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.825
				3.5 m (11' 5 25/32")	941.13.835
				6 m (19' 8 1/4")	941.13.860
	Mounting profile for single lower running track, recessed, 51 x 10 mm (2" x 13/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.125
				3.5 m (11' 5 25/32")	941.13.135
				6 m (19' 8 1/4")	941.13.160
	Single lower running track, surface mounted, 38 x 8 mm (1 1/2" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.725
				3.5 m (11' 5 25/32")	941.13.735
				6 m (19' 8 1/4")	941.13.760
	Dual lower running track, surface mounted, 68 x 8 mm (2 11/16" x 5/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.13.625
				3.5 m (11' 5 25/32")	941.13.635
				6 m (19' 8 1/4")	941.13.660
	Clip profile to mounting profile and dual lower running track, 25 x 6 mm (1" x 1/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.12.825
				3.5 m (11' 5 25/32")	941.12.835
				6 m (19' 8 1/4")	941.12.860
	Center door stop, installed into upper guide channels, 33 x 90 mm (1 5/16" x 3 9/16")	Plastic	gray	–	941.12.040
	Soft close 61 – 80 kg (135 – 220 lbs.)	–	–	–	940.92.010

Installation Plan

(included in fitting set), mounting instructions for planning and execution available upon request.

Aluminum frame profiles pages 1.226-1.227

Dimensions in mm
Inches are approximate