

HAWA Purolino-Plus 80


Accessories

1

	Description	Material	Finish	For glass thickness	Length	Item No.
	Glass fixing parts, for one sliding door, tempered glass	Aluminum	-	8 mm (5/16")	-	940.83.024
				10 mm (13/32")		940.83.025
				12 (12.7 mm) (1/2")		940.83.026
	Glass fixing parts, for one sliding door, laminated glass, with disposable drilling jig	-	-	8 mm (5/16")	-	940.83.027
				10 mm (13/32")		940.83.028
				12 mm (15/32")		940.83.029
	Soft and self closing mechanism, complete, for both sides	-	-	-	-	940.83.050
	Soft and self closing mechanism, complete, for one side, left	-	-	-	-	940.83.051
	Soft and self closing mechanism, complete, for one side, right	-	-	-	-	940.83.052
	Floor guide, 2-piece, with zero clearance	Aluminum	chrome-plated matt	8 – 13 mm (5/16" – 1/2")	-	941.18.032
			stainless steel colored			941.18.033
	Bottom door stopper 57 x 28 x 39 mm (2 1/4" x 1 1/8" x 1 9/16")	Aluminum	chrome-plated matt	8 – 16 mm (5/16" – 5/8")	-	940.40.052
			stainless steel colored			940.40.053
	Cover plate, with threaded pin, 1 pc.	Metal	chrome-plated matt	-	-	940.83.031
			stainless steel colored			940.83.032
	End profile set, prewall mounting	Aluminum	chrome-plated matt	-	2.5 m (8' 2 7/16)	940.83.125
			stainless steel colored		3.5 m (11' 5 13/16")	940.83.135
					2.5 m (8' 2 7/16)	940.83.126
			3.5 m (11' 5 13/16")		940.83.136	
	Rubber seal, for end profile set	Plastic	-	-	2.5 m (8' 2 7/16)	940.83.127
					3.5 m (11' 5 13/16")	940.83.137
	Wall profile set, prewall mounting, with support profile	Aluminum	anodized	-	2.5 m (8' 2 7/16)	940.83.225
			stainless steel colored		3.5 m (11' 5 13/16")	940.83.235
					2.5 m (8' 2 7/16)	940.83.226
			3.5 m (11' 5 13/16")		940.83.236	
	Wall profile, 38 x 21 mm (1 1/2" x 7/8")	Aluminum	anodized	Tempered glass: 8 – 12 (12.7 mm) (5/16" – 1/2")	2.5 m (8' 2 7/16)	941.24.925
			stainless steel colored		laminated glass: 8.7 – 12.7 mm (11/32" – 1/2")	3.5 m (11' 5 13/16")
				2.5 m (8' 2 7/16)		941.24.825
			3.5 m (11' 5 13/16")	941.24.835		
	Rubber buffer, for wall profile, 28 x 21 mm (1 1/8" x 7/8")	Plastic	black	Tempered glass: 8 – 12 (12.7 mm) (5/16" – 1/2")	2.5 m (8' 2 7/16)	941.24.081
					laminated glass: 8.7 – 12.7 mm (11/32" – 1/2")	3.5 m (11' 5 13/16")
	Centering door stop, for wall profile	Plastic	black	8 – 12.7 mm (5/16" – 1/2")		-
	Centering door stop, for glass doors	Plastic	grey	8 – 12.7 mm (5/16" – 1/2")	-	941.24.042

Dimensional data not binding. We reserve the right to alter specifications without notice.

HAWA Individual Components


	Description	Material	Finish	Length	Item No.
	Profile, self-adhesive, for 8 – 10 mm (5/16" – 13/32") thick glass	Rubber	black	5 m (16' 4 7/8")	404.95.321
	Wall profile, undrilled	Aluminum	anodized	2.5 m (8' 2 7/16")	941.24.925
				3.5 m (11' 5 13/16")	941.24.935
	Seal for wall profile	Rubber	black	2.5 m (8' 2 7/16")	941.24.081
				3.5 m (11' 5 13/16")	941.24.082
	Centering element to wall profile, adjustable	–	–	–	941.24.043
	Centering element, for glass sliding door	Plastic	gray	–	941.24.042
	Gliders, self adhesive, for 8 mm (5/16") thick glass	Plastic	–	–	940.40.033
	Gliders, self adhesive, for 10 mm (13/32") thick glass	Plastic	–	–	940.40.034
	Lower guide channel, 24 x 24 mm (15/16" x 15/16")	Aluminum	anodized	6 m (19' 8 1/4")	940.81.600
	Door stopper, to lower guide channel (used only with 940.81.600)	Aluminum	anodized	–	940.80.051
	Lower guide channel, 20 x 20 mm (25/32" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.925
				6 m (19' 8 1/4")	941.00.960
	Floor mounted door stop, up to 250 kg (550 lbs.)	Aluminum	chrome-plated, matt	–	940.40.052

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.

Wall Centering Element

The ideal wall connection profile for all-glass sliding doors with unprotected glass edges.

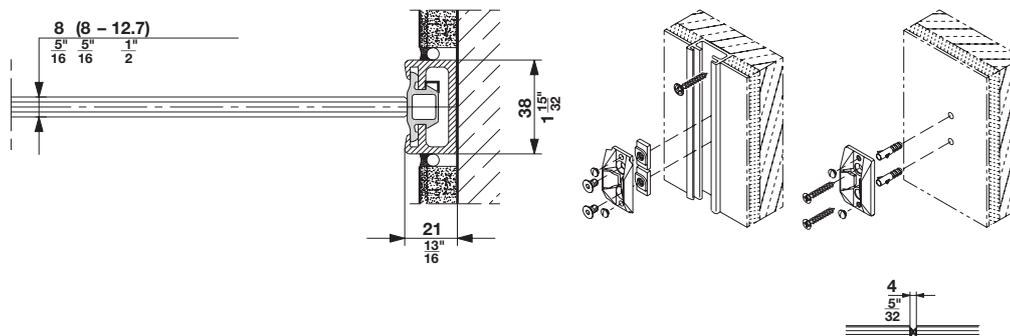

Rubber Profile for Glass Edge Protection

Self-adhesive rubber profile is recommended for glass doors that can strike against one another.