

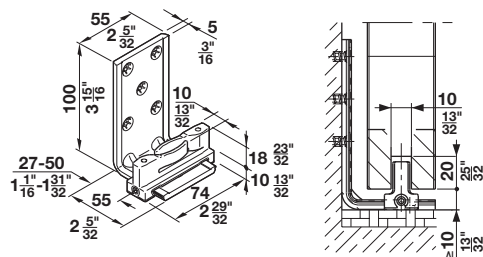


A technical line drawing of a sliding door assembly. It shows a vertical door panel on the left and a horizontal track system on the right. The track system includes a U-shaped channel with rollers inside. A double-headed arrow is positioned above the track, indicating the direction of movement. The drawing is a perspective view showing the internal components of the sliding mechanism.

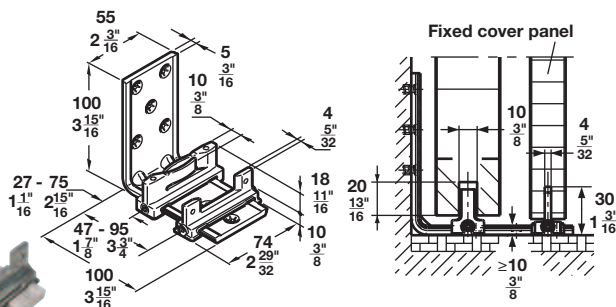



- Laterally adjustable
- Wall mounted
- Rattle-free
- Suitable for doors weighing up to: 120 kg (264 lbs.)
- Groove size: 10 mm (13/32")

Item No.
940.40.071




- Laterally adjustable
- Wall mounted
- Rattle-free
- With holding element for fixed cover panel
- Suitable for doors weighing up to: 120 kg (264 lbs.)
- Groove size: 10 mm (13/32")

Item No.
940.40.072



- Laterally adjustable
- Wall mounted
- Rattle-free
- Suitable for doors weighing up to: 250 kg (550 lbs.)
- Groove size: 14 mm (9/16")

Item No.
941.60.071

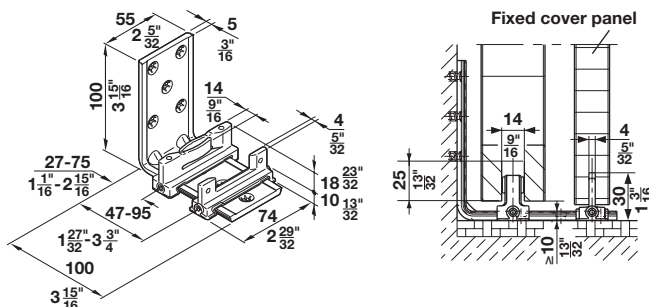

- Laterally adjustable
- Wall mounted
- Rattle-free
- With holding element for fixed cover panel
- Suitable for doors weighing up to: 250 kg (550 lbs.)
- Groove size: 14 mm (9/16")

Item No.
941.60.072

AH 1.198

Dimensional data not binding. We reserve the right to alter specifications without notice.