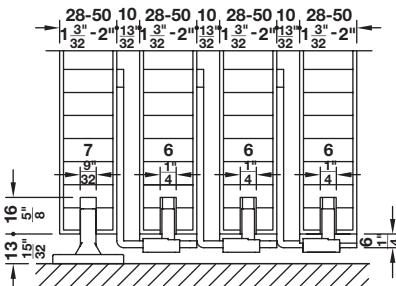
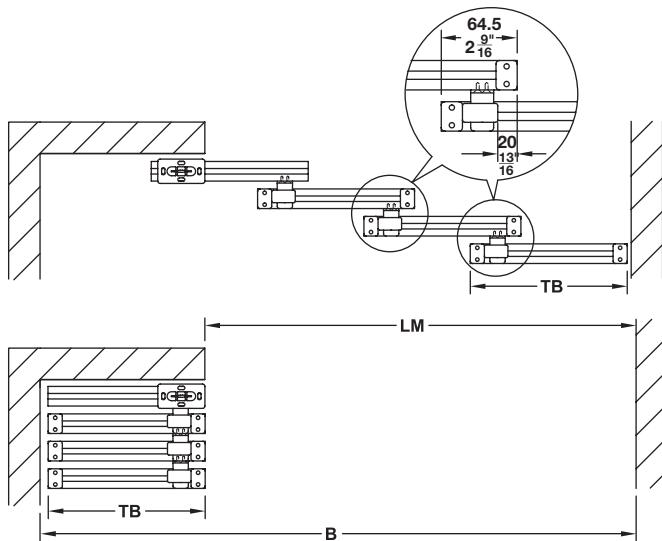


Slido Classic Additional Set for Stacking

For Slido Classic 40-P to 120-P, 40-O to 120-O and 40-I to 120-I

- For stacking 2 – 4 sliding wood doors
- Door width ≥ 700 mm (27 9/16")




TB = door width, **LM** = internal width, **B** = total width
2 doors: **TB** = $(LM + 129 \text{ mm (5 1/6")})/2$
3 doors: **TB** = $(LM + 193.5 \text{ mm (7 5/8")})/3$
4 doors (see drawing): **TB** = $(LM + 258 \text{ mm (10 5/32")})/4$

Note


The additional set can only be used in combination with the respective number of door sets (see cross reference), respective number of running tracks and panels (optional).

The use for versions with soft close is only suitable to a limited extent as a smooth opening and closing action cannot be ensured.

Stacking Sets

Description	For 2 doors	For 3 doors	For 4 doors	Item No.
 2 stoppers and 1 floor guide with bracket	1 set	2 sets	3 sets	940.44.001
 Floor guide, plastic	1 pc.	1 pc.	1 pc.	942.35.400

Upper Tracks and Fascias

Description	Area of application	Material	Finish	Length/Qty.	Item No.
 Single upper track, pre-drilled W x H: 31 x 33 mm (1 1/4" x 1 5/16")	40 – 120 kg (88-264 lbs.)	Aluminum	silver colored anodized	2 m (6' 6 3/4")	940.43.922
				3 m (9' 10 1/8")	940.43.932
				6 m (19' 8 1/4")	940.43.962
 Clip on fascia height 56 mm (2 7/32")	For upper track 1, 2, 3, 4 and 5	Aluminum	silver colored anodized	2 m (6' 6 3/4")	940.43.123
				3 m (9' 10 1/8")	940.43.133
				6 m (19' 8 1/4")	940.43.163
 Clip on fascia height 68 mm (2 11/16")	For upper track 1, 2, 3, 4 and 5	Aluminum	silver colored anodized	2 m (6' 6 3/4")	940.43.120
				3 m (9' 10 1/8")	940.43.130
				6 m (19' 8 1/4")	940.43.160

Note

End cap set is not available.

Slido Classic 240-P and 240-O Sets

- For 1 sliding door without upper track and soft close

Fitting	Item No.
240-P	942.35.002
240-O	942.35.003

Note

For 2 bi-parting sliding doors, please order 2 sets.


Set Components

	Description	Material	Finish	240-P	240-O	Item No.
	Running gear, suspension screw with nut, support flange for screw mounting	Steel	galvanized	2 pcs.	-	-
	Running gear, suspension screw with nut, support flange for hooking in (without tools), without soft close	Zinc	nickel-plated	-	2 pcs.	-
	Floor guide, 60 mm (2 3/8")	Plastic	black	1 pc.	1 pc.	-
	Track stopper with retaining spring	Plastic	gray	2 pcs.	2 pcs.	-

Note

Item numbers are valid for only 1 pc., when ordering individual components, please state the desired amount.

Upper Tracks and Accessories

	Description	Material	Finish	Length	Item No.
7	Single upper track, pre-drilled 40 x 50 mm (1 9/16" x 1 31/32")	Aluminum	clear anodized	3 m (9' 10 1/8")	942.35.630
				6 m (19' 8 1/4")	942.35.660
19	Guide channel, bottom, press-fit, for rattle-free floor guide	Aluminum	clear anodized	1 m (39 3/8")	940.42.050
				1.5 m (59")	940.42.051
				2 m (6' 6 3/4")	940.42.052
18	Floor guide, rattle-free, for wood doors with or without guide channel	Plastic	black	-	940.42.030
20	Floor guide, 60 mm (2 3/8")	Plastic	black	-	942.35.400
15	 Floor guide roller, Ø10 mm (13/32")	Steel	galvanized	-	940.42.032
16	U-shaped guide, 15 x 15 x 1.5 mm (5/8" x 5/8" x 1/16")	Aluminum	bright	6 m (19' 8 1/4")	940.42.602

Sliding door locks	pages 1.357, 1.363-1.368
Pull handles	pages 2.10-2.32
Track cleaner	page 1.37

Dimensions in mm
Inches are approximate