

HAWA Super 500/B Set

- For 1 sliding door without upper track and bottom guide channel

Order specifications:

- Type of upper track
- Upper track length
- Number of fitting sets
- Door height and width
- Door weight

	Item No.
	942.41.000


Set Components

	Description	Material	Finish	Qty.	Item No.
	Running gear, 4 wheels, M12	Steel	–	2 pcs.	942.41.014
	Suspension bracket with carrier plate, with hanger bolt, M12	Steel	galvanized	2 pcs.	942.41.024
	Floor guide	Steel	galvanized	1 pc.	942.41.031
	Door stop, spring-loaded, for heavy doors	Steel	galvanized	2 pcs.	942.30.051

Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount.
For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Dual upper track, w/mounting flanges, ceiling mounted	Stainless Steel 304	–	6 m (19' 8 1/4")	942.43.611
	Track end stopper, to be drilled into upper track Note A track stopper must be ordered to stop 2 bi-parting sliding doors in the middle.	Steel	galvanized	–	942.41.042
	Cover plate for suspension brackets	Steel	dull nickel-plated	–	942.41.072
	Cover plate for suspension brackets	Brass	brushed	–	942.41.073

Installation Plan



(Included in fitting set), mounting instructions for planning and execution available upon request.

HAWA Super 400/G

Individual Components

Order Specifications

- Upper track
- Type of lower guide or guide channel
- Door width
- Glass thickness
- Door weight
- Number of running gears (2 per door)
- Number of suspension plates (2 per door)
- Number of track stoppers (2 per door)

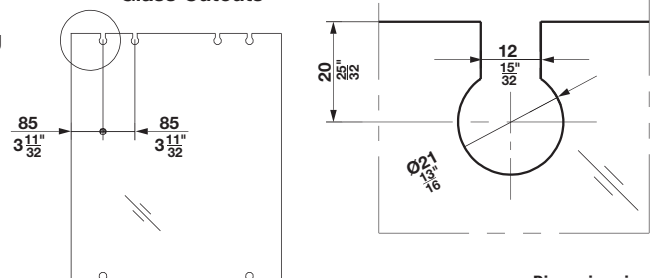
	Description	Material	Finish	Length	Item No.
	Upper guide, with mounting flanges	Steel	stainless	6 m (19' 8 1/4")	942.43.611
	Lower guide channel, 24 x 24 mm (15/16" x 15/16")	Aluminum	anodized	6 m (19' 8 1/4")	940.81.600
	Door stopper to lower guide channel	–	–	–	940.80.051
	Lower guide, with slider and suspension block	Plastic	–	–	946.12.060
	Lower guide, floor-mounted, (cannot be used in conjunction with deadbolt lock)	–	–	–	940.84.037
	Glass suspension profile 'G', 8 – 16 mm (5/16" – 5/8")	Aluminum	anodized	6.5 m (21' 3 15/16")	942.56.865
			unanodized		942.44.023
	Glass suspension profile, 8 – 16 mm (5/16" – 5/8")	Aluminum	unanodized	6.5 m (21' 3 15/16")	946.51.965
	Running gear	Wheels: Steel	–	–	942.41.014
	Suspension plate, with suspension bolt M12	Steel	galvanized	–	943.07.020
	Track stopper, to be drilled into upper track	Steel	galvanized	–	942.41.042
	Cover cap, for glass suspension profile "G"	Plastic	anthracite gray	–	942.56.029
	Cover cap, for glass suspension profile	Rubber	gray	–	946.50.020
	Glass holder insert, with M6 x 30 mm (1 3/16") screw	Plastic	–	–	940.84.024
	Cover cap for glass suspension/retainer profile	Plastic	anthracite gray	–	942.44.061

Note

It is important that the heavy glass sliding door isn't stopped only at one point, but at least at two points (top and bottom). It is to stop the door along the whole height. Please use recommended wall profile and rubber seal.

Locks	page 1.357
Glass edge protection profile	page 1.291
Finishes	page 1.286
Wall profile	page 1.290
Rubber seal	page 1.290

Glass Cutouts



Dimensions in mm
Inches are approximate