




HAWA Super 250/A
Individual Components

Order specifications:

- Type of upper track
- Upper track length
- Number of running gears
- Number of suspension plates
- Number of track stoppers
- Door height and width
- Door weight
- Type of bottom guide

	Description	Material	Finish	Length	Item No.
	Upper track, wall-mounted	Stainless Steel 304	–	6 m (19' 8 1/4")	942.42.601
	Upper track, with mounting flanges, ceiling-mounted	Stainless Steel 304	–	6 m (19' 8 1/4")	942.43.601
	Running gear, M12	Steel	–	–	942.44.012
	Suspension plate with hanger bolt, M12	–	–	–	942.44.022
	Track end stopper, to be drilled into upper track	Steel	galvanized	–	942.42.041
	Floor guide	Steel	galvanized	–	942.41.031
	Door stop, spring-loaded, for heavy doors	–	–	–	942.30.051

Dimensional data not binding. We reserve the right to alter specifications without notice.

HAWA Super 250/G

Individual Components

Order Specifications

- Upper track
- Type of lower guide or guide channel
- Door width
- Glass thickness
- Door weight
- Number of running gears (2 per door)
- Number of suspension plates (2 per door)
- Number of track stoppers (2 per door)


	Description	Material	Finish	Length/Qty	Item No.
	Upper track, side-drilled	Steel	stainless	6 m (19' 8 1/4")	942.42.601
	Upper track, with mounting flanges	Steel	stainless	6 m (19' 8 1/4")	942.43.601
	Lower guide channel, pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Connecting pin, notched	Steel	galvanized	–	946.12.090
	Lower guide, with plastic slider and suspension block	–	–	–	946.12.060
	Lower guide, rattle-free, for 8, 10, 12 and 12.7 mm (5/16", 13/32", 15/32" and 1/2") thick glass	–	–	–	940.40.032
	Floor guide, for bottom support and glass suspension profile	–	–	1 pc.	940.84.037
	Glass suspension profile 'G', 8 – 16 mm (5/16" – 5/8")	Aluminum	anodized	6.5 m (21' 3 15/16")	942.56.865
			unanodized		942.44.023
	Cover cap for glass suspension/retainer profile	Plastic	anthracite gray	–	942.44.061
	Running gear	Wheels: Steel	–	–	942.44.012
	Suspension plate, with suspension bolt M12	–	–	–	942.44.020
	Track stopper, to be drilled into upper track	Steel	galvanized	–	942.42.041
	Buffer, screw-on type	Rubber	black	–	941.60.051
	Cover cap, for glass suspension profile	Plastic	anthracite gray	–	942.56.029
	Glass holder insert, with M6 x 30 mm (1 3/16") screw	Plastic	–	–	940.84.024

Installation Plan

(included in fitting set), mounting instructions for planning and execution available upon request.

Locks	page 1.357
Glass edge protection profile	page 1.291
Finishes	page 1.286

Glass Cutouts

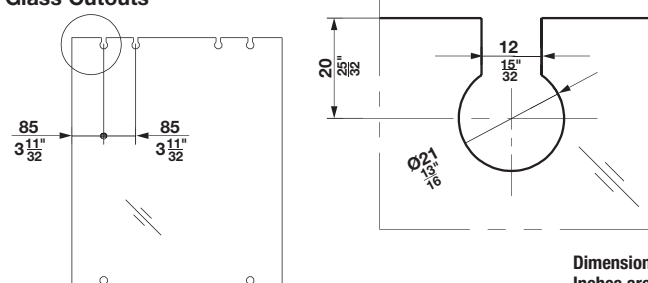




Dimensions in mm
Inches are approximate

HAWA Super 250/M

Individual Components

Order Specifications:

- Number of running gears
- Number of suspension plates
- Number of track stoppers
- Upper track length
- Lower guide channel length
- Door height and width
- Door weight
- Type of lower guide

	Description	Material	Finish	Length	Item No.
	Running gear with ball bearing wheels	Steel	–	–	942.44.012
	Suspension plate with bolt, M12	Steel	galvanized	–	942.44.026
	Upper track stopper to be drilled into upper track	–	–	–	942.42.041
	Lower guide with M10 threaded bolt	–	–	–	942.07.030
	Lower guide, floor mounted	Plastic	gray	–	942.44.030
	Buffer, screw-mounted	Rubber	black	–	941.60.051
	Lower guide channel, 20 x 20 x 3 mm (13/16" x 13/16" x 1/8")	Aluminum	anodized	6 m (19' 8 1/4")	941.00.960
				2.5 m (8' 2 7/16")	941.00.925
	Lower guide channel, pre-drilled	Aluminum	anodized	6 m (19' 8 1/4")	946.03.600
	Connecting pin, notched	Steel	galvanized	–	946.12.090
	Upper track, side-drilled	Stainless Steel	–	6 m (19' 8 1/4")	942.42.601
	Upper track, with mounting flanges	Stainless Steel	–	6 m (19' 8 1/4")	942.43.601

Note

Installation plan for planning and execution available upon request.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate