

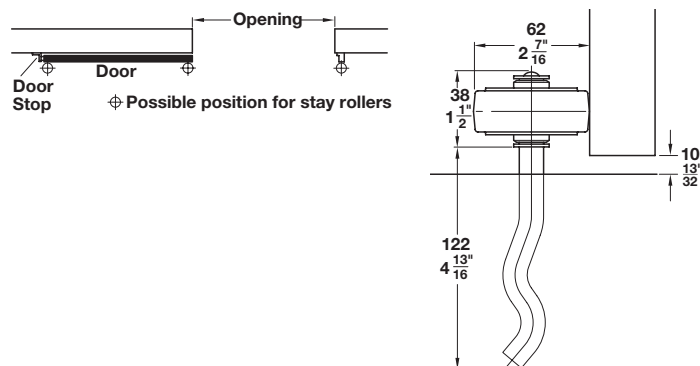
Straightaway 320






Individual Components

- Basic industrial door bottom control where floor channel cannot be installed and clear floor threshold is required

1

	Description	Material	Finish	Item No.
	Stay roller Note 3 pcs. required per panel	Steel; Wheel: Rubber	–	942.51.032



	Description	Material	Finish	Item No.
	Lockable drop bolt and socket, with locking staple Note 1 pc. required per panel	Steel	zinc-plated	942.51.090
	Door stop, heavy-duty, wall-mounted with twin buffers. For min. door thickness of 45 mm (1 3/4"). Mount mid-height of doors. Note 1 pc. required per panel	Steel	zinc-plated	942.51.050
	Mortise spring bumper Note 1 pc. required per panel	Steel	galvanized	942.30.051
	Bow handle, heavy-duty Note 1 pc. required per panel	Zinc-plated & gold passivated	–	942.51.060
	Bow handle, heavy-duty Note 1 pc. required per panel	Zinc-plated	–	942.51.070
	Flush pull handle, 150 x 67 mm (5 7/8" x 2 5/8"). For interior side of door or opposite to bow handle. Note 1 pc. required per panel Fixing screws not included	Grade 316 Stainless Steel	–	910.37.100

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate