

**Straightaway 400**

**Individual Components**

	Description	Material	Finish	Length	Item No.
	Lower track, pre-drilled, 14 x 30 mm (9/16" x 1 3/16")	Brass	-	3 m (9' 10 1/8")	942.53.930
	Upper guide channel, un-drilled 48 x 43 mm (1 7/8" x 1 11/16")	Steel	galvanized	3 m (9' 10 1/8")	942.53.830
	Lower running gear, wheel with ball bearing, for 400 kg (880 lbs.) heavy doors	Casing: Die-cast Wheel: Steel	-	-	942.53.010
	Upper guide, with 2 horizontal offset wheels, rattle-free	Casing: Aluminum Wheels: Neoprene	-	-	942.53.030
	Spring loaded door stop, drilled into door	Steel	galvanized	-	942.30.051
	Buffer	Rubber	black	-	941.80.050

**Brackets for Soffit Mounting of Upper Guide Channel**

	Bracket for soffit mounting	Steel	galvanized	942.53.080
	Closed end piece to bracket	Steel	galvanized	941.80.082
	Bracket for soffit mounting, lock joint type	Steel	galvanized	942.53.082

**Brackets for Parallel Wall Mounting of Upper Guide Channel**

	Double sidewall bracket for parallel wall mounting, open-end type	Steel	galvanized	941.80.080
	Closed end piece to bracket	Steel	galvanized	941.80.082
	Double sidewall bracket for parallel wall mounting, lock joint type	Steel	galvanized	941.80.801

**Brackets for Wall Mounting of Single Upper Guide Channel**


	Sidewall bracket for wall mounting, open-end type	Steel	galvanized	941.80.060
	Closed end piece to bracket	Steel	galvanized	941.80.082
	Lock joint plate	Steel	galvanized	942.52.082

**Position of mounting brackets along the upper guide channel**

Open bracket with lock joint plate across channel joints      Standard bracket centers      Open brackets

600 to 900 (23 5/8" to 35 7/16")

Open bracket with closed end piece to prevent lateral channel movement

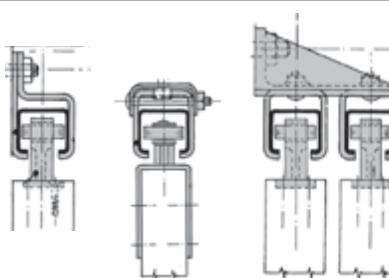

Dimensions in mm  
Inches are approximate