


HAWA 20-c Set

Order Specifications:

- Length of upper track/opening
- Set type and number of sets
- Length of lower guide channel
- Number of hinges

	Item No.
	943.02.001
	943.02.002
	943.02.003
	943.02.004
	943.02.005



Set Components

	Description:	943.02.001	943.02.002	943.02.003	943.02.004	943.02.005	Item No.
	Running gear	1 pc.	1 pc.	2 pcs.	2 pcs.	3 pcs.	942.41.014
	Suspension bracket	1 pc.	1 pc.	2 pcs.	2 pcs.	3 pcs.	943.02.022
	Lower guide bracket	1 pc.	1 pc.	2 pcs.	2 pcs.	3 pcs.	943.02.030
	Deadbolt lock	1 pc.	1 pc.	2 pcs.	2 pcs.	3 pcs.	943.04.080
	Slip-fit rose	1 pc.	1 pc.	2 pcs.	2 pcs.	3 pcs.	943.04.091
	Key to deadbolt lock	1 pc.	1 pc.	1 pc.	1 pc.	1 pc.	943.04.090

Note

Item numbers are valid only for 1 piece, when ordering individual components please state the desired amount.

Individual Components

	Description	Material	Finish	Length/Door Height	Qty./Door	Item No.
	Dual upper tracks, with mounting flanges	Stainless Steel 304	–	6 m (19' 8 1/4")	–	942.43.611
	Lower guide channel, pre-drilled 20 x 20 x 3 mm (25/32" x 25/32" x 1/8")	Aluminum	anodized	6 m (19' 8 1/4")	–	941.00.960
		Brass	–	2.5 m (8' 2 7/16")	–	941.00.925
	Lower guide channel, pre-drilled 20 x 28 x 3 mm (25/32" x 1 1/8" x 1/8")	Brass	–	6 m (19' 8 1/4")	–	943.05.600
	Ball bearing hinges, 102 x 76 mm (4" x 3")	Stainless Steel	matt	up to 2.5 m (8' 2 7/16")	3 pcs.	926.98.040
				up to 3.2 m (10' 6")	4 pcs.	–
				up to 4 m (13' 1 1/2")	5 pcs.	–
	HAWA bar bolt lock, Doorfix	Steel	galvanized	–	–	946.21.100
	Strike plate	Steel	chromium-plated, polished	–	–	946.23.910
	Dust proof strike	Steel	chromium-plated, polished	–	–	946.23.920

Installation Plan


Mounting instructions for planning and execution available upon request.

Dimensional data not binding. We reserve the right to alter specifications without notice.

HAWA Aperto 60/H

Sliding Door

Individual Components

	Item No.
	Suspension carriage with integrated mounting block and M8 screw 943.30.020
	Running gear with 2 rollers and M8 screw 943.30.012
	Suspension profile 250 x 20 x 25 mm (9 27/32" x 28/32" x 1") 943.31.125
	Cover cap for suspension profile 20 x 25 mm (25/32" x 1") Plastic, anthracite gray 943.30.029
	Floor guide with mounting block 943.30.030
	Single bolt lock with square/hexagonal socket, clip-on escutcheon and Ø9 mm (11/32") bolt/guide pin 943.31.083
	Single bolt lock for 17 mm (11/16") profile cylinder, with Ø9 mm (11/32") bolt/guide pin 943.31.082
	Single bolt lock with square/hexagonal socket, clip-on escutcheon and Ø9 mm (11/32") bolt 943.31.080
	Single bolt lock for 17 mm (21/32") profile cylinder, with Ø9 mm (11/32") bolt 943.31.081
	Strike plate for 9 mm (11/32") bolt 943.31.090
	Socket key for bolt lock 943.04.090

Pivot Door

Individual Components

	Item No.
	Suspension profile 250 x 20 x 25 mm (9 27/32" x 28/32" x 1") 943.31.125
	Cover cap for suspension profile 20 x 25 mm (25/32" x 1") Plastic, gray 943.30.029
	Top pivot bearing for parallel parking area 943.30.022
	Pivot bearing for 90 mm (3 1/2") parking area 943.30.023
	Bottom pivot bearing for guide channel 943.30.032
	Bottom pivot bearing with thrust 2 bearing sleeve 20 mm (25/32") 943.30.033
	Adapter piece for inner running track Length: 300 mm (11 13/16") 943.30.090
	Adapter piece for outer running track Length: 300 mm (11 13/16") 943.30.091
	Mounting plate for 2 x single running track 943.30.024
	Wrench SW13 943.30.095

Note

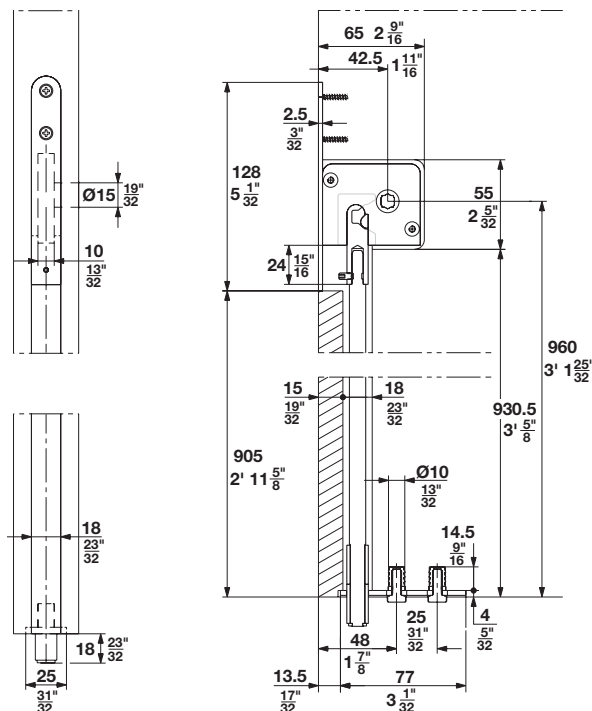
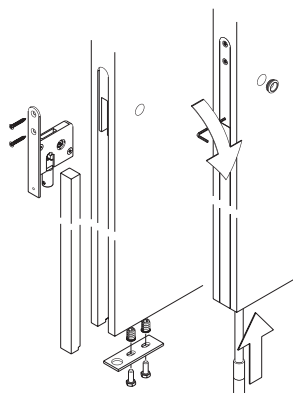
Item numbers refer to only 1 pc. or 1 set. Please specify required quantity when ordering individual parts.

Dimensional data not binding. We reserve the right to alter specifications without notice.

1

HAWA Bar Bolt

- Backset: 42.5 mm (1 11/16")
- Throw: 18 mm (3/4")
- Operation height: 960 mm (37 13/16")
- Locks and secures partition walls
- Operation with square or hexagonal key from the face of the door or with a thumbturn



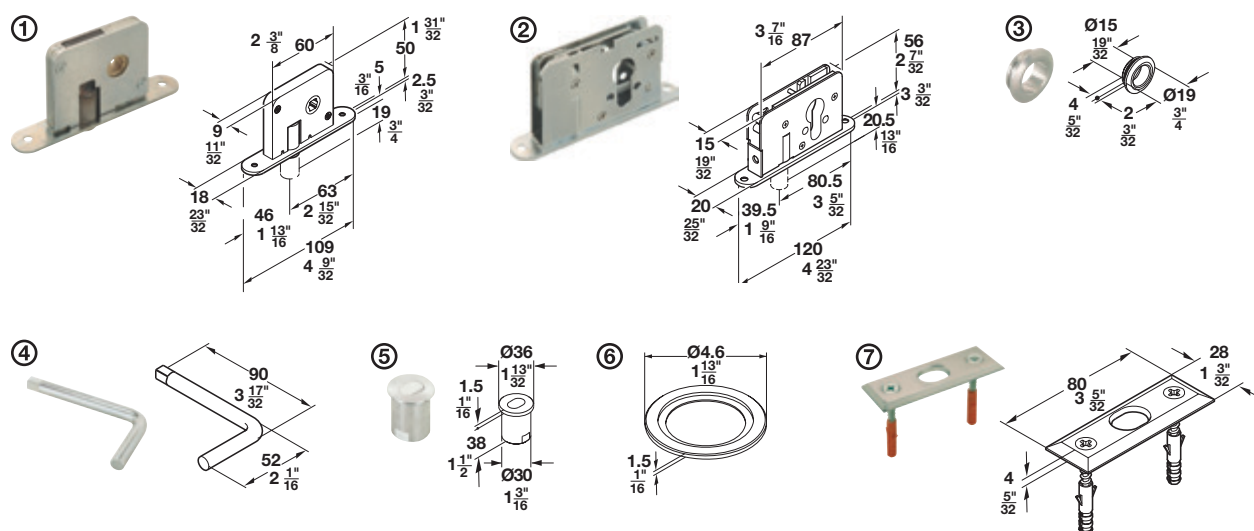
	Description	Material	Finish	Item No.
	Bar bolt Lock	Steel	galvanized	943.04.084
	Thumbturn for door thickness of 35 to 40 mm (1 3/8" to 1 9/16")	–	chrome-plated	946.22.950
	Thumbturn for door thickness of 41 to 57 mm (1 5/8" to 2 1/4")	–	chrome-plated	946.22.951
	Key for deadbolt lock	Steel	galvanized	943.04.090
	Slip-fit rosette	Brass	dull nickel-plated	943.04.091
	Dust proof strike with spring-loaded cover	–	chromium-plated	946.23.920
	Rosette for dust proof strike above	–	chromium-plated	946.23.921
	Strike plate with oblong hole	Steel	chromium-plated	946.23.910

Dimensions in mm
Inches are approximate

AH 1.202

www.hafele.com/us


Deadbolt Locks




Description	Material	Finish	Item No.
1 Deadbolt lock	Steel	galvanized	943.04.080
2 Deadbolt lock, 17 mm profile cylinder	Steel	galvanized	943.04.081
3 Slip-fit rosette	Brass	dull nickel-plated	943.04.091
4 Key to deadbolt lock	Steel	galvanized	943.04.090
5 Dust proof strike with spring-loaded cover	Steel	chromium-plated	946.23.920
6 Rosette to dust proof strike 946.23.920	—	—	946.23.921
7 Strike plate with oblong hole	Steel	chromium-plated	946.23.910

HAWA Doorfix Sealing Profile

- Prevents noisy impact
- Prevents damages to the front edges of the door
- Seals the closed door



	Material	Finish	Length	Item No.
 Sealing profile, drilled	Aluminum	clear anodized	6 m (19' 8 1/4")	946.24.600
 Profile	Rubber	black	20 m (65' 7 7/16")	946.24.020

Dimensions in mm
Inches are approximate