
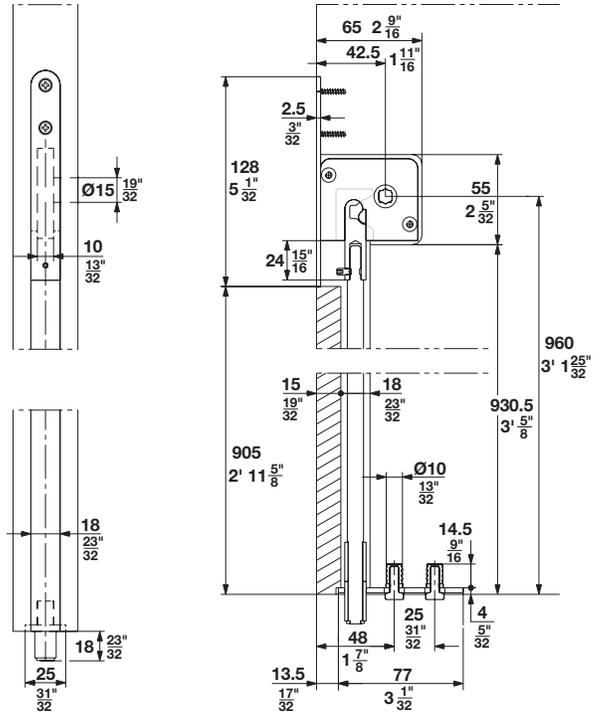


1

HAWA Bar Bolt

- Backset: 42.5 mm (1 11/16")
- Throw: 18 mm (3/4")
- Operation height: 960 mm (37 13/16")
- Locks and secures partition walls
- Operation with square or hexagonal key from the face of the door or with a thumbturn

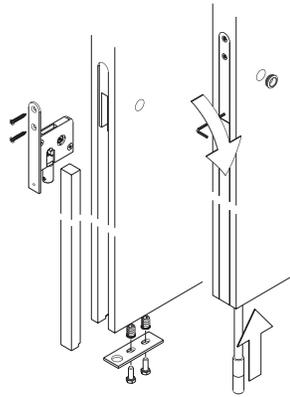

Description	Material	Finish	Item No.
 Bar bolt Lock	Steel	galvanized	943.04.084
 Thumbturn for door thickness of 35 to 40 mm (1 3/8" to 1 9/16")	-	chrome-plated	946.22.950
 Thumbturn for door thickness of 41 to 57 mm (1 5/8" to 2 1/4")	-	chrome-plated	946.22.951
 Key for deadbolt lock	Steel	galvanized	943.04.090
 Slip-fit rosette	Brass	dull nickel-plated	943.04.091
 Dust proof strike with spring-loaded cover	-	chromium-plated	946.23.920
 Rosette for dust proof strike above	-	chromium-plated	946.23.921
 Strike plate with oblong hole	Steel	chromium-plated	946.23.910

Dimensions in mm
Inches are approximate

AH 1.202

www.hafele.com/us