
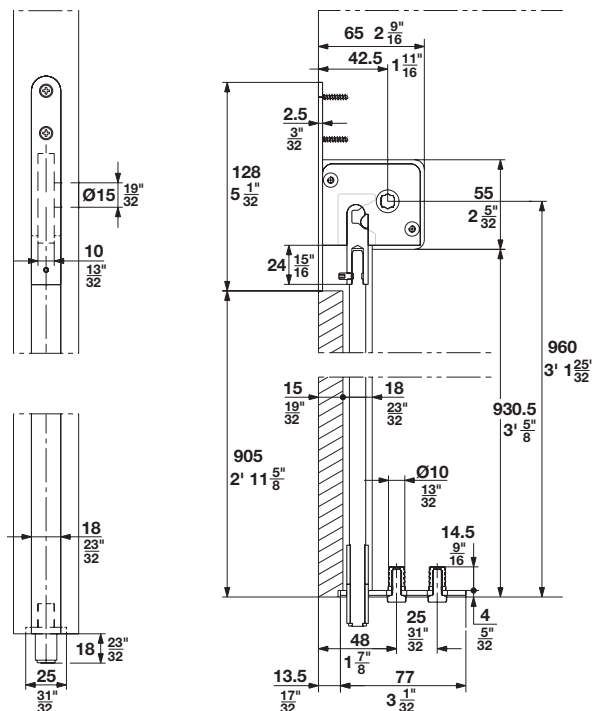


1

HAWA Bar Bolt

- Backset: 42.5 mm (1 11/16")
- Throw: 18 mm (3/4")
- Operation height: 960 mm (37 13/16")
- Locks and secures partition walls
- Operation with square or hexagonal key from the face of the door or with a thumbturn

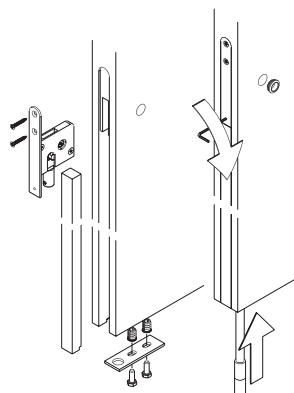


Description	Material	Finish	Item No.
 Bar bolt Lock	Steel	galvanized	943.04.084
 Thumbturn for door thickness of 35 to 40 mm (1 3/8" to 1 9/16")	–	chrome-plated	946.22.950
 Thumbturn for door thickness of 41 to 57 mm (1 5/8" to 2 1/4")	–	chrome-plated	946.22.951
 Key for deadbolt lock	Steel	galvanized	943.04.090
 Slip-fit rosette	Brass	dull nickel-plated	943.04.091
 Dust proof strike with spring-loaded cover	–	chromium-plated	946.23.920
 Rosette for dust proof strike above	–	chromium-plated	946.23.921
 Strike plate with oblong hole	Steel	chromium-plated	946.23.910

Dimensions in mm
Inches are approximate

AH 1.202

www.hafele.com/us


Deadbolt Locks

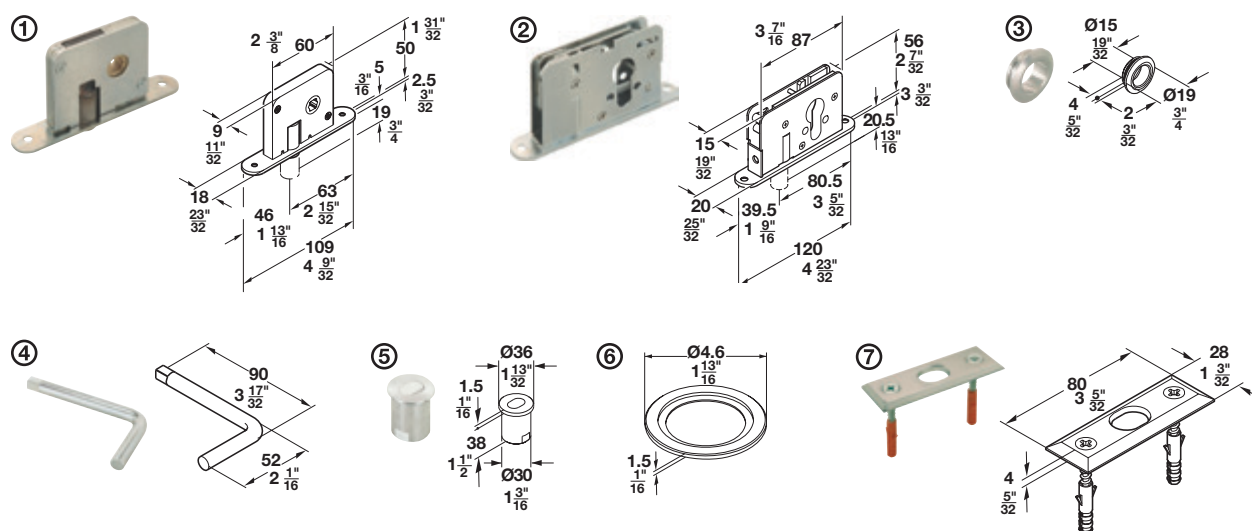


Description	Material	Finish	Item No.
1 Deadbolt lock	Steel	galvanized	943.04.080
2 Deadbolt lock, 17 mm profile cylinder	Steel	galvanized	943.04.081
3 Slip-fit rosette	Brass	dull nickel-plated	943.04.091
4 Key to deadbolt lock	Steel	galvanized	943.04.090
5 Dust proof strike with spring-loaded cover	Steel	chromium-plated	946.23.920
6 Rosette to dust proof strike 946.23.920	—	—	946.23.921
7 Strike plate with oblong hole	Steel	chromium-plated	946.23.910

HAWA Doorfix Sealing Profile

- Prevents noisy impact
- Prevents damages to the front edges of the door
- Seals the closed door



	Material	Finish	Length	Item No.
 Sealing profile, drilled	Aluminum	clear anodized	6 m (19' 8 1/4")	946.24.600
 Profile	Rubber	black	20 m (65' 7 7/16")	946.24.020

Dimensions in mm
Inches are approximate