
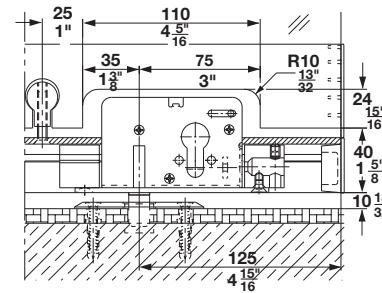


Locks

- For glass suspension profile 'G'
- Requires a cutout in glass



Description	Material	Finish	Item No.
Deadbolt lock, for profile cylinder, 17 mm (11/16")	Steel	galvanized	943.28.010
Deadbolt lock with guide roller for profile cylinder, 17 mm (11/16")	Steel	galvanized	946.50.010

Note

Template for lock cutout in suspension profile provided upon request.

Accessories

Description	Material	Finish	Item No.
Dust proof strike, with oblong hole, spring activated	Brass	chrome-plated	946.23.920
Rosette to dust proof strike 946.23.920	Brass	chrome-plated	946.23.921
Strike plate, with oblong hole	Steel	chrome-plated	946.23.910
Strike plate, with rectangle-shaped hole	Aluminum	anodized	941.61.091
Thumb-turn, with 7 mm (9/32") square spindle	Aluminum	chrome-plated	946.22.950
Security rose, for profile cylinder	Steel	chrome nickel	946.31.900
European profile cylinder, 64 mm (2 1/2"), Schlage C keyway, keyed differently	Chrome	dull nickel-plated	916.90.500
European profile cylinder, single and thumb turn, 64 mm (2 1/2") Schlage C keyway, keyed differently	Chrome	dull nickel-plated	916.19.101