


Fittings for folding walls

Folding walls are used to subdivide rooms. Pushing a folding wall to one side and stacking the doors provide unrestricted access.


Suspension at the side of the door

The doors are connected to each other with hinges. The doors can be stacked at the right and/or the left hand side.

In the open position, the doors are at an angle of 90° to the closed wall below the running track. If the suspension point is in the centre of the door width, a bottom guide is not necessary, if the system is operated carefully. The suspension point can be at the side edge, near the side edge or in the centre of the door, depending on the fitting.

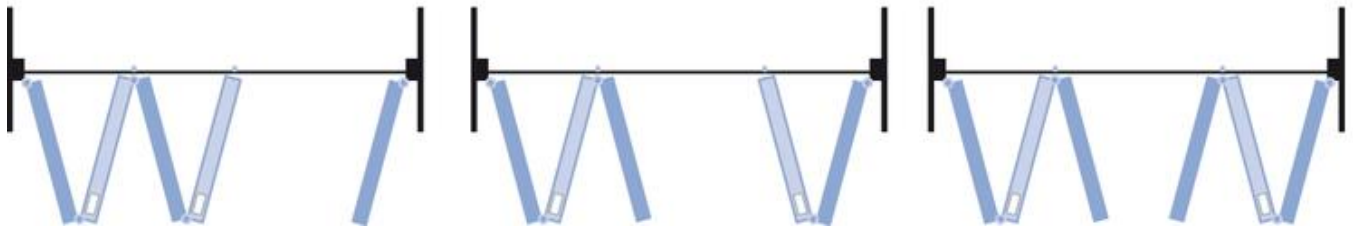

Suspension at the side edge

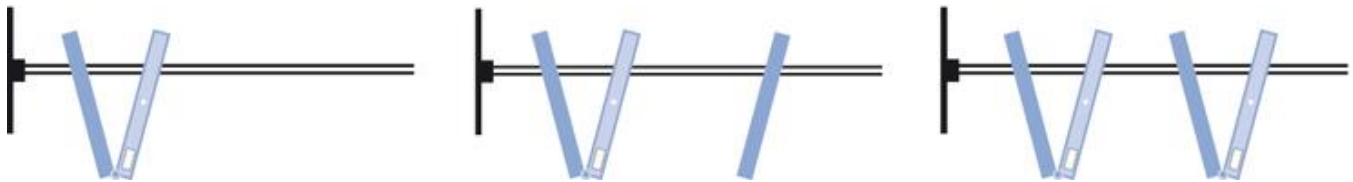

Suspension near the side edge



Suspension in the centre of the door