

3600 Series



Hager 3600 Series Grade 2 tubular lockset provides the necessary security and dependability of a commercial lock with a more residential look. It is well suited for medium duty commercial or heavy duty residential applications such as multi-family housing.





3600 SERIES - HOW TO ORDER

3653	ADJ	US3	US26	ARC	SCC	KD	ASA	TW
Function 10 - Passage 17 - Single Dummy 40 - Privacy 53 - Entry/Office 70 - Classroom 80 - Storeroom		Interior Finish (If Different)		Conventional Keyway SCC - Schlage C AR1 - Arrow C60 - Corbin 60 C67 - Corbin 67 C77 - Corbin 77 CL4 - Corbin L4 SCE - Schlage E SCF - Schlage F H1 - Hager 1 H2 - Hager 2 H3 - Hager 3 KW1 - Kwikset RD1 - Russwin D1 SGT - Sargent LA YAP - Yale E1R (Para) YGA - Yale GA WE - Weiser E NC - No Cylinder (SFIC Housing Only)		Strike ASA (Standard) Full Lip RC Full Lip TEE		Options TW - Tactile Warning 6PKEY - 6-pin Keyed 7PKEY - 7-pin Keyed SFIC* - Small Format Interchangeable Core Prep
Backset/Faceplate 2-3/8" (60 mm) - 2-3/4" (70 mm), SC Adjustable (standard) 2-3/8" (60 mm) - 2-3/4" (70 mm), RC Adjustable		Finish US3 US4 US10 US10B US26 US26D		Lever Style ARC - Archer Lever AUG - August Lever WTN - Withnell Lever		Keying KA - Keyed Alike KD - Keyed Different MK - Master Key CMK - Construction Master Key SK - Customer Specified Keying 0BC - "0" Bitted Cylinder (Conventional Only) 1BC - "1" Bitted Cylinder (Conventional Only)		
Product Group 36 - Tubular, Grade 2								

Notes:

1. If masterkeyed, include completed master key form with order (available on page 88 or www.hagerco.com).
2. For additional keying information, please refer to cylinder, core, and keying section of catalog (page 73).

* Small format interchangeable core sold separately. Available in Best Keyways (A Standard) or Hager Keyways (optional).

Ordering example: 3653 ADJ 2-3/8" to 2-3/4" US26D WTN NC ASA SFIC






3600 SERIES - FUNCTION CHART

	Function	Function No.	Function Description	ANSI No.
Non-Keyed				
	Passage	10	Latchbolt operated by lever from either side at all times.	F75
	Dummy - Single	17	Pull one side, no mechanical operation.	-
	Privacy	40	Latchbolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside or operating inside lever.	F76B
Keyed				
	Entry/Office	53	Deadlocking latchbolt operated by lever from either side except when outside lever is locked by push button on inside. When outside lever is locked, operating key in outside lever unlocks locking device. Locking device shall automatically release when inside lever is operated. Closing door does not release push button.	F82A
	Classroom	70	Deadlocking latchbolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latchbolt is operated by inside lever.	F84
	Storeroom	80	Deadlocking latchbolt operated by key in outside lever, or by operating inside lever. Outside lever is always locked. Inside lever is always unlocked.	F86




3600 SERIES - LEVER OPTIONS


ARCHER LEVER

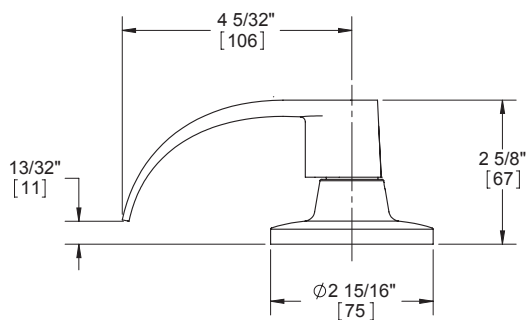

AUGUST LEVER

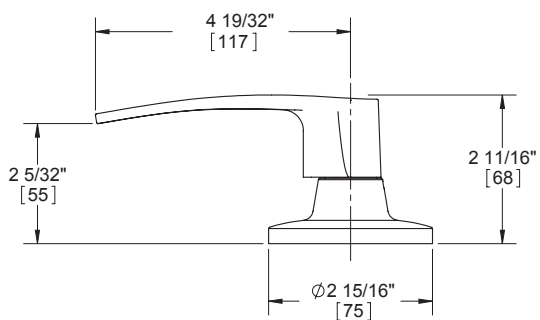

WITHNELL LEVER

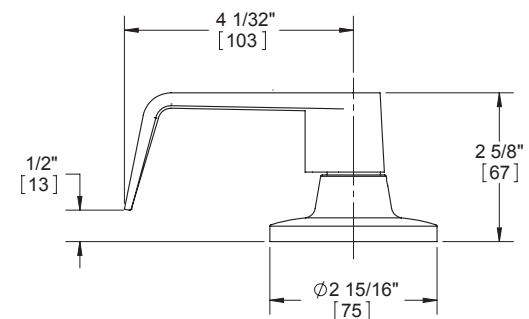

Notes: Optional tactile warning available on all lever styles (only outside lever will include raised surfaces unless otherwise specified).





3600 SERIES - GRADE 2 TUBULAR


WARRANTY	Five-year warranty
FEATURES	• Heavy duty residential - medium duty commercial • No exposed mounting screws • Non-handed • Conventional cylinder or Small Format Interchangeable Core option available
Certifications:	• BHMA Certified ANSI A156.2 Series 4000 Grade 2 • ADA Compliant ANSI A117.1 Accessibility Code • UL/cUL Listed for all functions up to 3 hours for "A" label single doors • UL10C Positive Pressure Rated • UL10B Neutral Pressure Rated
Lever Options:	Archer, August, Withnell levers
Options:	• Tactile warning • Split finish
SPECIFICATIONS	
Standard Door Prep:	• 2-1/8" (54 mm) diameter (bore) • Latch hole: 1" (25 mm) diameter (cross bore)
Exposed Trim:	• Levers: Cast zinc • Rose: Wrought brass
Rose Diameter:	2-15/16" (75 mm)
Lock Chassis:	Heavy gauge steel, zinc dichromated
Keys:	Two operating keys supplied per lock
Cylinders/Cores:	• Brass - keyed different - Schlage C Keyway - Standard • Cylinder drilled 6-pin, keyed 5-pin - Standard • Other keying options, including keyed 6-pin, available from factory (see cylinder, core and keying section) • Small Format Interchangeable Core option available • SFIC uncombined or combined, brass 6- or 7-pin cores sold separately
Door Thickness:	1-3/8" - 1-3/4" (35 mm - 45 mm)
Backset:	• Adjustable 2-3/8" - 2-3/4" (60 mm - 70 mm) • Preset at factory for 2-3/8" (60 mm)
Latchbolt:	• 1/2" (13 mm) throw, stainless steel • 1" x 2-1/4" (25 mm x 57 mm) faceplate • Square corner faceplate standard, round corner available • Deadlocking latchbolt prevents manipulation when door is closed; keyed functions only
Strike:	3935 ASA 1-1/4" x 4-7/8" (32 mm x 124 mm) strike - Standard
Functions:	10 Passage, 17 Dummy, 40 Privacy, 53 Entry, 70 Classroom, 80 Storeroom
FINISHES	US3, US4, US10, US10B, US26, US26D





3600 SERIES LATCHBOLTS

Adjustable Backset Spring Latches



- 3951**
2-3/8" (60 mm) - 2-3/4" (70 mm)
Adjustable Backset
Spring Latch - Standard
- Square corner
 - 1" x 2-1/4" (25 mm x 57 mm) faceplate
 - For use with Passage/Privacy functions



- 3953**
2-3/8" (60 mm) - 2-3/4" (70 mm)
Adjustable Backset
Spring Latch
- Round corner
 - 1" x 2-1/4" (25 mm x 57 mm) faceplate
 - For use with Passage/Privacy functions

5" Backset Spring Latches



- 3939**
5" (127 mm) **Backset**
Spring Latch
- Square and round corner available
 - 1" x 2-1/4" (25 mm x 57 mm) faceplate
 - For use with Passage/Privacy functions

Adjustable Backset Dead Latches



- 3952**
2-3/8" (60 mm) - 2-3/4" (70 mm)
Adjustable Backset
Dead Latch - Standard
- Square corner
 - 1" x 2-1/4" (25 mm x 57 mm) faceplate
 - For use with all keyed functions



- 3954**
2-3/8" (60 mm) - 2-3/4" (70 mm)
Adjustable Backset
Dead Latch
- Round corner
 - 1" x 2-1/4" (25 mm x 57 mm) faceplate
 - For use with all keyed functions

5" Backset Dead Latches



- 3938**
5" (127 mm) **Backset**
Dead Latch
- Square and round corner available
 - 1" x 2-1/4" (25 mm x 57 mm) faceplate
 - For use with all keyed functions

Optional Drive-In Latchbolts



- 3914**
2-3/8" (60 mm) - 2-3/4" (70 mm)
Adjustable Backset
Spring Latch
- For use with Passage/Privacy functions



- 3915**
2-3/8" (60 mm) - 2-3/4" (70 mm)
Adjustable Backset
Dead Latch
- For use with all keyed functions

3600 SERIES STRIKES



- 3933**
T-Strike with Plastic Dust Box
- 1-1/8" x 2-3/4" (29 mm x 70 mm)
 - Dust box included



- 3934**
Full Lip Strike
1-5/8" x 2-1/4" (41 mm x 57 mm)



- 3935**
ASA Strike - Standard
- 1-1/4" x 4-7/8" (32 mm x 124 mm)
 - 1-5/16" lip
 - Other lengths available upon request



- 3958**
Full Lip Strike with Round Corner
- 1-5/8" x 2-1/4" (41 mm x 57 mm)
 - 1/4" radius



- 3959**
Faceplate Adapter
- Converts 1" (25 mm) to 1-1/8" (28 mm) width
 - Supplied standard with 3600 Series

