



POCKET - 9878 PACKAGED SETS

FEATURES

- Extra heavy duty aluminum box track and hardware
- Conforms to ANSI A156.14
- Type: D8681, D8711



SPECIFICATIONS

- For doors 1-3/8" - 1-3/4" (35 mm - 44 mm) thick
- Up to 250 lbs (113 kg) per door
- Track is extruded aluminum jump-proof style with "V" shaped rails
- Hangers have four 1-1/4" (32 mm) diameter wheels

Part Number	Description
9878 Series Set Includes one (1) 9801 track and one (1) 9742 parts bag	
9878-72	Pocket Door Set - 6' (1829 mm) for 3'0" (914 mm) door
9878-96	Pocket Door Set - 8' (2438 mm) for 4'0" (1219 mm) door

TRACKS - 0.075" (1.9 mm) thick aluminum

Part Number	Description
Tracks for use with 9801 Series	
9801-72	72" (1829 mm) Aluminum Box Track
9801-96	96" (2438 mm) Aluminum Box Track
9801-120	120" (3048 mm) Aluminum Box Track
9801-144	144" (3658 mm) Aluminum Box Track
9801-192	192" (4877 mm) Aluminum Box Track

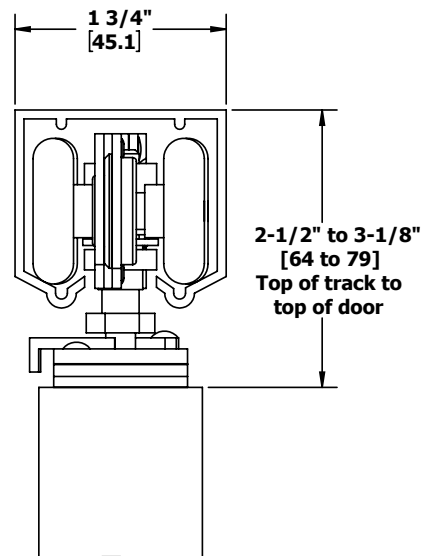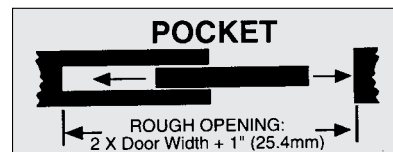

Interchanges with Stanley 57/58.





POCKET - 9878 TRACK COMPONENTS



9801

Extra Heavy Duty Box Track

Materials: Extruded aluminum
 Gauge: 0.075" (1.9 mm)
 Track: 1-5/8" x 1-3/4"
 (41 mm x 44 mm)
 Lengths: 72" (1829 mm) to 192"
 (4877 mm)
 Notes:

- For doors up to 250 lbs (113 kg)
- Jump proof twin channel design



3835

Small Case Deadlock

Thumbturn: Meet ADA Requirements, "No pinch," No grasp."
 Lock Case: Heavy wrought steel with zinc dichromate finish - 4-5/16" x 3-9/16" x 1" (110 mm x 90 mm x 25 mm)
 Armor Front: 1-1/4" x 5-5/8" x 7/32" (32 mm x 143 mm x 5 mm)
 Keys: Two operating keys supplied per lock
 Cylinder:

- Brass - keyed different - C keyway - Standard
- Other keying options, including keyed 6-pin, available from factory
- SFIC uncombined or combined, brass 6- or 7-pin sold separately
- Drilled 6-pin, keyed 5-pin - Standard
- Small Format Interchangeable Core housing available
- Schlage "L" cam - Standard

 Door Thickness:

- 1-3/8" - 2-1/2" (35mm-64mm) - steel door
- 1-3/4" - 2-1/2" (45mm-64mm)- wood door
- Must specify door thickness if greater than 1-3/4" (45mm)

 Backset: 2-3/4" (70 mm) only
 Deadbolt: 1" (25 mm) throw - stainless steel
 Strike: 1 1/8" wide x 3 1/2" (29mm x 89mm) NO LIP
 Finishes: US26D
 Functions: 35-Cylinder x Thumbturn, 36-Single Cylinder, 37-Double Cylinder, 38-Thumbturn Only, 39-Thumbturn w/ Emergency Key



9742

Parts Bag

Includes two (2) 9827 hangers, two (2) 9883 guides, and one (1) 9881 bumper



9827

Four Wheel Ball Bearing Hanger

Materials: Zinc plated steel
 Wheels: Self aligning to allow consistent contact with track
 Wheel: 1-1/4" (32 mm) diameter
 Notes:

- For doors up to 75 lbs (34 kg)
- Pre-lubricated Celcon wheels on steel shafts with steel ball bearings
- Ball bearing axles
- For use with 9801 track



9881

Bumper

Materials: Rubber
 Stop: 1/2" diameter x 3/8" deep (13 mm x 10 mm)
 Notes: With screws



9883

Two Piece Pocket Door Guide

Materials: Polyethylene
 Guide: 1-3/16" x 3/4" x 1-1/8" (21 mm x 19 mm x 29 mm)
 Notes:

- Two pieces per door required
- Screws to jamb to guide door and prevent rubbing

Optional Components

330D	Pocket Door Latch
330L	Pocket Door Privacy Latch
330M	Pocket Door Privacy Latch
2630	Flush Cup Pull
9884	Pocket Door Edge Pull
9815	Bumper Stop
9884	Pocket Door Edge Pull
9889	Non-Adjustable Floor Guide

For optional components see pages 59-63