



## POCKET - 9850

### FEATURES

- Heavy duty pocket door kit
- Conform to ANSI A156.14
- Type: D8671, D8701


## Pocket Door Kit

### SPECIFICATIONS


- For doors 1-3/8" - 1-3/4" (35 mm - 44 mm) thick, up to 4'0" (1219 mm) wide and 8'0" (2438 mm) or 8'6" (2591 mm) high, weighing up to 250 lbs (112 kg)
- Jump proof track and rollers
- 9801 heavy duty aluminum box track
- Pre-assembled header assembly goes up quickly
- Easy door installation and removal for painting and repair
- Real wood split studs, size 3/4" x 1-5/8" (19 mm x 26 mm) length relative to height, steel encased for rigidity and to prevent fastener penetration into the pocket
- Track header unit attaches to rough framing at both ends - split studs nail or screw to track header - no connections to rough header
- 3 pair of split studs with wood inserts

Part #	Max Door Weight	Door Thickness*	Door Width	Door Height	Hanger Bearings
9850	250 lbs (57 kg)	1-3/8" - 1-3/4" (35 mm - 44 mm)	4'0" (1219 mm)	8'0" (2438 mm)	9829 Steel Ball

Installation Note: For bi-parting doors, use Hager double pocket door kit 9639 (sold separately).



Joins two pocket door frames to make one large doorway. Rough opening width changes to door width multiplied by four.

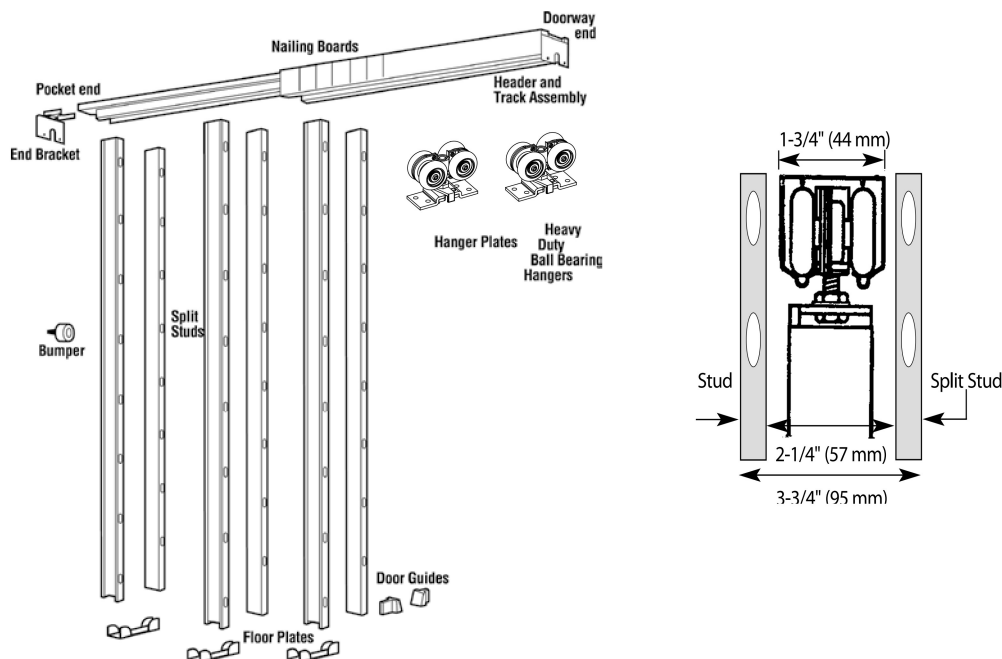

### Contents

Quantity	Description
1	Header assembly
3	Pair of split studs
2	Heavy duty hangers
2	Door hanger plates
1	Bumper
1	Pair of door guides
1	Adjusting wrench
3	Floor plates
1	Doorway end bracket
1	Pocket end bracket





## POCKET - POCKET DOOR KIT COMPONENTS



### 330D

#### Pocket Door Latch

Certification: Meets ANSI A156.14 for D0821.1

Size: 2-3/4" x 2-1/2"  
(70 mm x 64 mm)

Finger Piece: 1-3/8" (35 mm)  
extension

Materials: Brass

Finishes: US3, US5, US10B,  
US15, US15A, US19,  
US26, US26D

Fasteners: Two (2) #6 x 5/8"  
OPHWS; (2) #6 x 3/4"  
FPHWS

Notes: For use with 1-3/8" to  
1-3/4" (35 mm to  
45 mm) door



### 2610

#### Flush Cup Finger Pull

Overall Diameter: 31/32" (25 mm)

Finger Pull: 3/4" (19 mm) diameter

Depth: 5/16" (8 mm)

Projection: 1/32" (.8 mm)

Materials: Solid brass

Finishes: US3, US4, US5, US10A,  
US15, US15A, US26,  
US26D, ABA

Notes: Built-in prong design  
eliminates the need  
for screws or brads.



### 2630

#### Flush Cup Pull

Overall Diameter: 2-7/16" (62 mm)

Finger Pull: 2-1/16" (52 mm)  
diameter

Depth: 11/32" (9 mm)

Projection: 3/32" (2 mm)

Materials: Solid brass

Finishes: US3, US4, US5, US10A,  
US15, US15A, US26,  
US26D, ABA

Notes: Built-in prong design  
eliminates the need for  
screws or brads.



### 330L

#### Pocket Door Privacy Latch

Size: 2-3/4" x 2-1/2"  
(70 mm x 64 mm)

Finger Piece: 1-3/8" (35 mm)  
extension

Strike Size: 1" x 2-1/4" (25 mm x 57 mm)

Materials: Brass

Finishes: US3, US5, US10B, US15,  
US15A, US19, US26, US26D

Fasteners: Two (2) #6 x 5/8"  
OPHWS; (2) #6 x 3/4" FPHWS

Notes: For use with 1-3/8" door



### 9605

#### 4-Wheel Hanger

Materials: Steel with brass-tone  
dichromate finish

Wheel: 7/8" (22 mm) diameter

Notes:

- For doors up to 125 lbs (57 kg)
- Wheels are self aligning to allow consistent contact with track
- Pre-lubricated Celcon wheels mounted on steel ball bearing shafts
- Can be used on pivot set
- Use in conjunction with 9601 or 9602 track



### 330M

#### Pocket Door Privacy Latch

Certifications: Meets ANSI A156.14 for D0831

Size: 2-3/4" x 2-1/2"  
(70 mm x 64 mm)

Finger Piece: 1-3/8" (35 mm)  
extension

Strike Size: 1" x 2-1/4" (25 mm x 57 mm)

Materials: Brass

Finishes: US3, US5, US10B,  
US15, US15A, US19,  
US26, US26D

Fasteners: Two (2) #6 x 5/8"  
OPHWS; (2) #6 x 3/4"  
FPHWS

Notes: For use with 1-3/4" door





## POCKET - POCKET DOOR KIT COMPONENTS



### 9606

#### 4-Wheel Ball Bearing Hanger with Top Mount Plate

- Materials:** Steel with brass-tone dichromate finish
- Wheels:** 7/8" (22 mm) diameter
- Notes:**
- Self aligning to allow consistent contact with track
  - Pre-lubricated Celcon wheels mounted on steel ball bearing shafts
  - Up to 150 lbs (68 kg) per door
  - Use with 9601, 9602, or 9603 track



### 3835

#### Small Case Deadlock

- Thumbturn:** Meet ADA Requirements, "No pinch," No grasp."
- Lock Case:** Heavy wrought steel with zinc dichromate finish - 4-5/16" x 3-9/16" x 1" (110 mm x 90 mm x 25 mm)
- Armor Front:** 1-1/4" x 5-5/8" x 7/32" (32 mm x 143 mm x 5 mm)
- Keys:** Two operating keys supplied per lock
- Cylinder:**
- Brass - keyed different - C keyway - Standard
  - Other keying options, including keyed 6-pin, available from factory
  - SFIC uncombined or combined, brass 6- or 7-pin sold separately
  - Drilled 6-pin, keyed 5-pin - Standard
  - Small Format Interchangeable Core housing available
  - Schlage "L" cam - Standard
- Door Thickness:**
- 1-3/8" - 2-1/2" (35mm-64mm) - steel door
  - 1-3/4" - 2-1/2" (45mm-64mm)- wood door
  - Must specify door thickness if greater than 1-3/4" (45mm)
- Backset:** 2-3/4" (70 mm) only
- Deadbolt:**
- 1" (25 mm) throw - stainless steel
- Strike:**
- 1 1/8" wide x 3 1/2" (29mm x 89mm) NO LIP
- Finishes:** US26D
- Functions:** 35-Cylinder x Thumbturn, 36-Single Cylinder, 37-Double Cylinder, 38-Thumbturn Only, 39-Thumbturn w/ Emergency Key



### 9632

#### Parts Bag

- Includes:**
- Two (2) 9605 hangers
  - Two (2) 9883 guides
  - One (1) 9881 bumper



### 9633

#### Parts Bag

- Includes:**
- Two (2) 9606 hangers
  - Two (2) 9883 guides
  - One (1) 9881 bumper



### 9827

#### Four Wheel Ball Bearing Hanger

- Materials:** Zinc plated steel
- Wheels:** Self aligning to allow consistent contact with track
- Wheel:** 1-1/4" (32 mm) diameter
- Notes:**
- For doors up to 75 lbs (34 kg)
  - Pre-lubricated Celcon wheels on steel shafts with steel ball bearings
  - Ball bearing axles
  - For use with 9801 track

## Optional Components

- |      |                              |
|------|------------------------------|
| 9610 | Replacement Top Mount Plate  |
| 9634 | Pocket Door Adaptor Kit      |
| 9639 | Dbl. Pocket Door Adapter Kit |
| 9865 | Flush Cup Pull               |
| 9881 | Bumper                       |
| 9883 | Two Piece Pocket Door Guide  |
| 9884 | Pocket Door Edge Pull        |
| 9889 | Non-Adjustable Floor Guide   |
| 9262 | Pocket Door Keyed Lock       |
| 9877 | Door Guide                   |

For optional components see pages 59-63

