



POCKET - 9901 SERIES

FEATURES

- Extra heavy duty aluminum box track and hardware
- Conforms to ANSI A156.14
- Type: D8681



SPECIFICATIONS

- For doors 1-3/8" - 1-3/4" (35 mm - 44 mm) thick
- Up to 250 lbs (113 kg) per door
- Quick release hangers allow easy door hanging and removal
- Hangers interchange with Stanley & Johnson track and hangers
- Universal extruded aluminum track interchanges with Stanley & Johnson track and hangers
- Hangers have 1" (25 mm) diameter ball bearing wheels

Part Number	Description
9901 Series Set	Includes one (1) 9821 track and one (1) 9895 parts bag: two (2) 9825 hangers, two (2) 9883 guides, and one (1) 9881 bumper
9901-72	Pocket Door Set - 6' (1829 mm) for 3'0" (914 mm) door
9901-96	Pocket Door Set - 8' (2438 mm) for 4'0" (1219 mm) door

TRACKS - 0.06" (1.5 mm) thick aluminum

Part Number	Description
Tracks for use with 9901 Series	
9821-59	59" (1499 mm) Aluminum Box Track
9821-71	71" (1803 mm) Aluminum Box Track
9821-96	96" (2438 mm) Aluminum Box Track
9821-144	144" (3658 mm) Aluminum Box Track

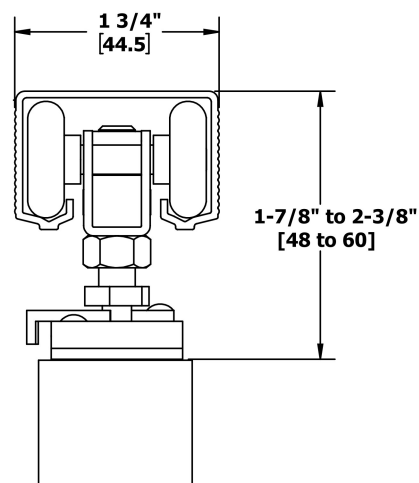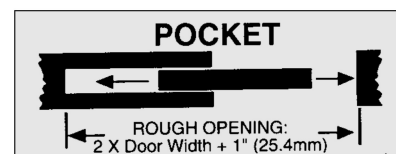

Interchanges with Stanley 125/250 Series and Johnson 100 Series.





POCKET - 9901 SERIES TRACK COMPONENTS



9821

Aluminum Box Track

Materials: Extruded aluminum
 Gauge: 0.06" (1.55 mm)
 Track: 1-5/8" x 1-1/16"
 (41 mm x 27 mm)
 Lengths: 59" (1499 mm) to 144"
 (3658 mm)
 Notes:

- For doors up to 250 lbs (113 kg)
- Jump proof twin channel design



3835

Small Case Deadlock

Thumbturn: Meet ADA Requirements, "No pinch," No grasp."
 Lock Case: Heavy wrought steel with zinc dichromate finish - 4-5/16" x 3-9/16" x 1" (110 mm x 90 mm x 25 mm)
 Armor Front: 1-1/4" x 5-5/8" x 7/32" (32 mm x 143 mm x 5 mm)
 Keys: Two operating keys supplied per lock
 Cylinder:

- Brass - keyed different - C keyway - Standard
- Other keying options, including keyed 6-pin, available from factory
- SFIC uncombined or combined, brass 6- or 7-pin sold separately
- Drilled 6-pin, keyed 5-pin - Standard
- Small Format Interchangeable Core housing available
- Schlage "L" cam - Standard

 Door Thickness:

- 1-3/8" - 2-1/2" (35mm-64mm) - steel door
- 1-3/4" - 2-1/2" (45mm-64mm) - wood door
- Must specify door thickness if greater than 1-3/4" (45mm)

 Backset: 2-3/4" (70 mm) only
 Deadbolt: 1" (25 mm) throw - stainless steel
 Strike: 1 1/8" wide x 3 1/2" (29mm x 89mm) NO LIP
 Finishes: US26D
 Functions: 35-Cylinder x Thumbturn, 36-Single Cylinder, 37-Double Cylinder, 38-Thumbturn Only, 39-Thumbturn w/ Emergency Key



9895

Parts Bag

Includes two (2) 9825 4-wheel ball bearing hangers with quick release top plate, two (2) 9883 guides, and one (1) 9881 bumper



9825

4 Wheel Ball Bearing Hanger with Quick Release Top Mount Plate

Materials: Zinc plated steel
 Wheels: Self aligning to allow consistent contact with track
 Wheel: 1" (25 mm) diameter
 Notes:

- Pre-lubricated Celcon wheels
- Up to 250 lbs (113 kg) doors
- For use with 9821 track
- Quick release feature allows easy door hanging and removal



9883

Two Piece Pocket Door Guide

Materials: Polyethylene
 Guide: 1-3/16" x 3/4" x 1-1/8" (21 mm x 19 mm x 29 mm)
 Notes:

- Two pieces per door required
- Screws to jamb to guide door and prevent rubbing



9881

Bumper

Materials: Rubber
 Stop: 1/2" diameter x 3/8" deep (13 mm x 10 mm)
 Notes: With screws

Optional Components

330D	Pocket Door Latch
330L	Pocket Door Privacy Latch
330M	Pocket Door Privacy Latch
2630	Flush Cup Pull
9559	Aligner
9815	Bumper Stop
9884	Pocket Door Edge Pull
9889	Non-Adjustable Floor Guide

For optional components see pages 59-63