


## 2904

### Description:

- Provides power and control for openings with an electrified locking device and automatic door operator
- Not suitable for use with solenoid actuated Electric Latch Retraction (ELR) exit devices
- Suitable for use with motor drive Electric Latch Retraction (MLR) exit devices

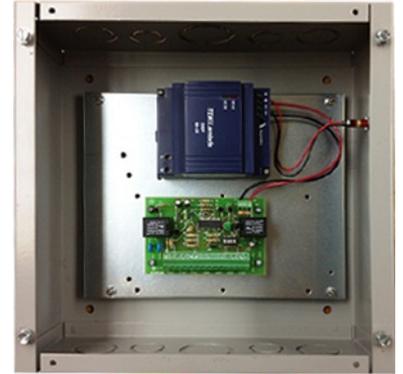

## PRODUCT SPECIFICATIONS

### FEATURES:

- Filtered and regulated 24 VDC constant voltage
- 2 AMP load capacity
- Class 2 rated outputs
- Overload, over voltage, and short circuit protection
- Automatically accepts 120 or 240 VAC input
- Fire alarm input
- Built in fail safe or fail secure locking device controller
- Built in dry contact output of automatic door operator input
- Auxiliary 24 VDC constant voltage output (1 amp max output)
- Separate input for activation switch on entry and exit side of opening
- Adjustable time delay feature

### INPUT:

- 120 VAC, 900mA, 50/60Hz
- 240 VAC, 600mA, 50/60Hz

### OUTPUT:

- 24 VDC, 2A

### CABINET:

- 4-1/4" x 10-1/4" x 10-1/4"
- 108 x 260 x 260 mm