


3200 Series

Grade 2 Deadlock

Applications:

- Auxiliary and primary locking
- Non-handed
- Conventional cylinder or Small Format Interchangeable Core housing available

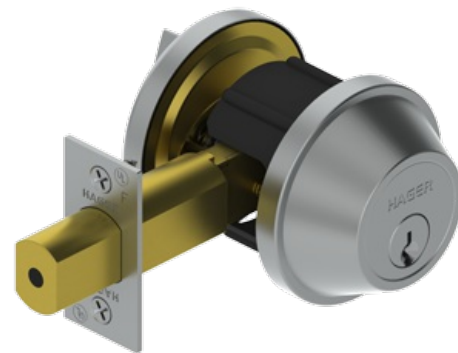

PRODUCT SPECIFICATIONS

CERTIFICATIONS:

- BHMA Certified ANSI A156.5 Grade 2
- ANSI A250.13 Severe Windstorm Resistant Component
- UL/cUL Listed for all functions up to 3 hours for "A" label single doors
- UL10C Positive Pressure Rated
- UL10B Neutral Pressure Rated
- ADA - Thumbturn
- Lifetime warranty

EXPOSED TRIM:

- Wrought brass, stainless steel or bronze

MECHANISM:

- Steel, zinc dichromate plating

KEYS:

- Two operating keys supplied per lock

CYLINDERS:

- Brass
- Keyed Different - C Keyway
- Other keying options, including keyed 6-pin, available from the factory
- SFIC uncombined or combined, brass 6- or 7-pin sold separately
- Drilled 6-pin, keyed 5-pin - Standard
- Small Format Interchangeable Core housing available

DOOR THICKNESS:

- 1-3/8" - 1-3/4" (35 mm - 45 mm) - Standard
- 1-3/4" (35 mm) Only - 3214 SFIC and 3216
- 2" - 2-1/4" (51 mm - 57 mm) available for conventional cylinder - Must specify

BACKSET:

- 2-3/4" (70 mm) - Standard
- 2-3/8" (60 mm) - Optional
- 2-3/8" - 2-3/4" (60mm - 70mm) adjustable backset supplied with 3220 and 3221 (not available on 3214 or 3215)

LATCHBOLT:

- 1" (25 mm) Throw - Brass with concealed hardened steel roller to prevent sawing or cutting
- 2-1/4" x 1-1/8" (57 mm x 29 mm) square corner faceplate

STRIKES:

- 3930 Square Corner, 1-1/8" x 2-3/4" (29 mm x 70 mm) with dustbox - Standard
- 3929 ASA Deadbolt Strike - Optional

STANDARD DOOR PREP:

- Cylinder hole: 2-1/8" (54 mm) diameter (cross bore)
- Latch hole: 1" (25 mm) diameter (edge bore)

FINISHES:

- US3, US4, US10, US10B, US26D, US32, US32D

FUNCTIONS:

- 14 - Double Cylinder, 15 - Cylinder x Thumbturn, 16 - Thumbturn x Occupancy Indicator
- 20 - Thumbturn only w/ blank plate, 21 - Thumbturn Only (Replaced 3219), 22 - Retrofit Kit for use w/ 3221 or 3219

OPTIONS:

- Split finish
- Additional deadbolts and strikes available