




LOCKS

HOW TO ORDER

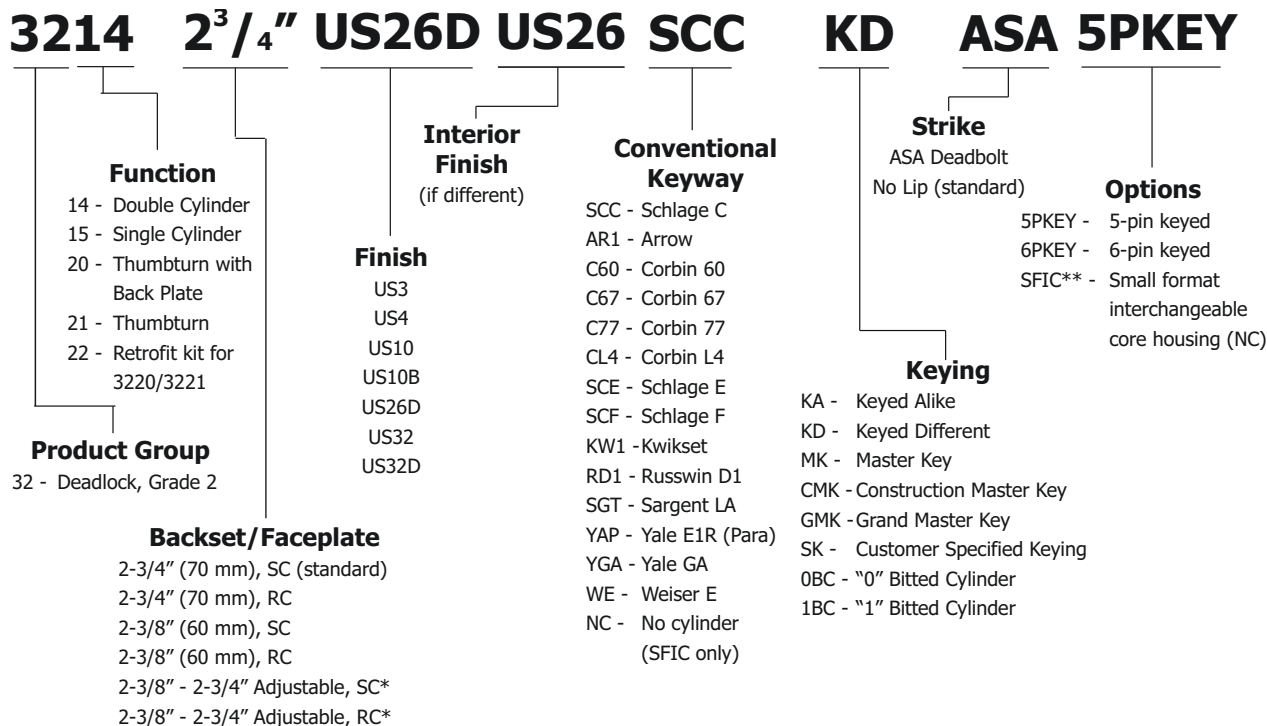

Notes:

1. If master-keyed, include master key instruction sheet with order (available on page 69 or online).
2. For additional keying information, please refer to cylinder, core, and keying section of catalog.

* Adjustable backset deadbolts supplied with 3220, 3221, and 3222.

** Small format interchangeable core sold separately. Available in Best Keyways only, A Standard.

Ordering example: 3214 2-3/4" US26D NC SFIC

3200 SERIES FUNCTION CHART

	Function	Function No.	Function Description	ANSI No.
	Double Cylinder	14	Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.	E2142
	Cylinder x Thumbturn	15	Deadbolt thrown or retracted by key from outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.	E2152
	Thumbturn w/ Blank Plate (no cylinder)	20	Deadbolt thrown or retracted by turn unit only. Outside blank plate. Bolt automatically deadlocks when fully thrown.	E21112
	Thumbturn Only (no cylinder)	21	Deadbolt thrown or retracted by turn unit only. No outside trim. Bolt automatically deadlocks when fully thrown.	E2192

Note: 3222 available for retrofit applications, converting a 3221 into a 3220.





3200 Series Grade 2 Deadlock Auxiliary and primary locking

- **Lifetime warranty**
- **Non-handed**
- **Conventional cylinder or Small Format Interchangeable Core housing available**

Standard Door Prep:	• Cylinder Hole: 2-1/8" (54 mm) Diameter (Cross Bore) • Latch Hole: 1" (25 mm) Diameter (Edge Bore)
Certifications:	• BHMA Certified ANSI A156.5 Grade 2 • ANSI A250.13 Severe Windstorm Resistant Component • UL/cUL Listed for all functions up to 3 hours for "A" label single doors • UL10C Positive Pressure Rated • UL10B Neutral Pressure Rated • ADA Thumbturn
Exposed Trim:	Wrought Brass, Bronze or Stainless Steel
Mechanism:	Steel, zinc dichromate plating
Keys:	Two operating keys supplied per lock
Cylinders/Cores:	• Brass - Keyed Different - C Keyway • Drilled 6-pin, keyed 5-pin - Standard • Other keying options, including keyed 6-pin, available from the factory • Small Format Interchangeable Core housing available • SFIC uncombined or combined, brass 6- or 7-pin sold separately
Door Thickness:	• 1-3/4" (45 mm) only - 3214 SFIC • 1-3/8" - 1-3/4" (35 mm - 45 mm) - Standard • 2" - 2-1/4" (51 mm - 57 mm) available for conventional cylinder - Must specify
Backset:	• 2-3/4" (70 mm) - Standard • 2-3/8" (60 mm) - Optional • 2-3/8" - 2-3/4" adjustable backset supplied with 3220 and 3221 (not available on 3214 or 3215)
Latchbolt:	• 1" (25 mm) Throw - Brass with concealed hardened steel roller to prevent sawing or cutting • 1-1/8" x 2-1/4" (29 mm x 57 mm) Square Corner Faceplate
Strikes:	• 3930 Square Corner, 1-1/8" x 2-3/4" (29 mm x 70 mm) with dustbox - Standard • 3929 ASA Deadbolt Strike - Optional
Functions:	14 Double Cylinder, 15 Cylinder x Thumbturn, 20 Thumbturn w/ Blank Plate, 21 Thumbturn Only
Finishes:	US3, US4, US10, US10B, US26D, US32, US32D
Notes:	3222 retrofit kit available for use with 3220/3221
Options:	• Split finish • Additional deadbolts and strikes available

