



FOR LHR DOOR ONLY

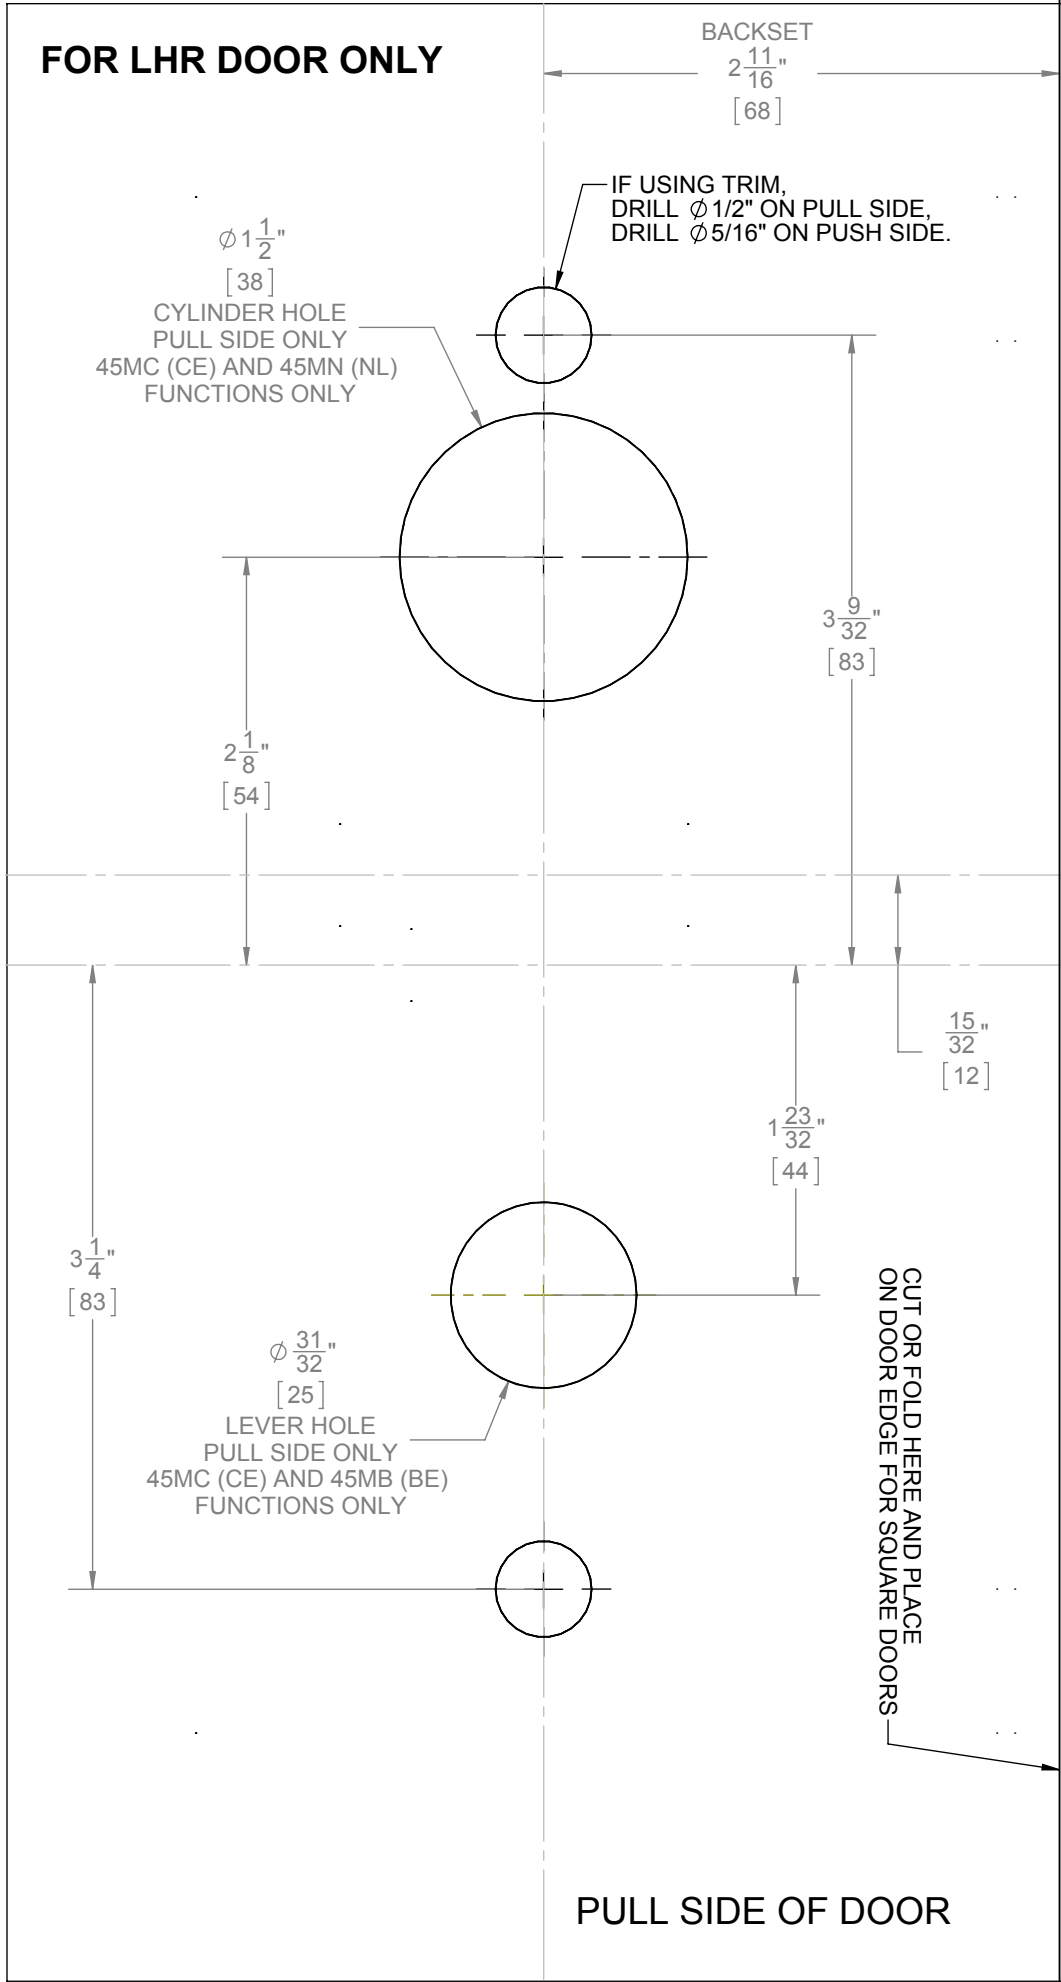


PULL SIDE OF DOOR

DRILL  $\phi 0.177"$  THRU  
TAP #12-24 THRU  
(2X)

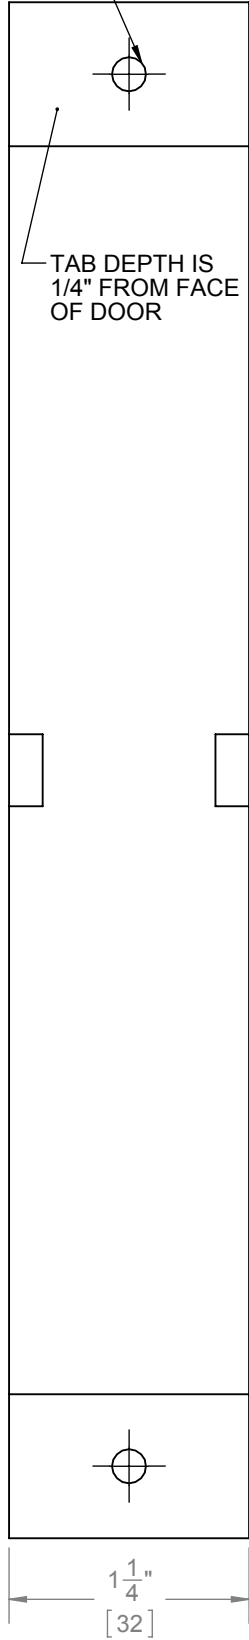

DOOR THICKNESS  
1-3/4" SHOWN

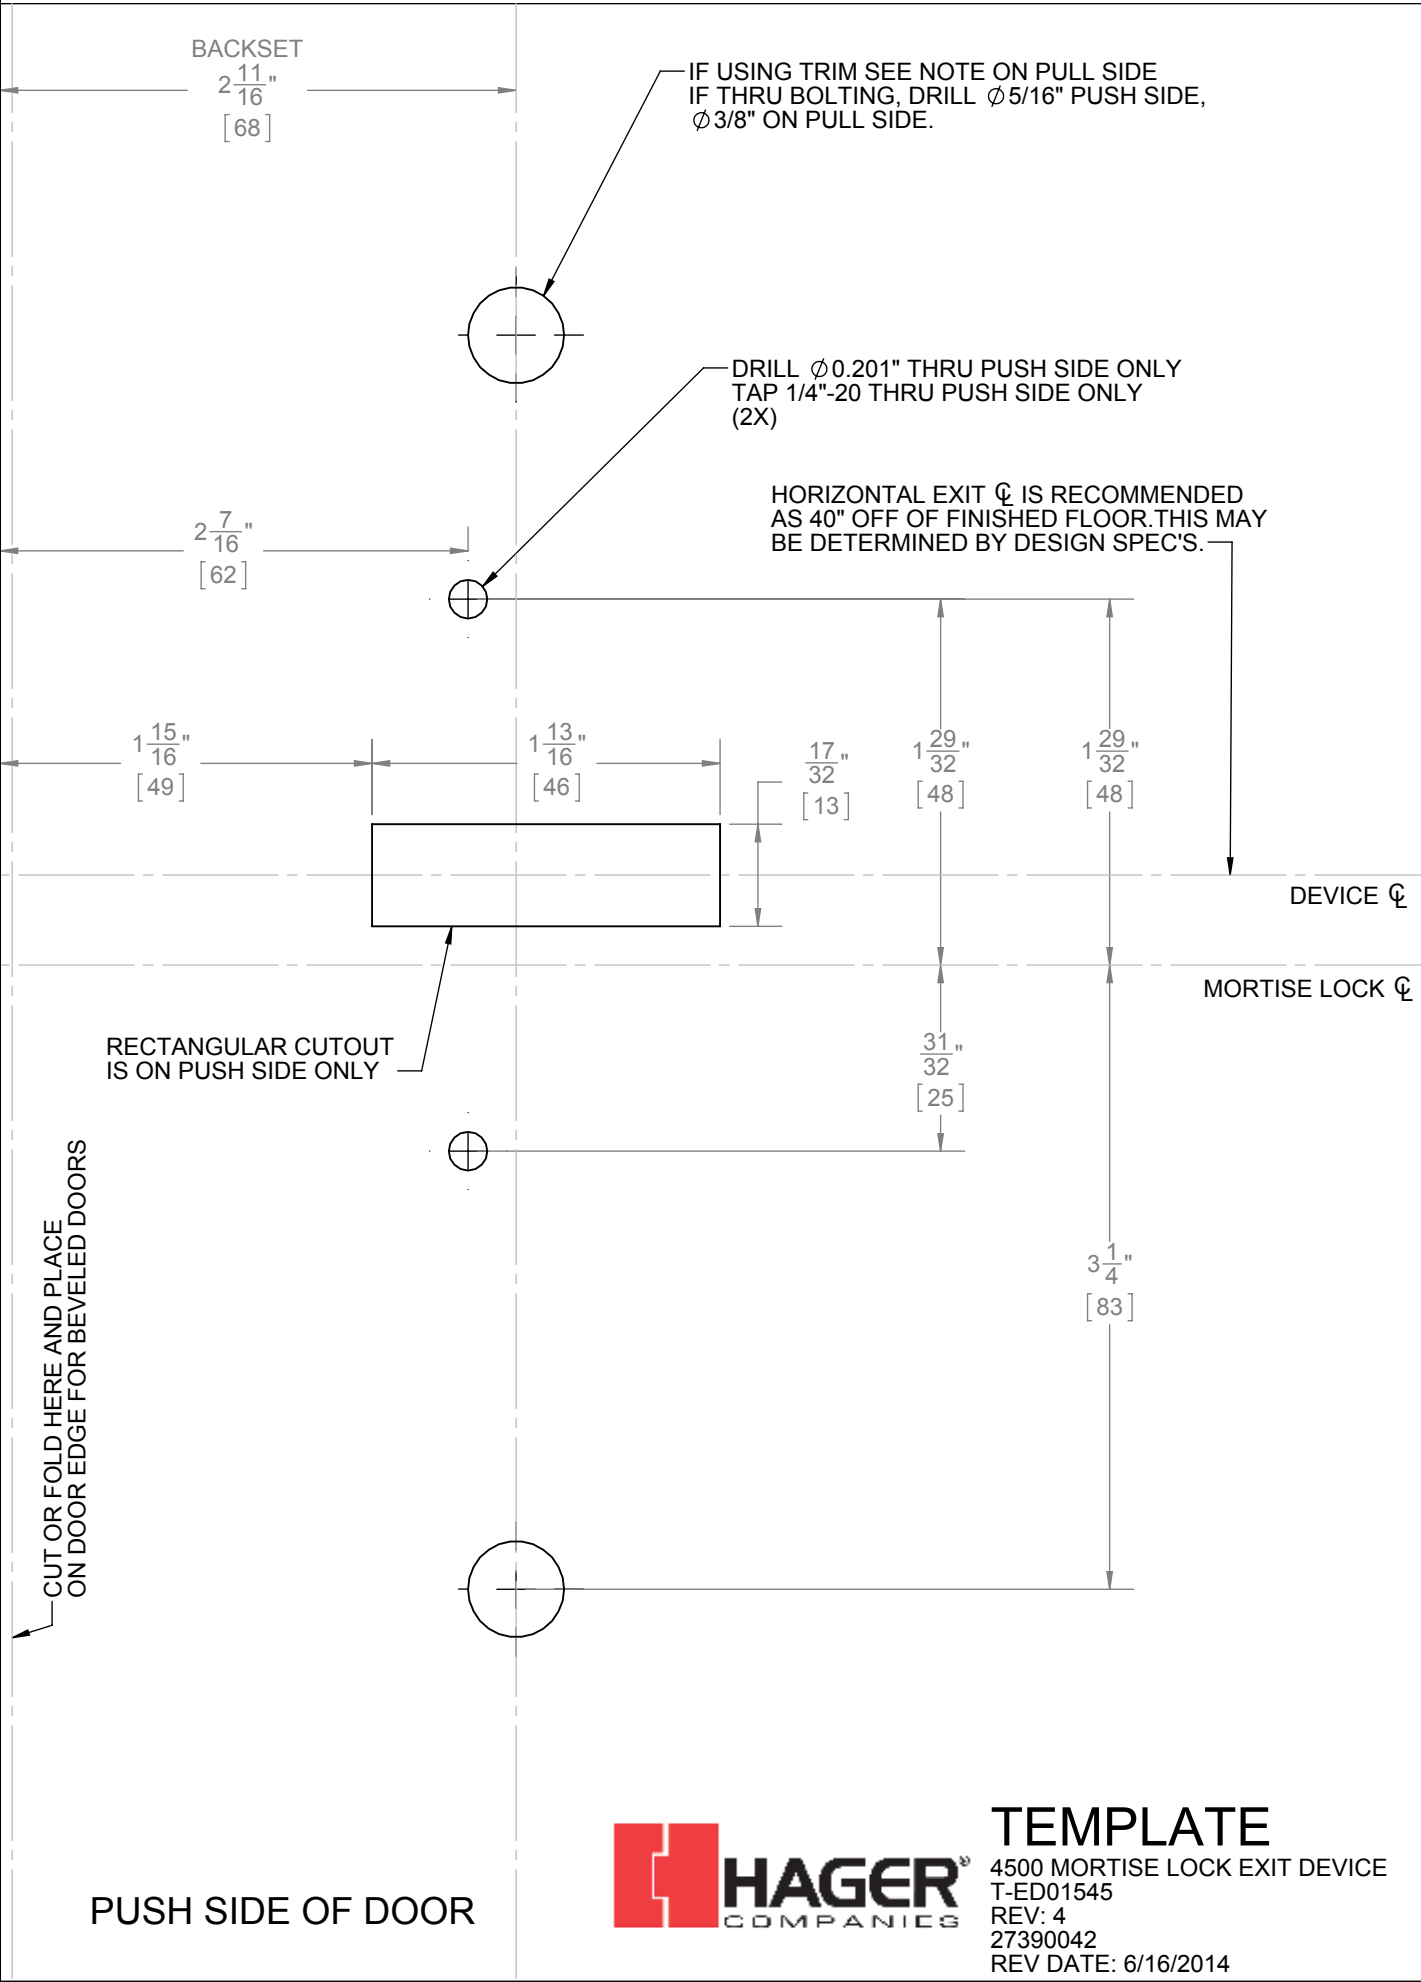


PUSH SIDE OF DOOR





TEMPLATE  
4500 MORTISE LOCK EXIT DEVICE  
T-ED01545  
REV: 4  
27390042  
REV DATE: 6/16/2014

FOR RHR DOOR ONLY

IF USING TRIM SEE NOTE ON PULL SIDE  
IF THRU BOLTING DRILL  $\varnothing 5/16"$  PUSH SIDE,  
 $\varnothing 3/8"$  ON PULL SIDE

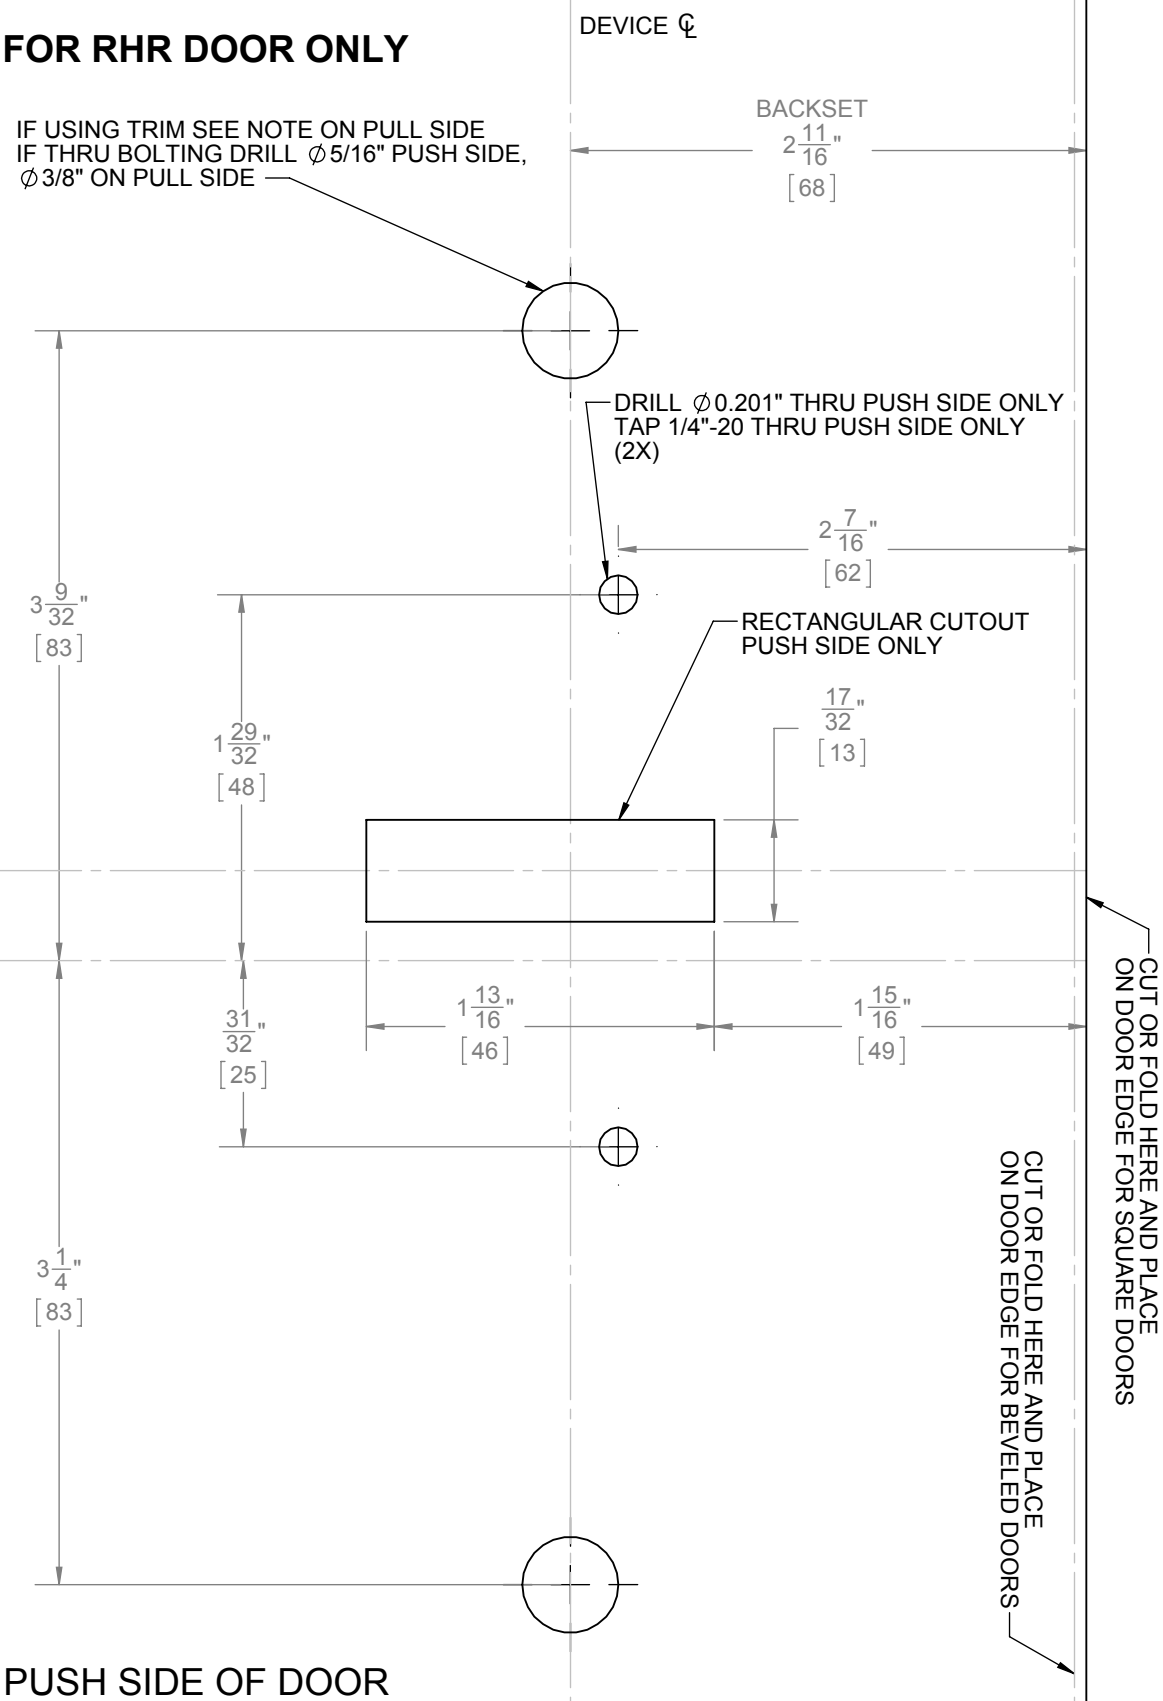

PUSH SIDE OF DOOR

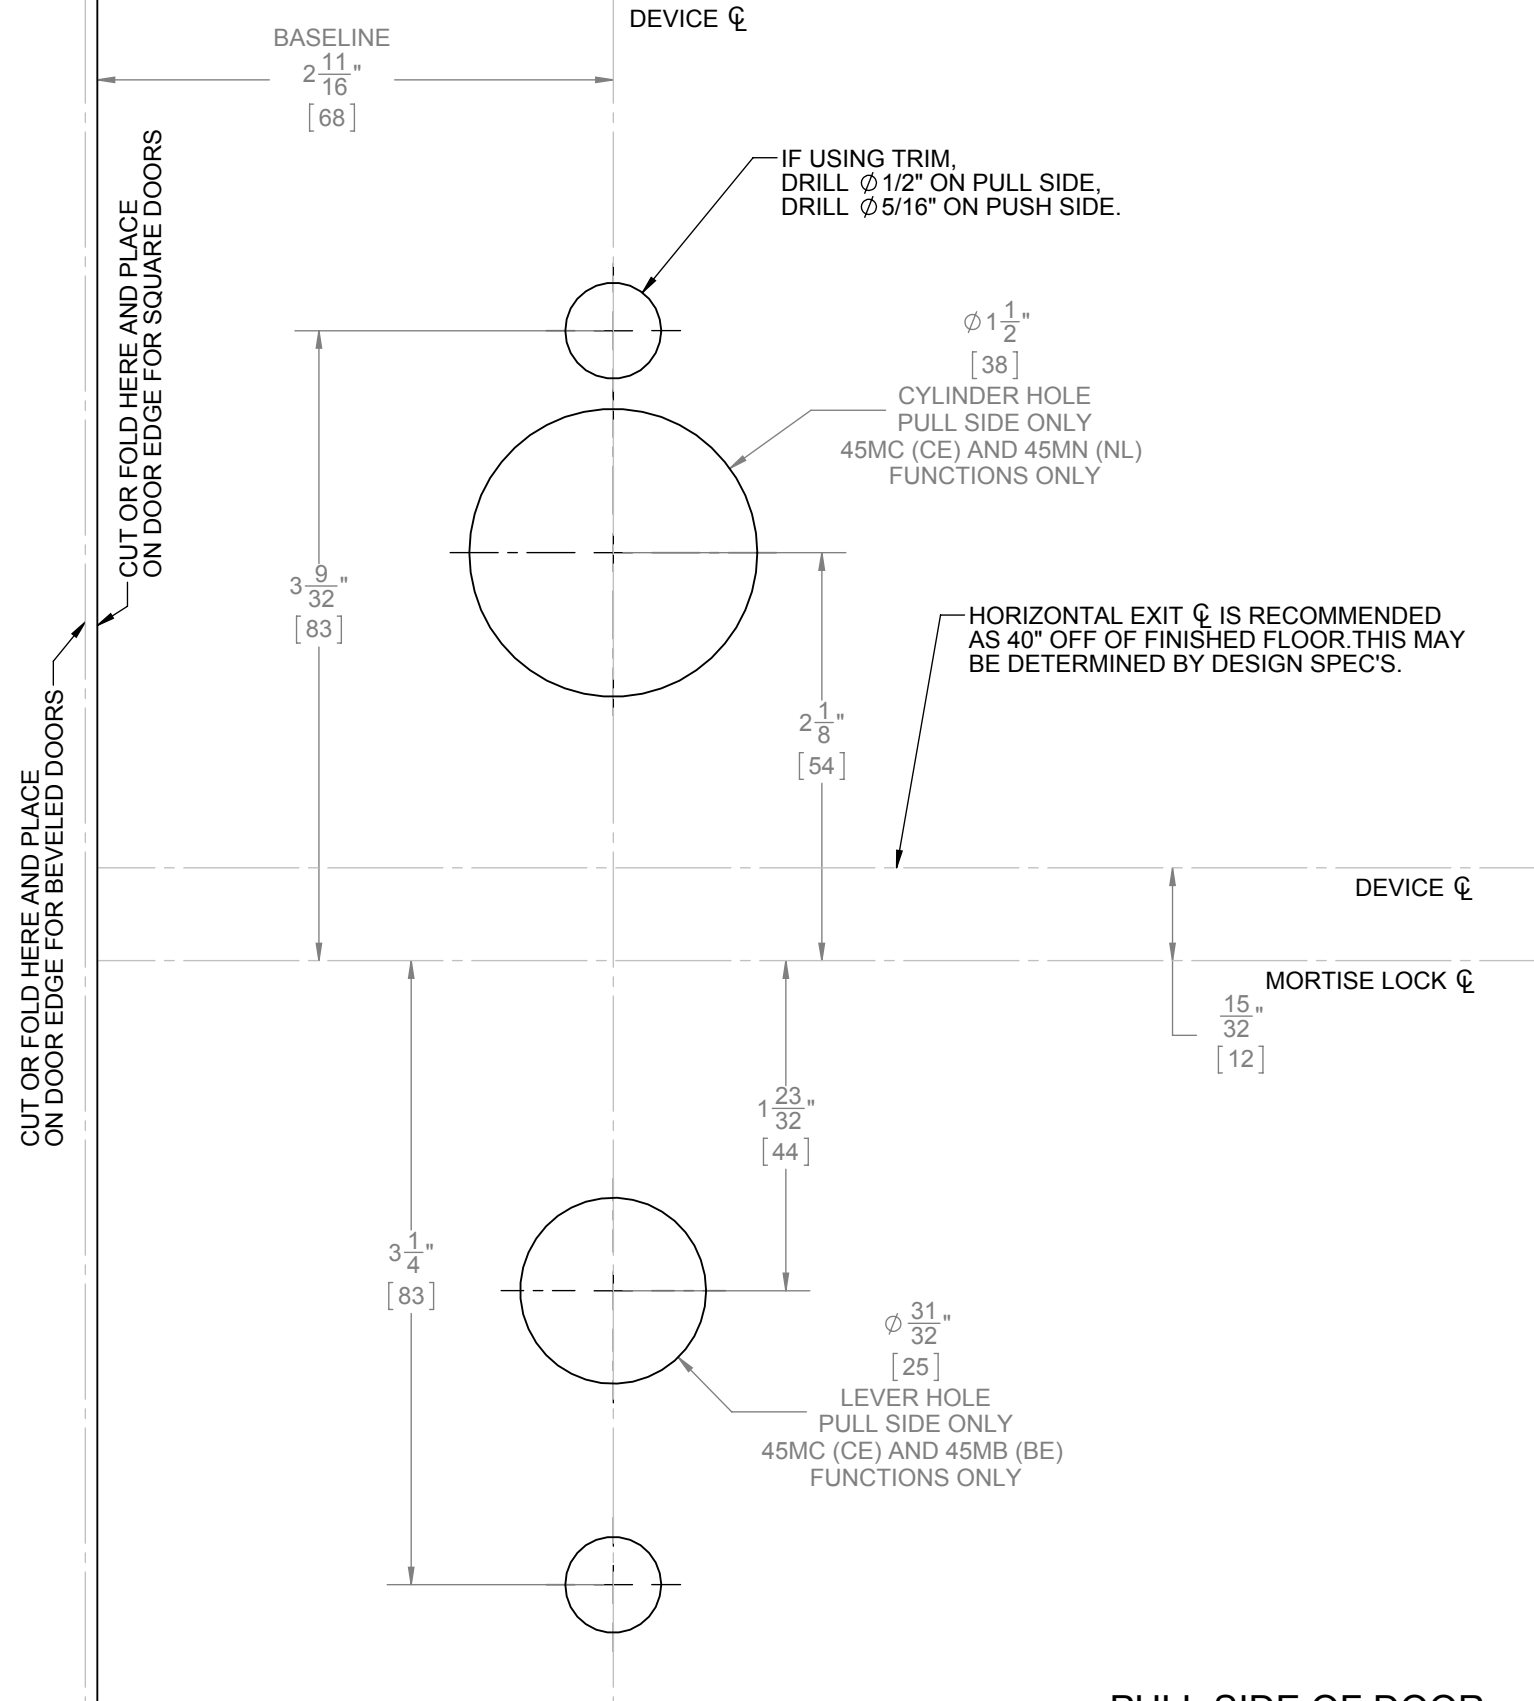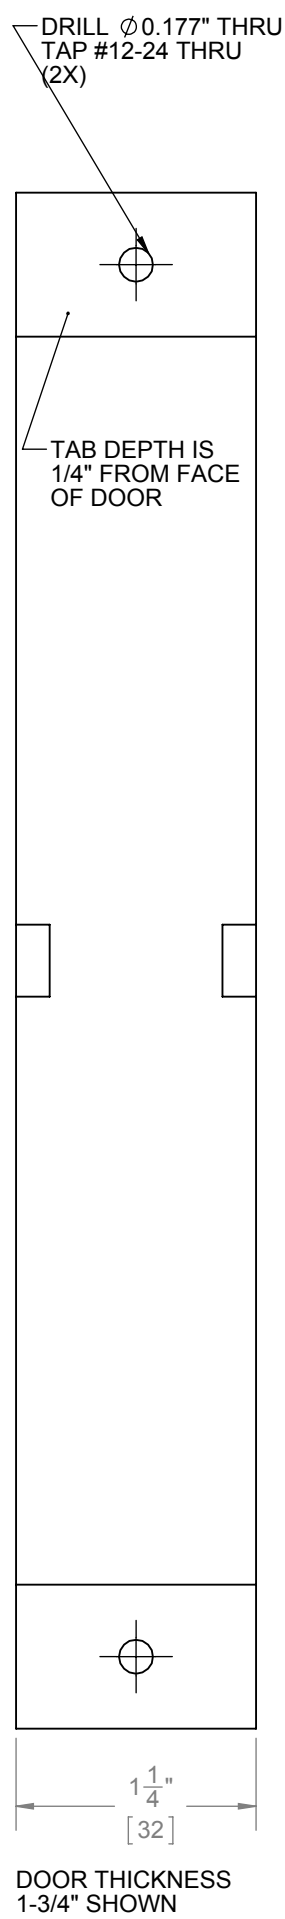

PULL SIDE OF DOOR



TEMPLATE  
4500 MORTISE LOCK EXIT DEVICE  
T-ED01545  
27390042  
REV: 4  
REV DATE: 6/16/2014

MORTISE LOCK  $\varnothing$

STRIKE  $\varnothing$

PREP STRIKE HOLE PER ANSI/BHMA A156.115-2006.  
NOTE STRIKE PREP  $\varnothing$  IS DIFFERENT THAN STANDARD.  
PREP SHOWN FOR RHR/LH HANDING.

2X  $\varnothing \frac{3}{16}$ " [4]  $\nabla \frac{9}{16}$ " [14]  
12-24 UNC  $\nabla \frac{7}{16}$ " [11]

$\frac{5}{8}$ "  
[16]

$\frac{5}{8}$ "  
[16]

$\frac{31}{32}$ " +1/32"  
-0"  
[25 +1  
0]

$1 \frac{1}{16}$ "  
[27]  
MIN

$\frac{5}{16}$ "  
[8]  
MIN

$\frac{3}{8}$ "  
[10]

$3 \frac{3}{8}$ " +1/32"  
-0"  
[86 +1  
0]

$3 \frac{1}{2}$ "  
[89]  
MIN

$4 \frac{1}{8}$ "  $\pm .005$   
[105  $\pm 0$ ]

$4 \frac{7}{8}$ " +1/32"  
-0"  
[124 +1  
0]

$\frac{3}{4}$ "  
[19]  
MAX

$\frac{3}{8}$ "  
[10]

$\frac{1}{2}$ "  
[13]  
MIN

$\frac{9}{16}$ "  
[14]  
MIN

$1 \frac{1}{4}$ " +1/32"  
-0"  
[32 +1  
0]



## TEMPLATE

4500 MORTISE LOCK EXIT DEVICE  
T-ED01545  
27390042  
REV: 4  
REV DATE: 6/16/2014