

THIS SIDE UP FOR LHR DOOR

FOLD HERE

4500 SVR EXIT DEVICE CHASSIS TEMPLATE

FOR USE WITH SVR & LBR DEVICES

(FOR PANIC AND FIRE RATED DEVICES)

(REV: 03)
DWG NO: T-ED00044
26490171

FOLD AND PLACE ON DOOR EDGE OR STOP FACE

PLACE THIS SIDE ON DOOR

4 3/8"
[111]

DOOR EDGE OR STOP FACE

DOOR

1 21/32"
[42]

1 9/16"
[40]

2 7/16"
[62]

3 7/32"
[82]

(4x) METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS.
WOOD: PRE-DRILL 1/8" HOLES.
SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,
3/8" HOLES ON PULL SIDE.
TRIM: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,
1/2" HOLES ON PULL SIDE.

5/8" CLEARANCE HOLE FOR BE & CE TRIM.
NOT REQUIRED FOR DUMMY TRIM.
FOR NL TRIM SEE INSTRUCTIONS/TEMPLATE
FOR HOLE REQUIREMENTS.

DEVICE & STRIKE \varnothing

40" [1016]
RECOMMENDED HEIGHT MAY BE
DETERMINED BY DESIGN SPEC'S

FINISHED FLOOR

(2x) METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS.
WOOD: PRE-DRILL 1/8" HOLES.
SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,
3/8" HOLES ON PULL SIDE.

19/32"
[15]

1 3/16"
[30]

19/32"
[15]

AFTER EXIT DEVICE IS CUT AND
MOUNTED, INSTALL END CAP
BRACKET CENTERED ON DEVICE \varnothing



HOLE LOCATIONS

PRIMARY DIMENSIONS SHOWN IN INCHES,
DIMENSIONS IN [] ARE MILLIMETERS.

THIS SIDE UP FOR RHR DOOR





TOP LATCH
TEMPLATE

4500 SVR EXIT DEVICE LATCH TEMPLATE
FOR USE WITH SVR & LBR DEVICES
(FOR PANIC AND FIRE RATED DEVICES)

DRAWING NO: T-ED00045 (REV: 05)
26490172

BOTTOM LATCH
TEMPLATE

(NOT REQUIRED FOR LBR DEVICE)

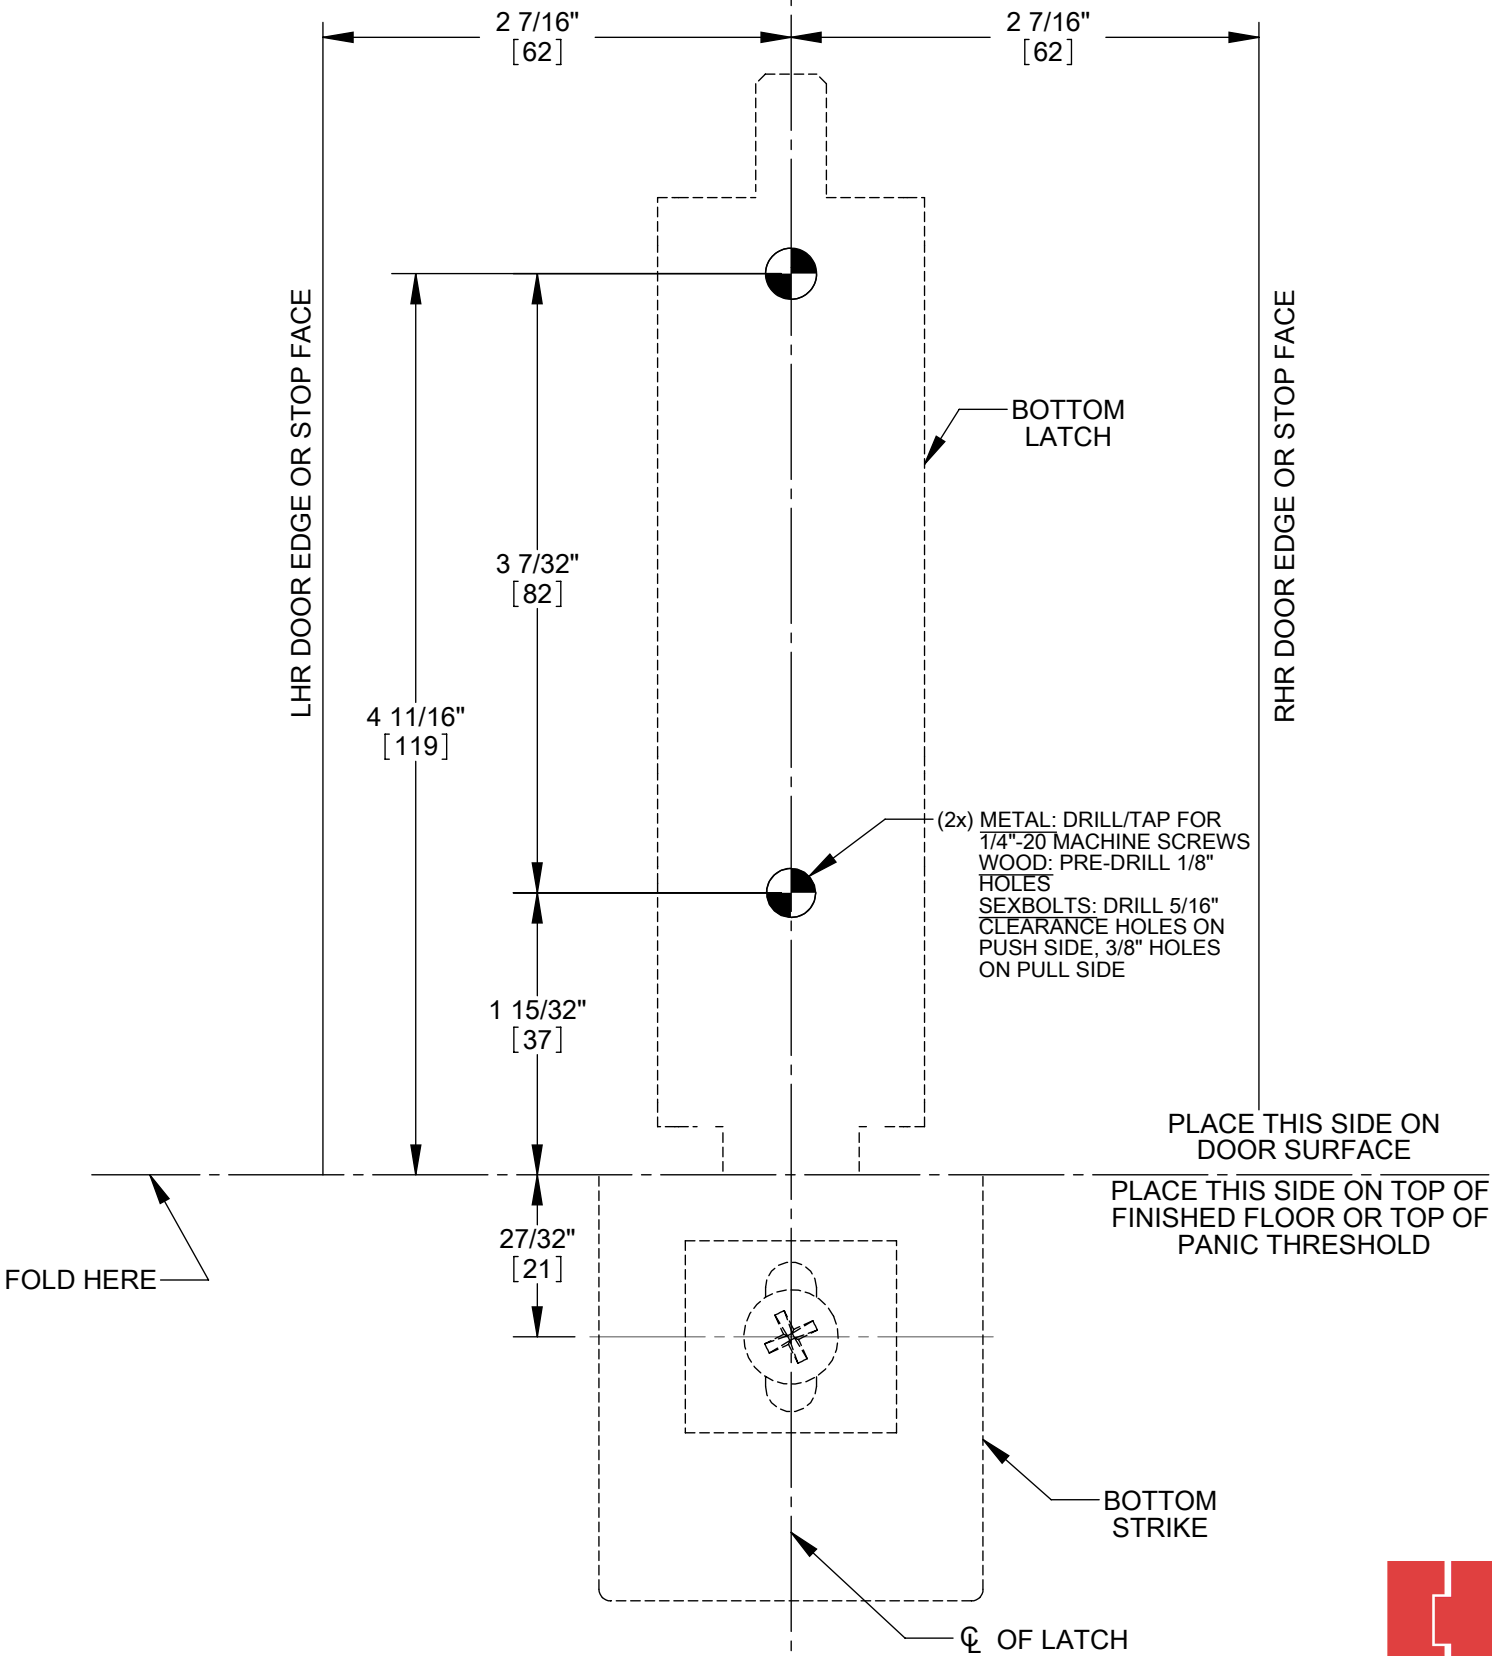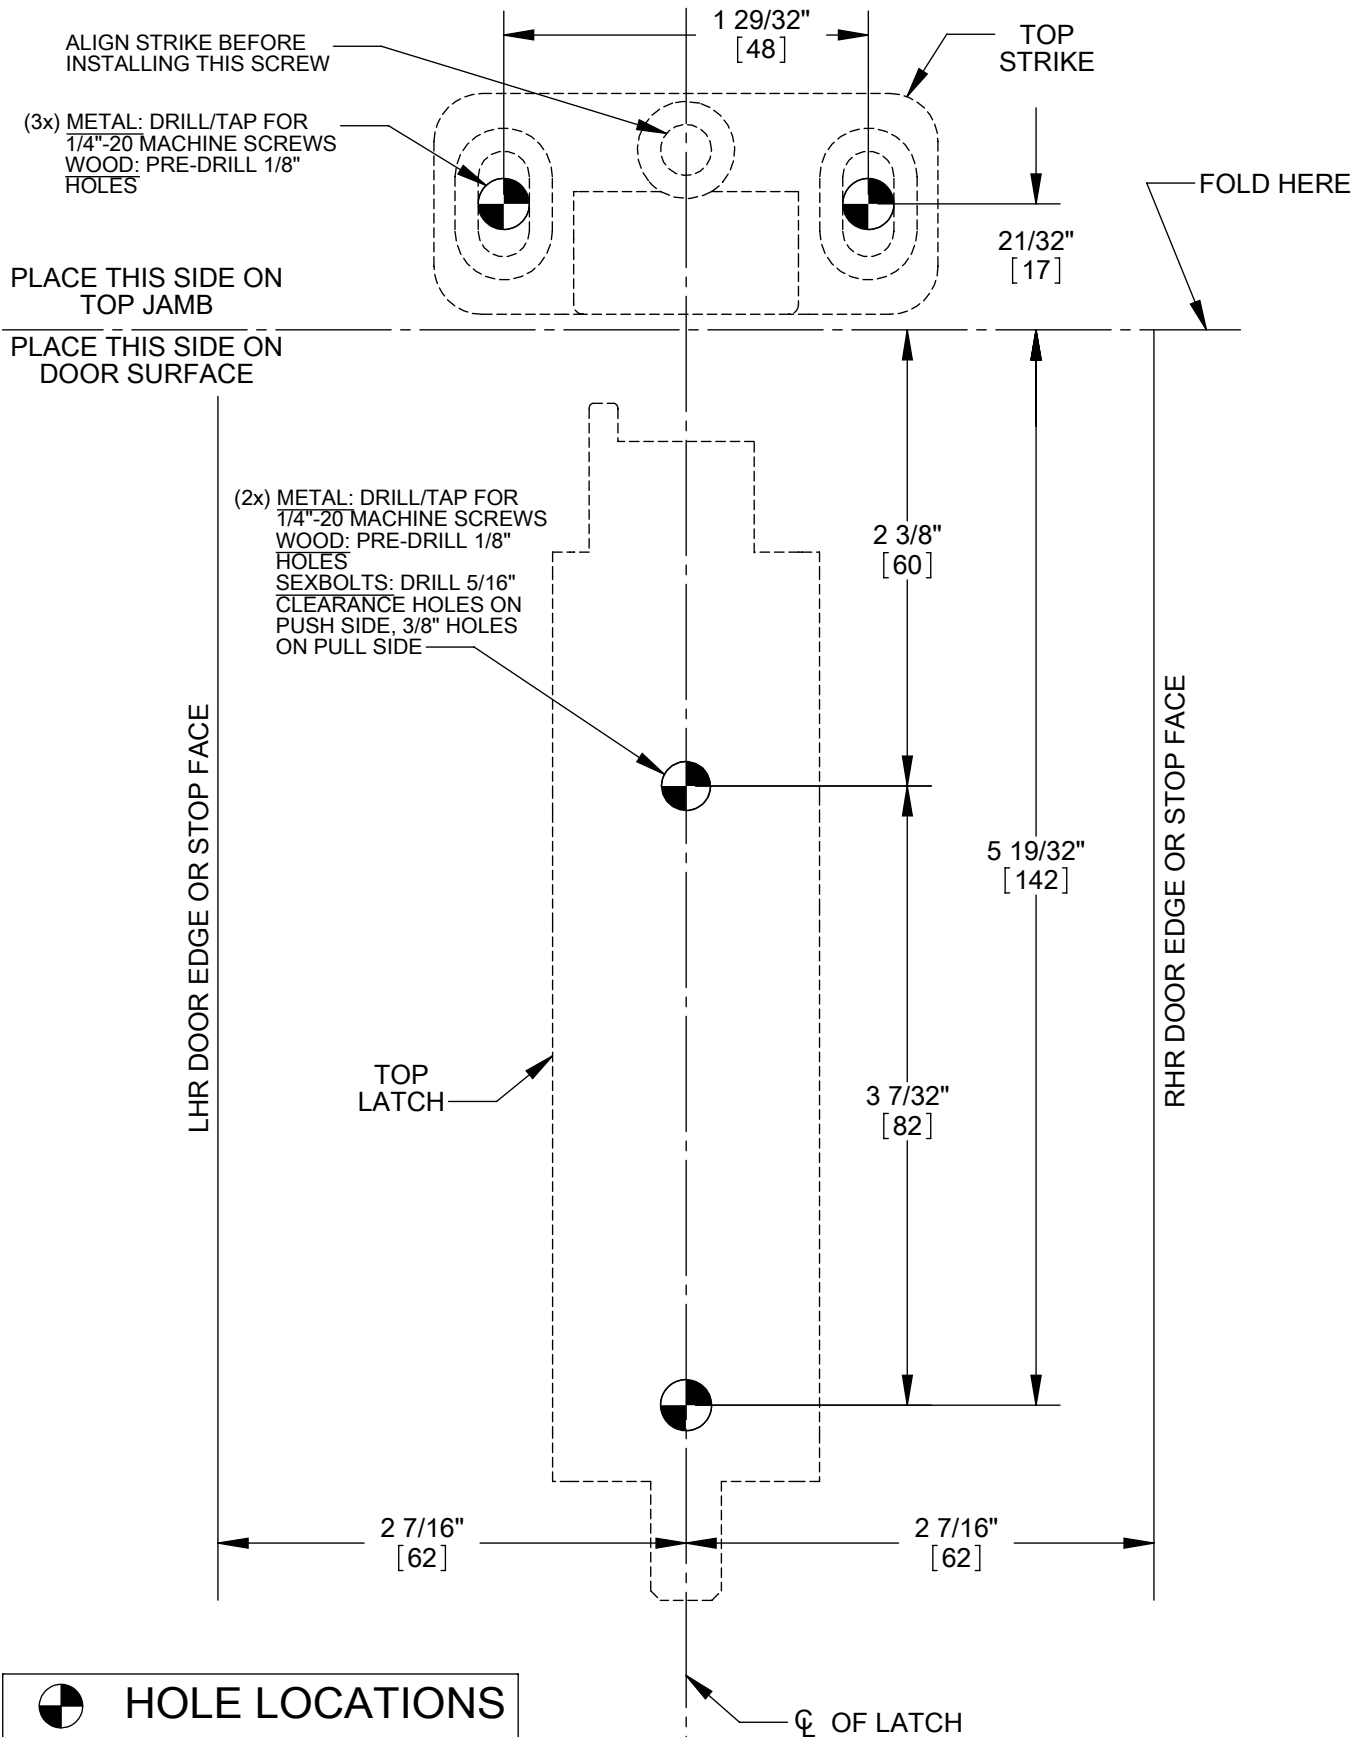

HOLE LOCATIONS

PRIMARY DIMENSIONS SHOWN IN INCHES,
DIMENSIONS IN [] ARE MILLIMETERS.

